


HELIDECK LIGHTS

HELIDECK WINDSOCK COLLAPSIBLE VERSION

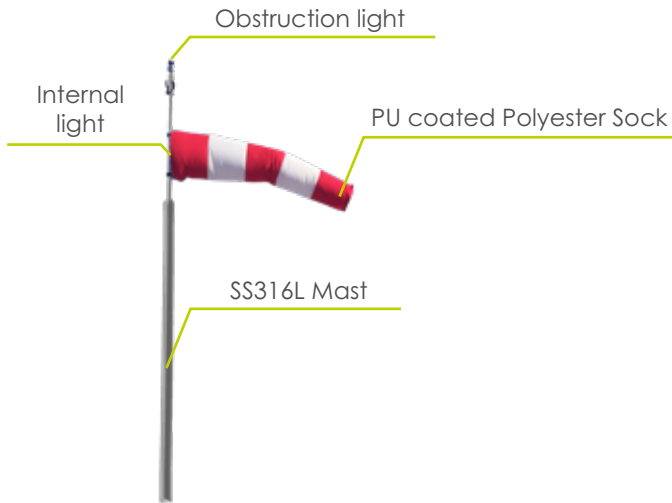

- **Sock colour: ORANGE/WHITE/RED&WHITE stripes**
- **Designed to be visible from up to 200m**
- **Collapsible mechanism***
- **Compliance: ICAO**
- **Ex marking for lights used:**
 - II 2 GD Ex de IIC T6 Gb
 - Ex tb IIIC T67°C Db, IP66

* Collapsible mechanism: when a helicopter hits the Windsock mast, the pole falls to the ground without breaking

NOTE: Lights are covered by ATEX or IECEx certificate

CERTIFICATION



COMPLIANCE



FEATURES



TYPICAL APPLICATION



HELIDECK LIGHTS

HELIDECK WINDSOCK

TECHNICAL SPECIFICATION AND DRAWING

KEY FEATURES

- Sock colour: ORANGE/WHITE/RED&WHITE stripes
- Designed to be visible from up to 200m

MECHANICAL FEATURES


- Sock material: Polyester PU coated
- Sock dimensions: 2,4m long x 0,60m mouth diameter x 0,30m tail diameter
- Mast material: SS316L natural finish (not painted), collapsible mechanism
- Mast height: 3m to windsock centerline

CERTIFICATIONS

- CE marking

COMPLIANCE

- ICAO Annex 14 Vol. II Heliports - Chapter 5
- ICAO Annex 14 Vol. I Visual Aids - Chapter 5

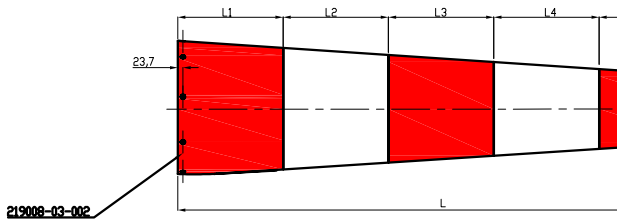

STANDARD WINDSOCK MAST WITH INTERNAL LIGHTING	
Base Plate Measurements	280x280mm
Height of Windsock above Ground	>3m
Windsock Throat Opening	600mm
Windsock Length	2400mm

