



# LUXSOLAR® CATALOGUE

## Heliport and Helideck Lighting

rev\_250108\_A



[www.luxsolar.com](http://www.luxsolar.com)

Luxsolar® is a department  
of CE2K S.r.l.



*Luxsolar and LXS – registered trademarks of CEZK S.r.l. – identify a series of special lighting suitable both for potentially explosive atmospheres and safe areas.*

*Today, after a decade marked by a growing global market presence, Luxsolar has become one of the few manufacturers in the World able to provide not only LED Aircraft Warning Lights but also a complete range of Heliport and Helideck beacons.*

*All LUXSOLAR products, designed and manufactured in Italy, are the result of a constant R&D activity performed in-house.*

*Luxsolar mission is to create innovative products that combine high-tech and sustainable features. Our aim is to offer tailor-made lighting solutions in compliance to local and international regulations for airports, heliports, marine environments and elevated structures.*

A handwritten signature in black ink, appearing to read 'V. V. V.', is positioned above the Luxsolar logo and tagline.

**LUXSOLAR**


*#everything is made for passion*

## INDEX

PRODUCT LINE FOR SURFACE HELIPORT.....	4
PRODUCT LINE FOT ELEVATED HELIPORT.....	5
<b>HELIPORT LIGHTS - SAFE AREA</b>	
PERIMETER LIGHT TLOF.....	8
PERIMETER LIGHT FATO.....	10
PERIMETER LIGHT TLOF-LXS-INSET.....	12
PERIMETER LIGHT FATO-LXS-INSET.....	14
AIMING POINT LIGHT INSET .....	16
FLIGHT PATH ALIGNMENT GUIDANCE LIGHT INSET.....	18
TDPC LIGHTING - LIGHTING SECTIONS .....	20
PERIMETER LIGHT - TLOF FLAT.....	22
PERIMETER LIGHT - FATO FLAT.....	24
H MARKING LIGHTING - LIGHTING SECTIONS.....	26
CROSS CHEVRON LIGHTING - LIGHTING SECTIONS .....	28
HELIPORT BEACON - HB .....	30
APPROACH LIGHT - FLASHING LIGHT .....	34
APPROACH LIGHT - STEADY BURNING LIGHT .....	38
HELIHOIST STATUS LIGHT .....	42
HELIPORT WINDSOCK.....	46
HELIPORT FLOODLIGHT.....	50
REPEATER STATUS LIGHT .....	54
LXS PORTABLE LIGHTING SYSTEM LXS-RESCUE .....	60
RADIO RECEIVER.....	64
<b>HELIDECK LIGHTS - HAZARDOUS AREA</b>	
PRODUCT LINE FOR HELIDECK.....	68
HELIDECK LIGHTS - HAZARDOUS AREA.....	70
REPEATER STATUS LIGHT EX D IIC.....	76
HELIDECK STATUS WAVE OFF LIGHT.....	78
REPEATER LIGHT EX .....	80
HELIDECK WINDSOCK .....	82

# HELIPORT AND HELIDECK LIGHTS

## TYPICAL INSTALLATION SURFACE LEVEL HELIPORT (Land)

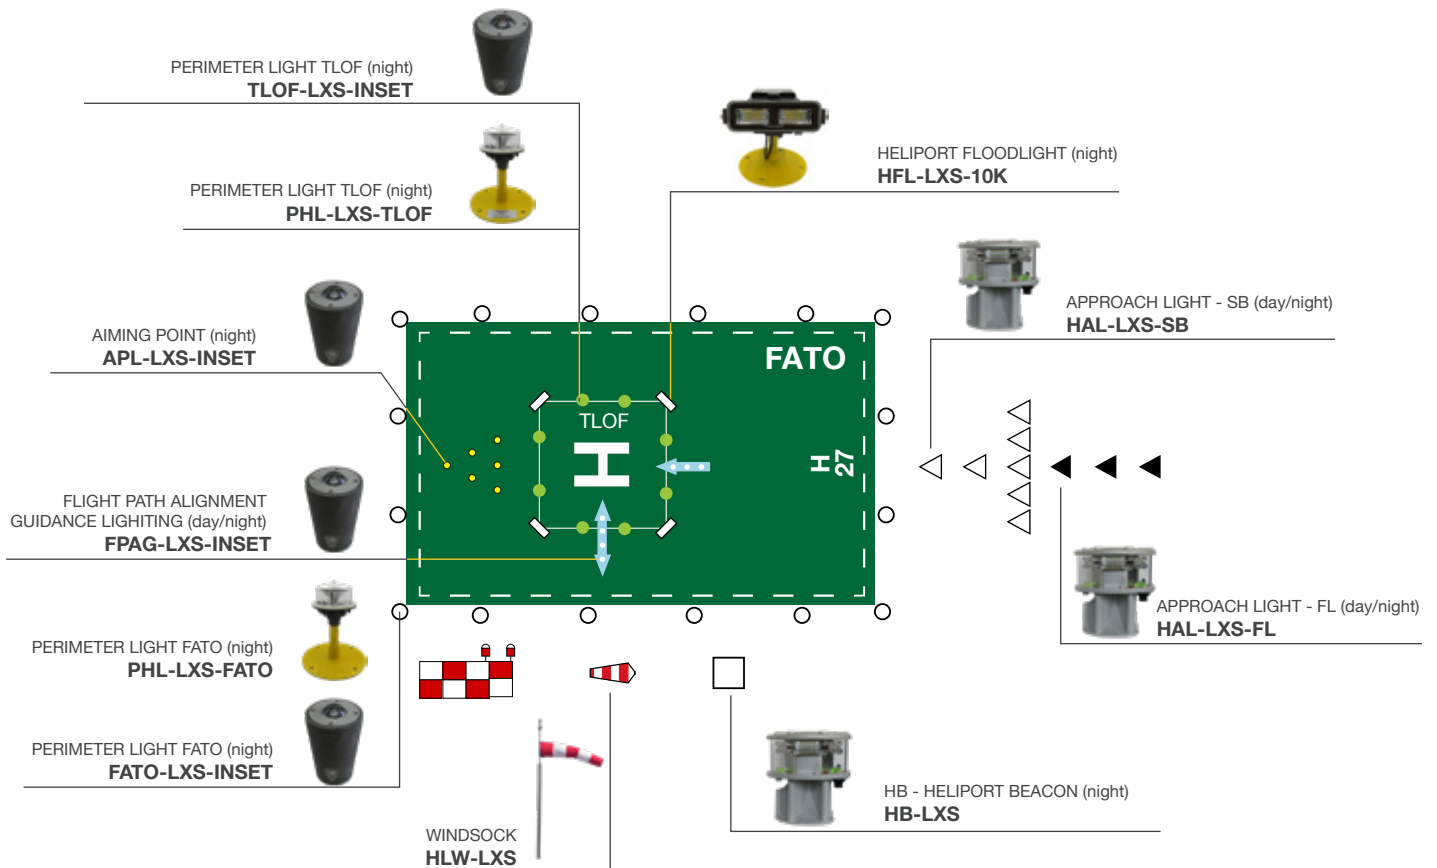

### LEGEND

HB - HELIPORT BEACON - <b>HB-LXS</b>	HELIPORT FLOODLIGHT - <b>HFL-LXS-10K</b>	OBSTRUCTION LIGHT*
APPROACH LIGHT Steady Burning - <b>HAL-LXS-SB</b>	PERIMETER LIGHT FATO - <b>PHL-LXS-FATO</b>	WINDSOCK - <b>HLW-LXS</b>
APPROACH LIGHT Flashing Lights - <b>HAL-LXS-FL</b>	PERIMETER LIGHT TLOF - <b>PHL-LXS-TLOF</b> or <b>TLOF-LXS-INSET</b>	
AIMING POINT LIGHT - <b>APL-LXS-ONE-INSET</b>	FLIGHT PATH ALIGNMENT GUIDANCE LIGHTING - <b>FPAG-LXS-ONE-INSET</b>	

**Heliport:** an aerodrome or a defined area intended to be used for the arrival, departure and surface movement of helicopters.

(ICAO Aerodromes Annex 14 - Volume II Heliports - International Standards and Recommended Practices - Chapter 1.1-Definitions)


\*OBSTRUCTION LIGHT: LUXSOLAR has a complete product range for obstruction light.  
Download Obstruction light catalogue at [www.luxsolar.com](http://www.luxsolar.com)



# HELIPORT AND HELIDECK LIGHTS

## TYPICAL INSTALLATION

### ELEVATED HELIPORT (Skyscrapers, Buildings)

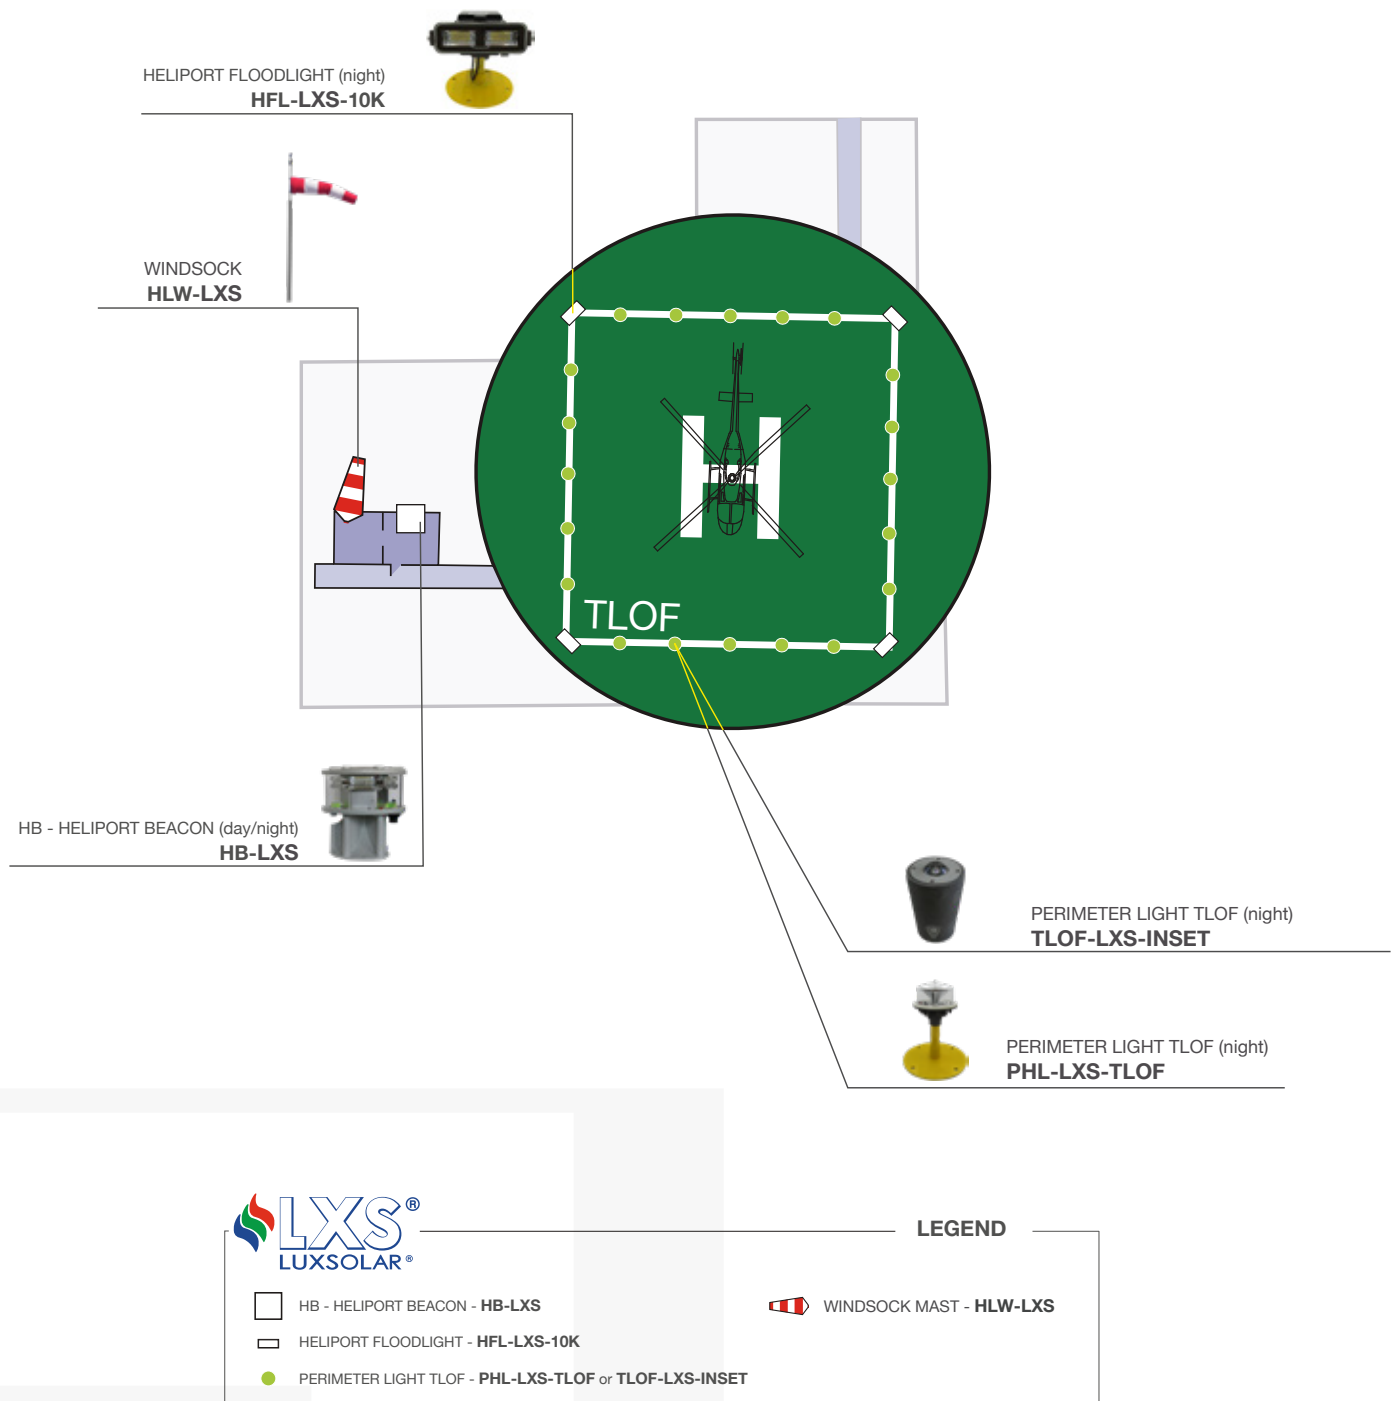

**Elevated Heliport:** heliport located on a raised structure on land.

(ICAO Aerodromes Annex 14 - Volume II Heliports - International Standards and Recommended Practices - Chapter 1.1-Definitions)









# HELIPORT LIGHTS



## PERIMETER LIGHT - TLOF ELEVATED PHL-LXS-TLOF



- **Steady burning GREEN light**
- Long life time >10 years life expectancy
- Low consumption
- **Stabilised light output**
- **Lightweight and compact**
- Low wind load factor
- Easy to install
- No RF-radiations

**PATENTED**

## INSTALLATION MAPS

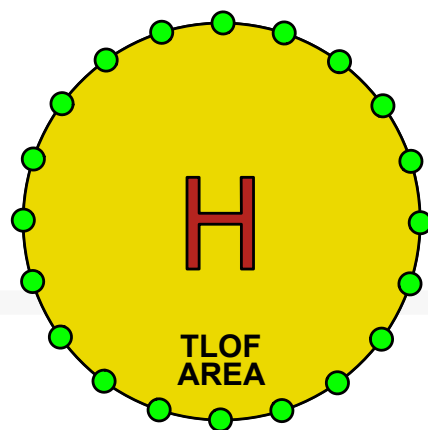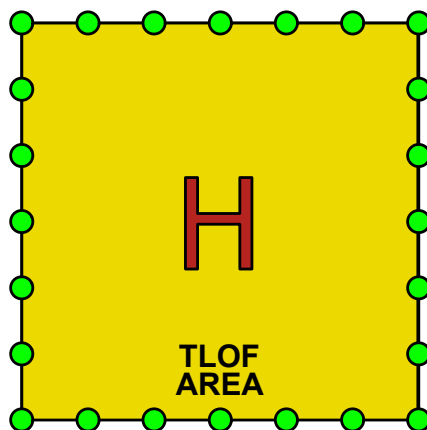

### CERTIFICATION



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## PERIMETER LIGHT - TLOF ELEVATED TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal beam radiation 360°
- Optical reflector

Elevation (E)	Luminous Intensity
$20^{\circ} < E \leq 90^{\circ}$	3 cd
$13^{\circ} < E \leq 20^{\circ}$	8 cd
$10^{\circ} < E \leq 13^{\circ}$	15 cd
$5^{\circ} < E \leq 10^{\circ}$	30 cd
$2^{\circ} \leq E \leq 5^{\circ}$	15 cd

-180° Azimuth +180°

### MECHANICAL FEATURES

- Anodised aluminium body with heat-sink pins for maximum heat dissipation
- Polycarbonate UV resistant dome
- Polyurethane foam
- Degree of protection: IP66
- Operating temperature: -20°C to +50°C
- Lamp c/w support unit weight: 2,5kg
- Anticondensation Goretex valve
- Frangible support included

### COMPLIANCE

- ICAO Aerodromes -Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN

### ELECTRICAL FEATURES

- Power Supply:
  - 24 VDC stand-alone version
  - 115/230 VAC stand-alone version
  - From control panel for light system
- Power consumption: 4W
- LED feeded at constant current

### OPTIONS

- Adjustable intensity OFF -3%, -10%, -100% from control panel only
- IR Wavelength - 850nm, compatible with pilot's NVG

### CERTIFICATIONS



- EASA and ICAO test report (EN17025 laboratory) nr. 326-QL20-R08
- CE marking

### ORDER CODE

PHL-LXS-TLOF-

DC = 24 VDC  
AC = 115/230 VAC  
8 = From Control Panel


IR = Infrared

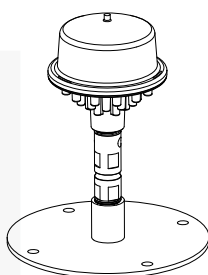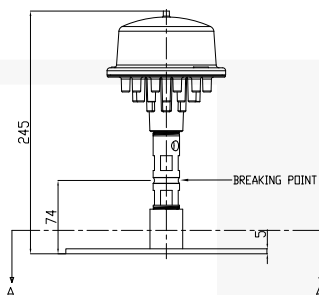

24 VDC version



115/230 VAC version

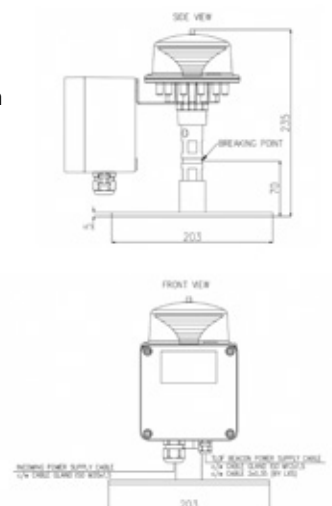

# HELIPORT LIGHTS



## PERIMETER LIGHT - FATO ELEVATED PHL-LXS-FATO



- **Steady burning WHITE light**
- **Long life time >10 years life expectancy**
- **Low consumption**
- **Stabilised light output**
- **Lightweight and compact**
- **Low wind load factor**
- **Easy to install**
- **No RF-radiations**

**PATENTED**

## INSTALLATION MAPS

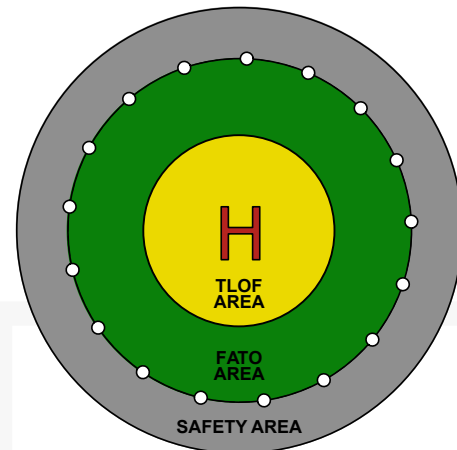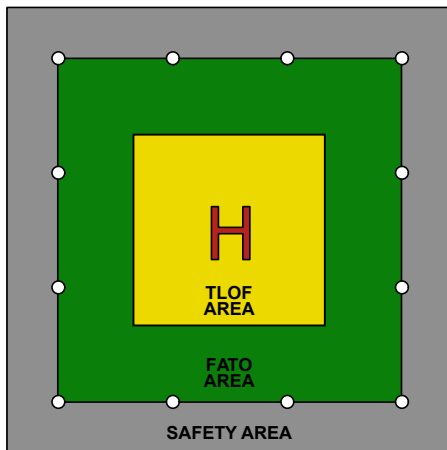

### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## PERIMETER LIGHT - FATO ELEVATED TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal beam radiation 360°
- Optical reflector

Elevation	Luminous Intensity
30°	10 cd
25°	50 cd
20°	100 cd
10°	100 cd
3°	100 cd
0°	10 cd

-180° Azimuth +180°

### MECHANICAL FEATURES

- Anodised aluminium body with heat-sink pins for maximum heat dissipation
- Polycarbonate UV resistant dome
- Polyurethane foam
- Degree of protection: IP66
- Operating temperature: -20°C to +50°C
- Lamp c/w support unit weight: 2,5kg
- Anticondensation Goretex valve
- Frangible support included

### COMPLIANCE

- ICAO Aerodromes -Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN

### ELECTRICAL FEATURES

- Power Supply:
  - 24 VDC stand-alone version
  - 115/230 VAC stand-alone version
  - From control panel for light system
- Power consumption: 4W
- LED feeded at constant current




### OPTIONS

- Adjustable intensity OFF -3%, -10%, -100% from control panel only
- IR Wavelength - 850nm, compatible with pilot's NVG

### CERTIFICATIONS

- CE marking



### ORDER CODE

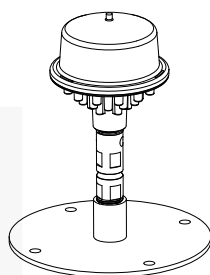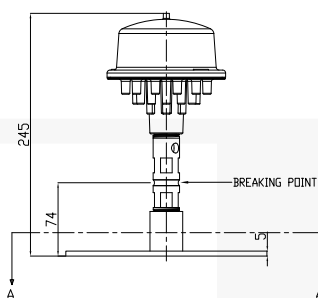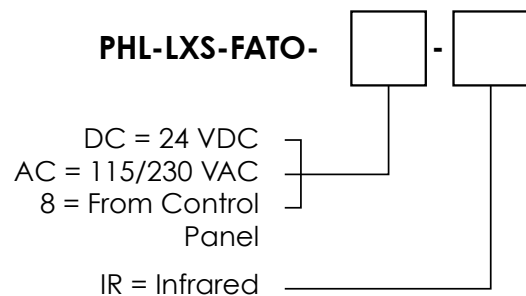

24 VDC version



115/230 VAC version

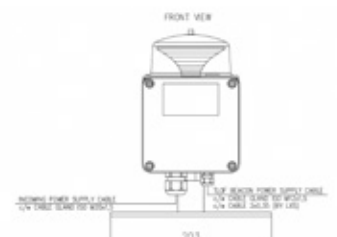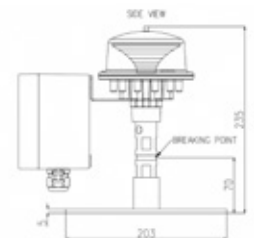

# HELIPORT LIGHTS

## PERIMETER LIGHT - TLOF INSET TLOF-LXS-INSET





**Defines the perimeter of TLOF.** As it is built-in, it requires the construction of a well in the flooring of the surface. Suitable for both ground and elevated platforms.

- Steady green light
- Lifetime higher than 10 years
- Low consumption
- Stabilised light output
- Compact and light structure
- Easy to install
- No RF-radiations



## INSTALLATION MAPS

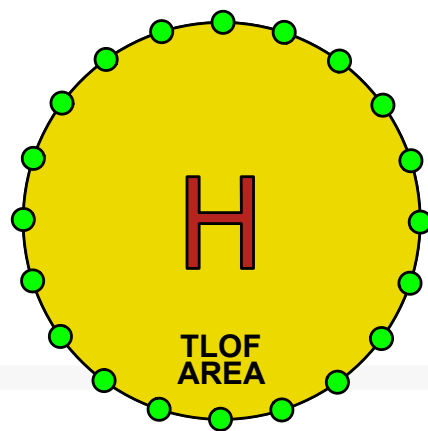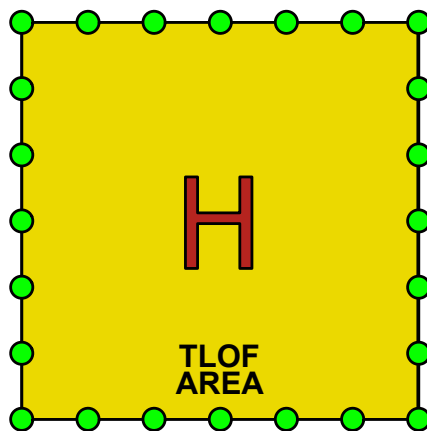

### LEGEND

● TLOF-LXS-INSET

*NOTE: the number of TLOF perimeter lights required by legislation is strictly dependent on the size of the TLOF area in question.*

*On elevated platforms, in most cases the TLOF area coincides with the FATO area, so the installation of TLOF perimeter lights only is required.*

### CERTIFICATION



### FEATURES





# HELIPORT LIGHTS

## PERIMETER LIGHT - TLOF INSET TECHNICAL SPECIFICATIONS

### OPTICAL FEATURES

- Horizontal emission: 360°
- PMMA and tempered glass lenses

Elevation (E)	Luminous Intensity
$20^{\circ} < E \leq 90^{\circ}$	3 cd
$13^{\circ} < E \leq 20^{\circ}$	8 cd
$10^{\circ} < E \leq 13^{\circ}$	15 cd
$5^{\circ} < E \leq 10^{\circ}$	30 cd
$2^{\circ} \leq E \leq 5^{\circ}$	15 cd

-180° Azimuth +180°

### MECHANICAL FEATURES

- SS316 body
- NBR o-ring
- Degree of protection: IP68 (1,2 m x 45 min)
- Shallow base 5"
- Operating temperature: -20°C to +60°C
- Supplied with 30cm LUXSOLAR standard cable
- Weight: 4,8kg
- Tempered glass max load 5 ton

### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN

### ELECTRICAL FEATURES

- Power Supply:
  - 24 VDC stand-alone version
  - From control panel for light system
- Consumption: 3,7W @12/24Vdc
- Constant current driven LED
- Light intensity adjustment: 10% - 30% - 100%


### OPTIONS

- Adaptor for shallow base 8" / 12"
- Wave lenght IR: 850nm, compatible with NVG pilot

### CERTIFICATION


- CE marking
- ICAO/EASA test report nr.1407-QL22-R01 (lab. EN17025)

### ORDER CODE

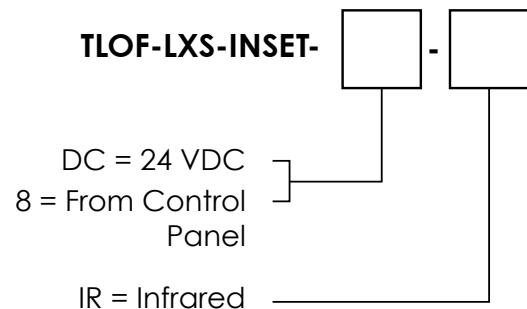


## TECHNICAL DRAWINGS

TOP VIEW

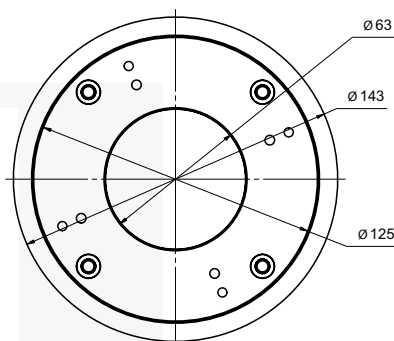

SIDE VIEW

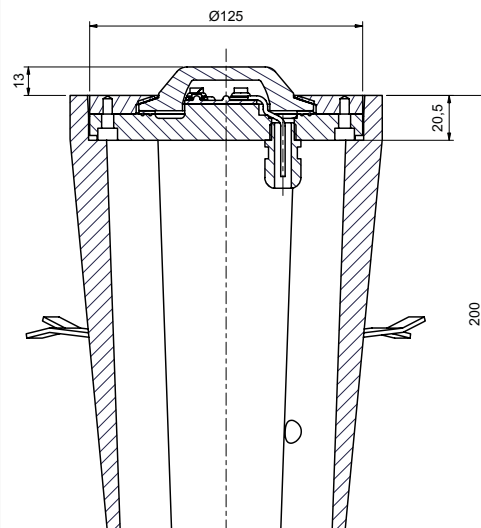

# HELIPORT LIGHTS

## PERIMETER LIGHT - FATO INSET FATO-LXS-INSET





**PATENTED**

Installed at the edges of the FATO AREA, defining its perimeter. It has a recessed and driveway structure that requires the construction of a well inside the flooring of the surface. Alternatively, it is possible to install the product code PHL-LXS-FATO or FATO-LXS-FLT.

- Steady white light
- Lifetime higher than 10 years
- Low consumption
- Stabilised light output
- Compact and light structure
- Easy to install
- No RF-radiations

## INSTALLATION MAPS

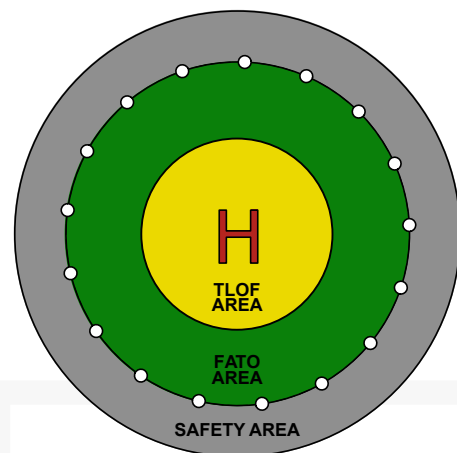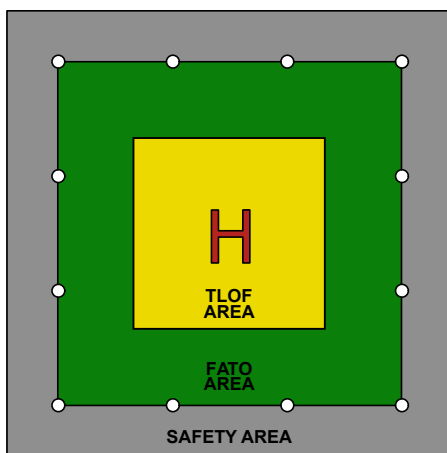

### LEGEND

○ PHL-LXS-FATO

NOTE: for HEMS elevated surfaces, the FATO area coincides with TLOF area therefore, in the major part of installations, FATO perimeter lights are not provided.

### CERTIFICATION



### FEATURES



# HELIPORT LIGHTS

## PERIMETER LIGHT - FATO INSET TECHNICAL SPECIFICATION

### OPTICAL FEATURES

- Horizontal emission: 360°
- PMMA and tempered glass lenses

Elevation (E)	Luminous Intensity
30°	10 cd
25°	50 cd
20°	100 cd
10°	
3°	
0°	10 cd
-180° Azimuth +180°	

### MECHANICAL FEATURES

- SS316 body
- NBR o-ring
- Degree of protection IP68 (1,2mx45min)
- Shallow base 5"
- Operating temperature: -20°C to +60°C
- Supplied with 30cm LUXSOLAR standard cable
- Weight: 4,8 Kg
- Tempered glass max load 5 ton

### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN

### ELECTRICAL FEATURES

- Power Supply:
  - 24 VDC stand-alone version
  - From control panel for light system
- Consumption: 3,7W @12/24Vdc
- Constant current driven LED
- Light intensity adjustment: 10% - 30% - 100%

### OPTIONS

- Adaptor for shallow base 8"/ 12"
- IR wavelength: 850nm, compatible with NVG pilot

### CERTIFICATION

- CE marking
- ICAO/EASA test report 1407-QL22-R04 (lab. EN17025)

### ORDER CODE


**FATO-LXS-INSET-**

DC = 24 VDC  
8 = From Control Panel


IR = Infrared

## TECHNICAL DRAWINGS

TOP VIEW

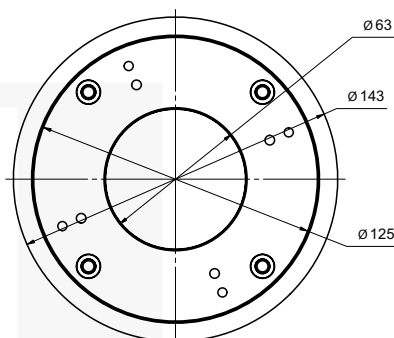

SIDE VIEW

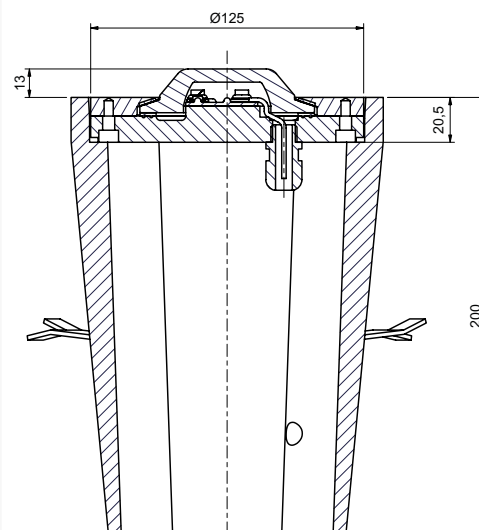

# HELIPORT LIGHTS


## AIMING POINT LIGHT INSET APL-LXS-INSET



An aiming point lighted marking should be provided at a heliport where it is necessary to make an approach to a particular point above a FATO before proceeding to a TLOF.

- **Steady burning WHITE light**
- Long life time >10 years life expectancy
- Low consumption
- **Stabilised light output**
- **Easy to install**
- **No RF-radiations**
- Compact and light structure

**PATENTED**

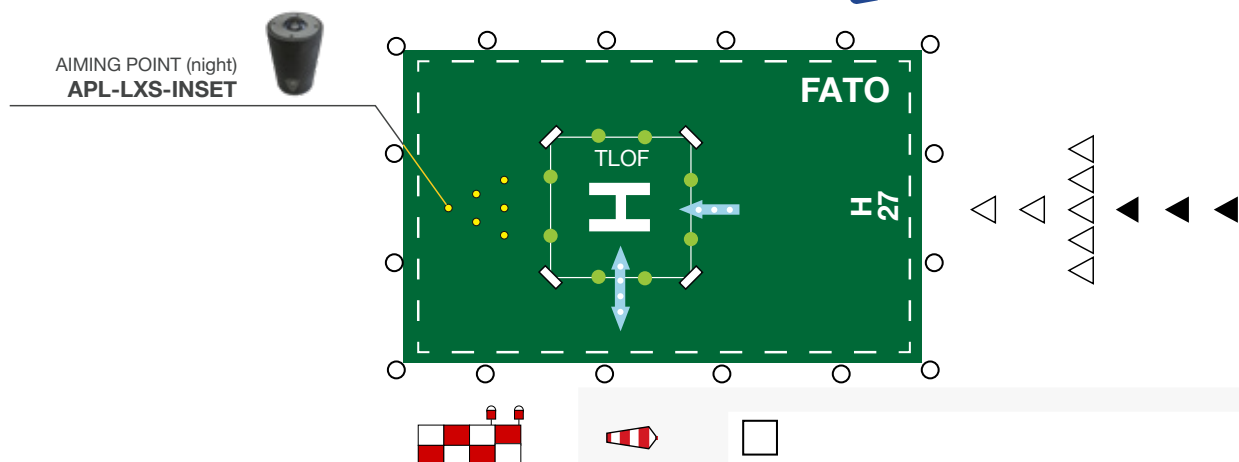

### CERTIFICATION



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## AIMING POINT LIGHT INSET TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal emission: 360°
- PMMA and tempered glass lens

Elevation (E)	Luminous Intensity
30°	10 cd
25°	50 cd
20°	100cd
10°	100cd
3°	100 cd
0°	10 cd

-180° Azimuth +180°

### MECHANICAL FEATURES

- SS316 body
- NBR o-ring
- Tempered glass max load 5 ton.
- Degree of protection IP68 (1,2mx45min)
- Shallow base dimension: 5"
- Operating temperature: -20°C to +60°C
- Lamp unit weight c/w shallow base 4,8Kg

### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN

### ELECTRICAL FEATURES

- Power Supply:
  - 24 VDC stand-alone version
  - From control panel for light system
- Consumption: 3,7W @12/24Vdc
- Constant current driven LED
- Light intensity adjustment: 10% - 30% - 100%


### OPTIONS

- 8" / 12" shallow base adapter
- IR wavelength 850nm, compatible with NVG pilot

### CERTIFICATIONS


- ICAO/EASA test report (EN17025 laboratory) nr. 1407-QL22-R04
- CE marking

### ORDER CODE

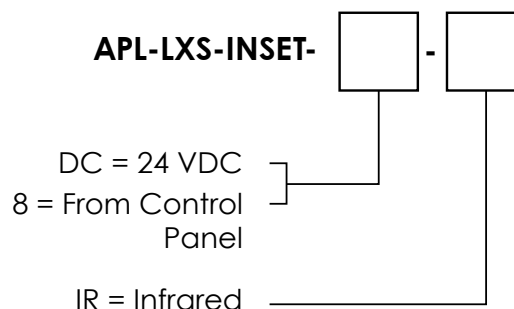


## TECHNICAL DRAWINGS

TOP VIEW

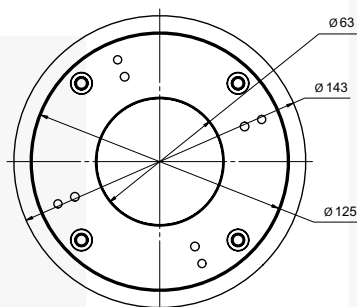

SIDE VIEW

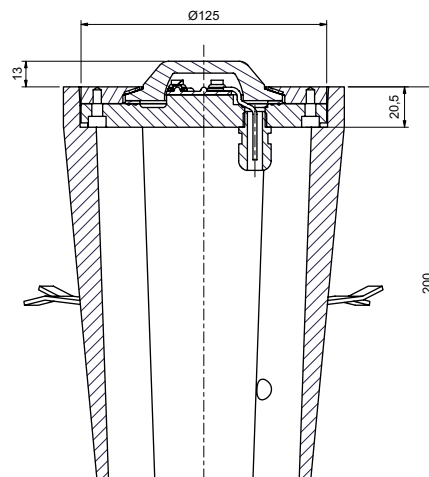

# HELIPORT LIGHTS


## FLIGHT PATH ALIGNMENT GUIDANCE LIGHT INSET FPAG-LXS-INSET



Where practicable, a flight path alignment guidance marking should be provided to indicate available approach and/or departure path directions.

- **Steady burning WHITE light**
- Long life time >10 years life expectancy
- Low consumption
- Stabilised light output
- Easy to install
- No RF-radiations
- Compact and light structure

**PATENTED**

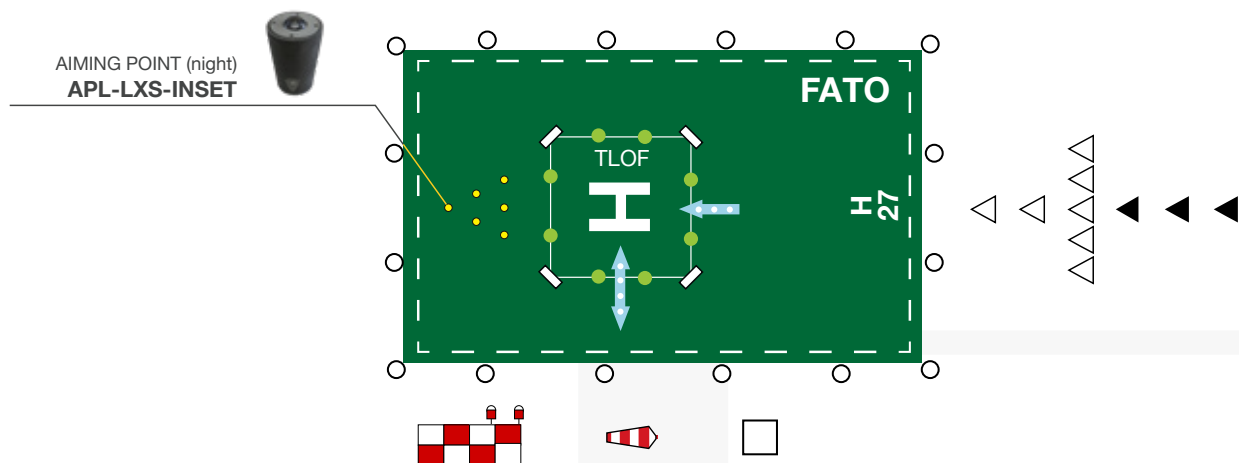

### CERTIFICATION



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## FLIGHT PATH ALIGNMENT GUIDANCE LIGHT INSET TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal emission: 360°
- PMMA and tempered glass lens

Elevation (E)	Luminous Intensity
$20^{\circ} < E \leq 90^{\circ}$	3 cd
$13^{\circ} < E \leq 20^{\circ}$	8 cd
$10^{\circ} < E \leq 13^{\circ}$	15 cd
$5^{\circ} < E \leq 10^{\circ}$	30 cd
$2^{\circ} \leq E \leq 5^{\circ}$	15 cd

-180° Azimuth +180°

### MECHANICAL FEATURES

- SS316 body
- NBR o-ring
- Tempered glass max load 5 ton.
- Degree of protection: IP68 (1,2mx45min)
- Shallow base dimension: 5"
- Operating temperature: -20°C to +60°C
- Lamp unit weight c/w shallow base 4,8kg

### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN

### ELECTRICAL FEATURES

- Power Supply:
  - 24 VDC stand-alone version
  - From control panel for light system
- Consumption: 3,7W @12/24Vdc
- Constant current driven LED
- Light intensity adjustment: 10% - 30% - 100%


### OPTIONS

- 8" / 12" shallow base adapter
- IR wavelength 850nm, compatible with NVG pilot


### CERTIFICATIONS

- ICAO/EASA test report (EN17025 laboratory) nr. 1407-QL22-R04
- CE marking


### ORDER CODE

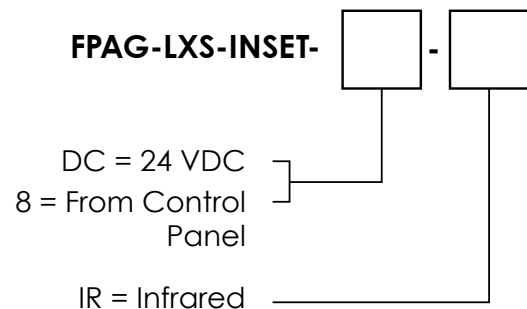

## TECHNICAL DRAWINGS

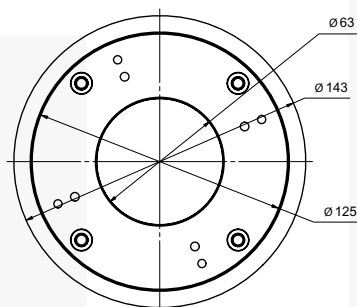


### SIDE VIEW

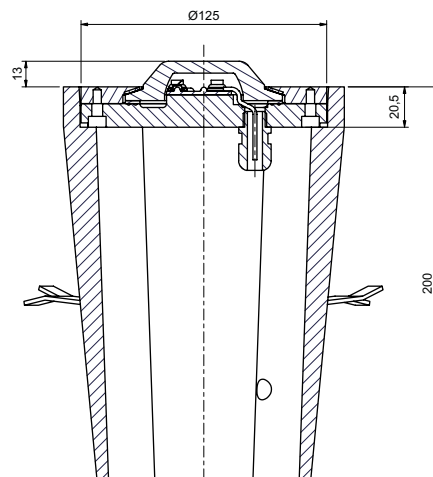

# HELIPORT LIGHTS

## TDPC LIGHTING- LIGHTING SECTIONS ASPSL-TDPC-LXS

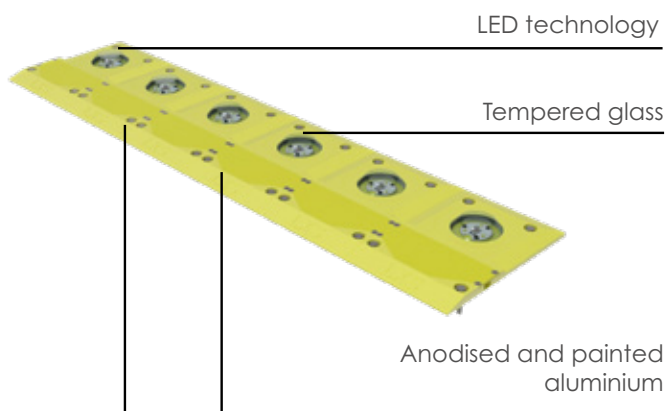


It marks the TDPC area circumference. The beacon is vehicle-accessible and suitable both for surface and elevated areas.

- Steady AMBER light
- Life time longer than 10 years
- Low consumption
- Stabilised light output
- Light-weight and compact body
- Easy to install
- No RF-radiations
- LED IR version available



## INSTALLATION MAPS

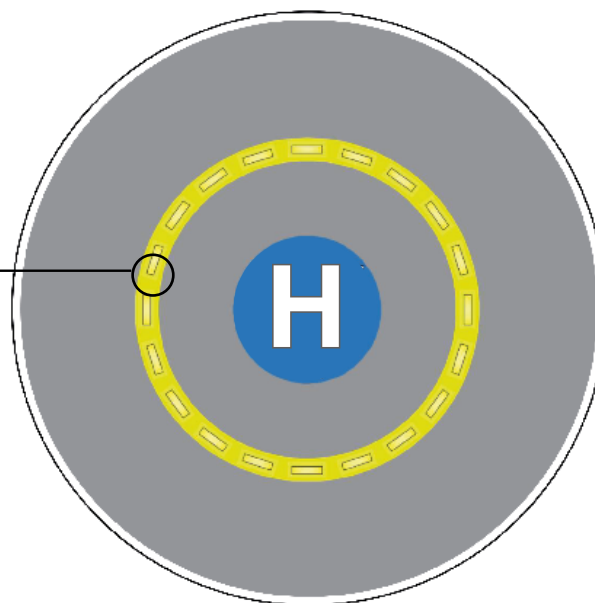

### CAPTION

#### ● ASPSL-LXS

Typical quantity of beacons to be installed is 16. For custom solutions (non-standard helipad dimensions) quantity of beacons shall be calculated.

### CERTIFICATION



### COMPLIANCE



### FEATURES








# HELIPORT LIGHTS

## PERIMETER LIGHT – TLOF FLAT TLOF-LXS-FLT

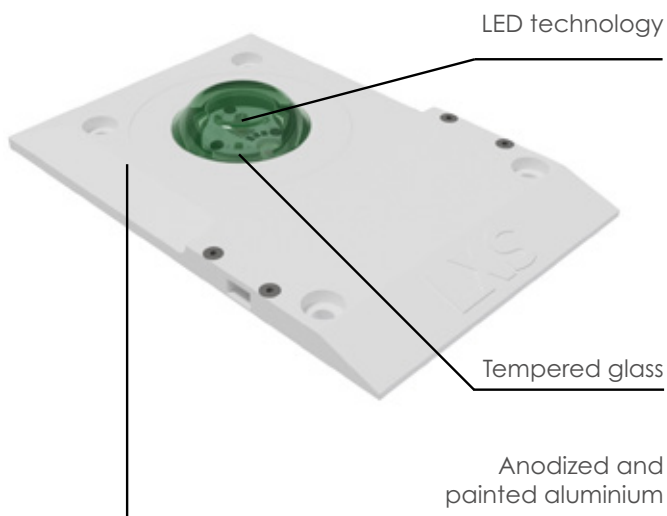



It marks perimetrically the TLOF area. The beacon is drive-over and no manhole on the surface is needed.

Suitable both for on and above ground platforms.

- Steady GREEN light
- Life time longer than 10 years
- Low consumption
- Stabilised light output
- Light-weight and compact body
- Easy to install
- No RF-radiations
- LED IR version available

**PATENTED**

## INSTALLATION MAPS

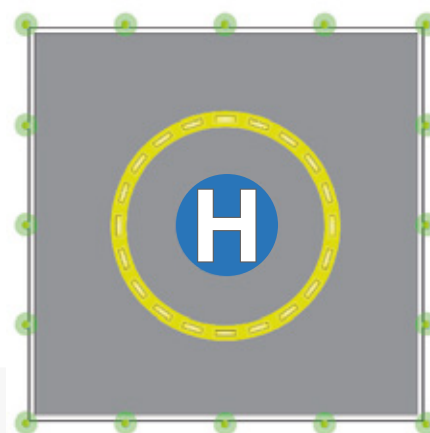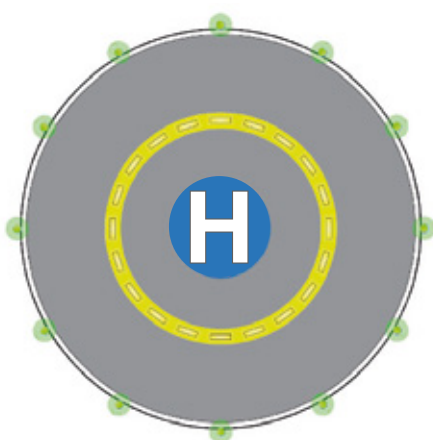

### CAPTION

#### ● TLOF-LXS-FLT

NOTE: The required-by-rules quantity of TLOF perimeter beacons is closely connected with the TLOF perimeter itself.

On above-ground platforms, the TLOF area mostly matches with the FATO area and that's the reason why the only TLOF perimeter beacons are required.

### CERTIFICATION



### COMPLIANCE



### FEATURES



# HELIPORT LIGHTS

## PERIMETER LIGHT - TLOF FLAT TECHNICAL SPECIFICATIONS

### OPTICAL FEATURES

- Horizontal beam radiation: 360°
- PMMA and tempered glass lens

ELEVATION	LUMINOUS INTENSITY [cd]
$20^{\circ} < E \leq 90^{\circ}$	3
$13^{\circ} < E \leq 20^{\circ}$	8
$10^{\circ} < E \leq 13^{\circ}$	15
$5^{\circ} < E \leq 10^{\circ}$	30
$2^{\circ} \leq E \leq 5^{\circ}$	15

-180° Azimuth +180°

### MECHANICAL FEATURES

- Anodised and painted aluminium body
- EPDM o-ring
- Degree of protection: IP68
- Operating temperature: -20°C to +50°C
- Provided with Luxsolar standard cable 30cm
- Elevation: <25mm
- Tempered glass resistant up to 5000kg load

### ELECTRICAL FEATURES

- Powered by LXS control panel:
  - 12/24 or 48 VDC or 115/230 VAC incoming power
  - 24 VDC outgoing power to the beacons
- Power consumption: 3,7W @12/24 VDC
- LED feeded at constant current
- Adjustable light intensity: 10% - 30% - 100%

### OPTIONS

- IR Wavelength: 850nm, compatible with pilot's NVG

### COMPLIANCE

- ICAO/EASA test report (EN17025 laboratory) nr. 1407-QL22-R01
- CE


### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN
- EASA PTS-VPT-DSN

### ORDER CODE


**TLOF-LXS-FLT**

## TECHNICAL DRAWINGS

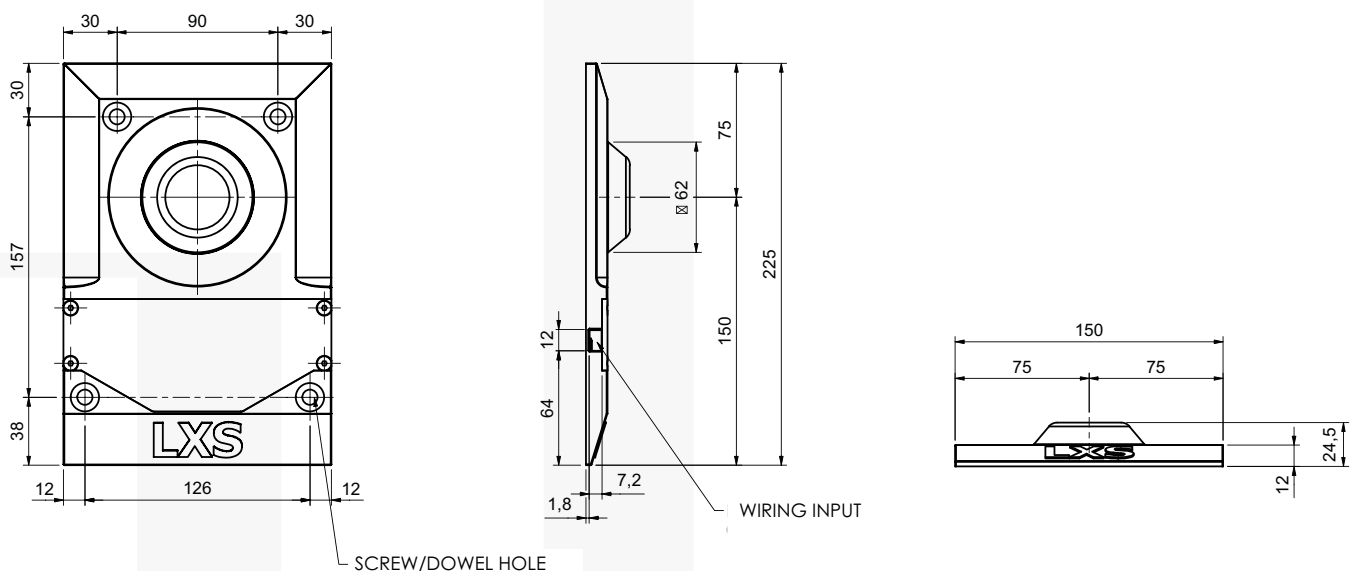

# HELIPORT LIGHTS

## PERIMETER LIGHT - FATO FLAT FATO-LXS-FLT

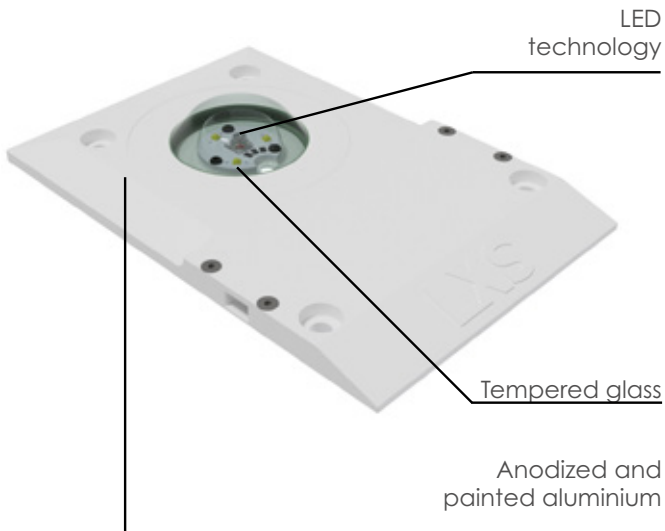


It marks perimetrically the FATO area. The beacon is drive-over and no manhole on the surface is needed.

Suitable both for on and above ground platforms.

- Steady WHITE light
- Life time longer than 10 years
- Low consumption
- Stabilised light output
- Light-weight and compact body
- Easy to install
- No RF-radiations
- LED IR version available

**PATENTED**

## INSTALLATION MAPS

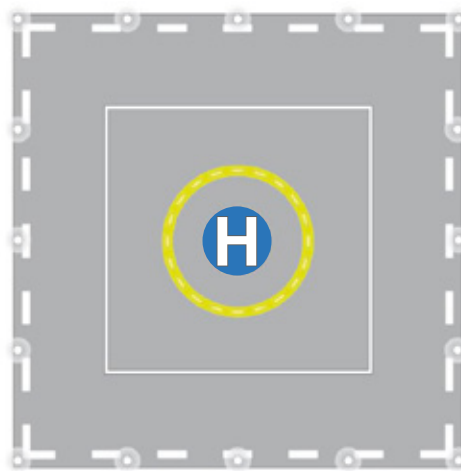

**CAPTION**

### ○ FATO-LXS-FLT

*NOTE: The required-by-rules quantity of FATO perimeter beacons is closely connected with the FATO perimeter itself.*

*On above-ground platforms, the TLOF area mostly matches with the FATO area and that's the reason why the only TLOF perimeter beacons are required.*

### CERTIFICATION



### COMPLIANCE



### FEATURES



# HELIPORT LIGHTS

## PERIMETER LIGHT - FATO FLAT TECHNICAL SPECIFICATIONS

### OPTICAL FEATURES

- Horizontal beam radiation: 360°
- PMMA and tempered glass lens

ELEVATION	LUMINOUS INTENSITY [cd]
30°	10
25°	50
20°	100
10°	100
3°	100
0°	10

-180°                      Azimuth                      +180°

### MECHANICAL FEATURES

- Anodised and painted aluminium body
- EPDM o-ring
- Degree of protection: IP68
- Operating temperature: -20°C to +50°C
- Provided with Luxsolar standard cable 30cm
- Elevation: <25mm
- Tempered glass resistant up to 5000kg load

### ELECTRICAL FEATURES

- Powered by LXS control panel:
  - 12/24 or 48 VDC or 115/230 VAC incoming power
  - 24 VDC outgoing power to the beacons
- Power consumption: 3,7W @12/24 VDC
- LED feeded at constant current
- Adjustable light intensity: 10% - 30% - 100%

### OPTIONS

- IR Wavelength: 850nm, compatible with pilot's NVG

### COMPLIANCE

- ICAO/EASA test report (EN17025 laboratory) nr. 1407-QL22-R04
- CE


### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN
- EASA PTS-VPT-DSN

### ORDER CODE


**FATO-LXS-FLT**

## TECHNICAL DRAWINGS

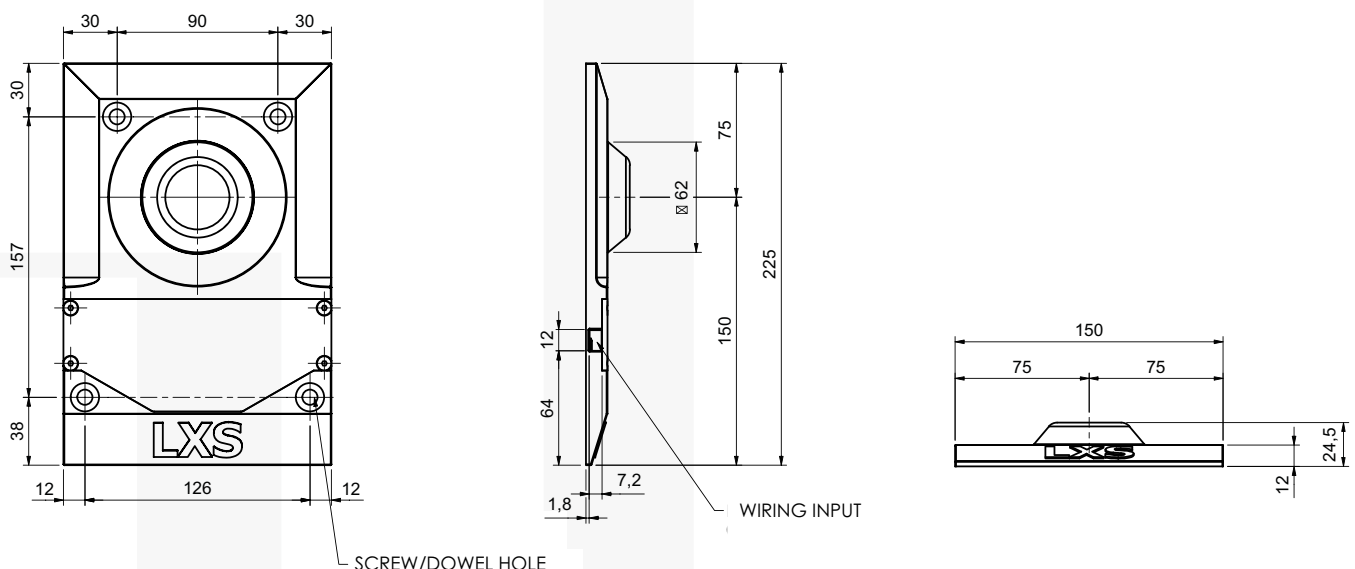

# HELIPORT LIGHTS

## H MARKING LIGHTING - LIGHTING SECTIONS CRH-LXS

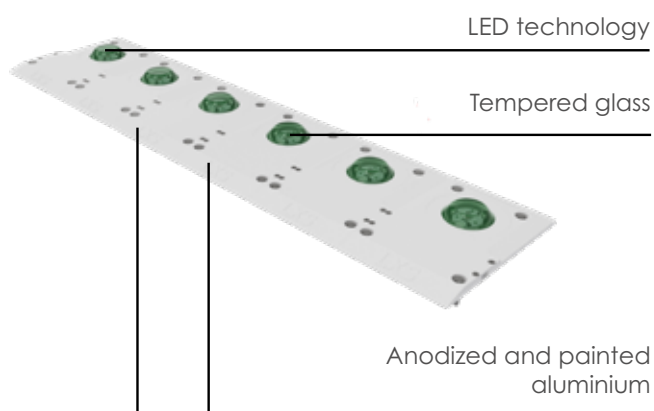


The H Marking Lighting marks the perimeter of the H symbol that is central in the TDPC area. The beacon is vehicle-accessible and suitable both for surface and elevated areas.

- Steady GREEN light
- Life time longer than 10 years
- Low consumption
- Stabilised light output
- Light-weight and compact structure
- Easy to install
- No RF-radiations
- IR version available

**PATENTED**

## INSTALLATION MAPS

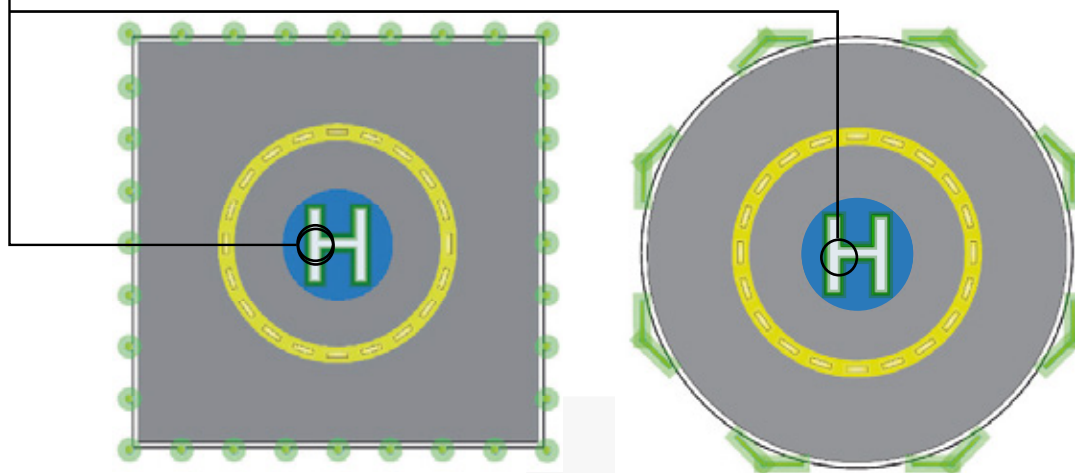

### CAPTION

#### ○ CRH-LXS

The quantity of the required-by-regulation beacons is closely connected with the to-be-illuminated symbol dimensions.

### CERTIFICATION



### COMPLIANCE



### FEATURES



# HELIPORT LIGHTS

## H MARKING LIGHTING - LIGHTING SECTIONS TECHNICAL SPECIFICATIONS

### OPTICAL FEATURES

- Horizontal beam radiation: 360°
- PMMA and tempered glass lens

ELEVATION	LUMINOUS INTENSITY [cd]	
	Min	Max
2° to 12°	3.5	60
> 12° to 20°	0.5	30
> 20° to 90°	0.2	10

-180° Azimuth +180°

### MECHANICAL FEATURES

- Anodised and painted aluminium body
- EPDM o-ring
- Degree of protection: IP68
- Operating temperature: -20°C to +50°C
- Provided with Luxsolar standard cable 30cm
- Elevation: <25mm
- Tempered glass resistant up to 5000kg load

### ELECTRICAL FEATURES

- Powered by LXS control panel:
  - 12/24 or 48 VDC or 115/230 VAC incoming power
  - 24 VDC outgoing power to the beacons
- Power consumption: 2W @24 VDC each element
- Adjustable light intensity: 10% - 30% - 100%
- Failures monitoring

### OPTIONS

- IR Wavelength: 850nm, compatible with pilot's NVG
- Available in 1,2,4,5 modules configuration

### CERTIFICATIONS

- CE

### COMPLIANCE

- ICAO Aerodromes - Annex 14 Volume 2, Heliports
- EASA CS-HPT-DSN
- EASA PTS-VPT-DSN
- CAA CAP1264


### ORDER CODE

**CRH-LXS-6\***

**CRH-LXS-3\***


\* The last code number refers to the possible modules quantity configurations

## TECHNICAL DRAWINGS

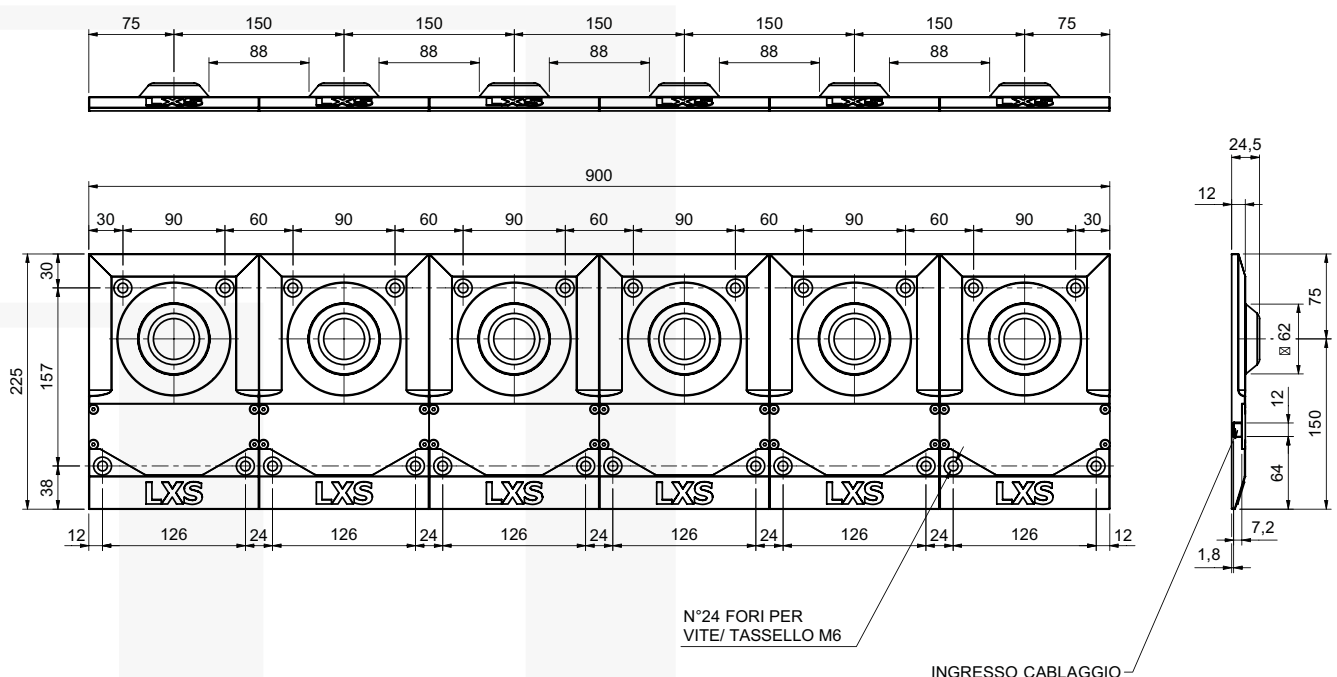

# HELIPORT LIGHTS

## CROSS CHEVRON LIGHTING - LIGHTING SECTIONS CCH-LXS

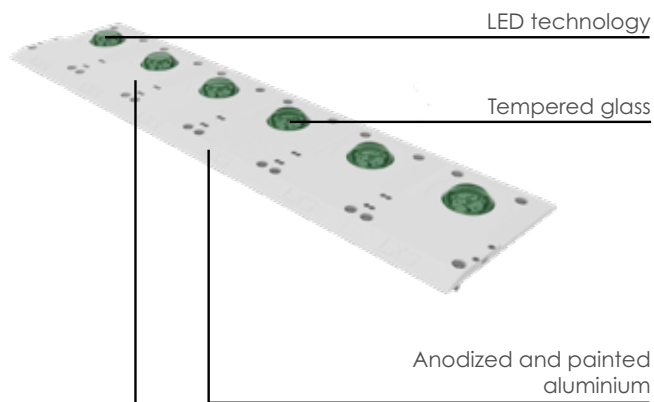


The Cross Chevron Lighting marks the perimeter of the Cross symbol that is central in the TDPC area. The beacon is vehicle-accessible and suitable both for surface and elevated areas.

- Steady GREEN light
- Life time longer than 10 years
- Low consumption
- Stabilised light output
- Light-weight and compact structure
- Easy to install
- No RF-radiations
- IR version available

**PATENTED**

## INSTALLATION MAPS

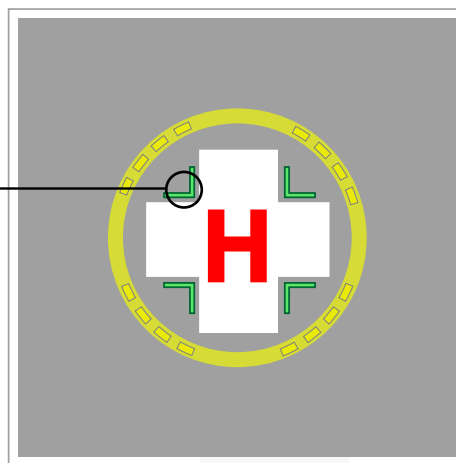

**CAPTION**

○ **CCH-LXS**

Quantity of beacons is required by regulation.

### CERTIFICATION



### COMPLIANCE



### FEATURES








# HELIPORT LIGHTS

## HELIPORT BEACON - HB HB-LXS

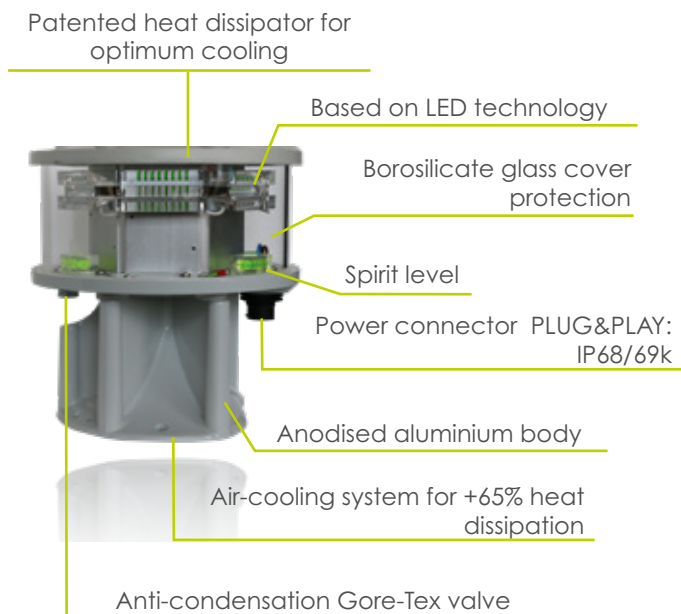


- Long life time >10 years life expectancy
- Morse code "H" White light
- Low consumption
- Stabilised light output
- Lightweight and compact
- Low wind load factor
- Easy to install
- Light output alignment device
- Adjustable intensity OFF -3%, -10%, -100% through external digital switch
- Electronic beacon driver in a separate enclosure

**PATENTED**

### CERTIFICATION



### FEATURES

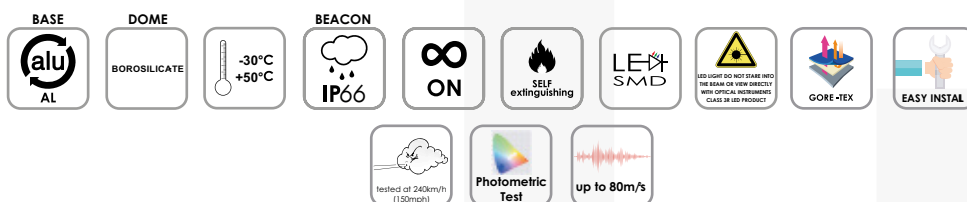

### TYPICAL APPLICATION



# HELIPORT LIGHTS

## HELIPORT BEACON - HB TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Based on LED technology
- Horizontal beam radiation 360°
- PMMA lens
- Vertical beam spread

Elevation (E)	Luminous Intensity
10°	250cd
7°	750cd
4°	1700cd
2° ½	2500cd
1° ½	2500cd
0°	1700cd

-180° Azimuth +180°

### LIGHT MECHANICAL FEATURES

- Anodised aluminium body, painted RAL7035
- Borosilicate glass cover protection
- Silicon rubber, VMQ
- Degree of protection: IP66 (Beacon)
- Operating temperature -30°C to +50°C

### CONTROLLER MECHANICAL FEATURES

- Enclosure material: mild steel, painted RAL 7035
- Degree of protection: IP65
- Dimension: 500x300x210mm
- Weight: 20kg
- Operating temperature: -20°C to +50°C

### ELECTRICAL FEATURES

- Power supply by LUXSOLAR controller:
  - 12/24 VDC;
  - 115/230 VAC
- Average power consumption 13W
- LED feeded at constant current
- No RF-radiations

### CERTIFICATIONS

- ICAO/EASA test report (EN17025 laboratory) nr. 523-QL17-R02
- CE marking

### COMPLIANCE

- ICAO Heliports - Annex 14 Vol. II
- ICAO Heliport Manual

### ORDER CODE


**HB-LXS-IP24**  
**HB-LXS-IP230**

# HELIPORT LIGHTS


## HELIPORT BEACON - HB TECHNICAL SPECIFICATION AND DRAWING

### BEACON

#### FRONT VIEW

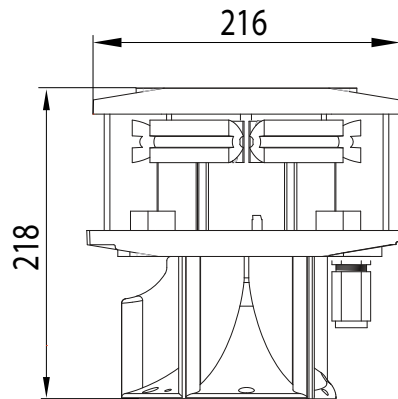


#### TOP VIEW

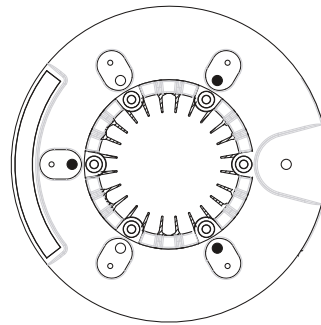


### CONTROLLER

#### FRONT VIEW

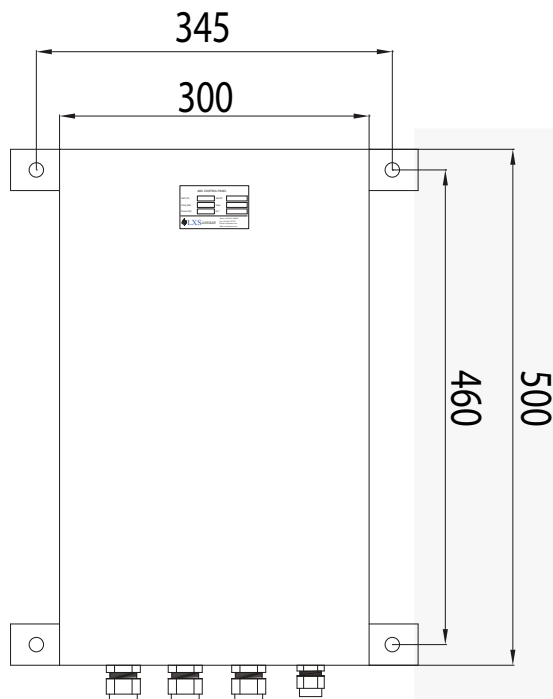


#### TOP VIEW

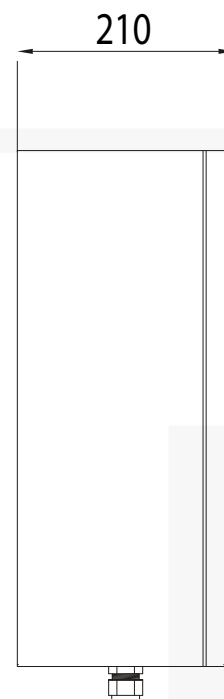


# HELIPORT LIGHTS

## HELIPORT BEACON - HB TECHNICAL SPECIFICATION AND DRAWING

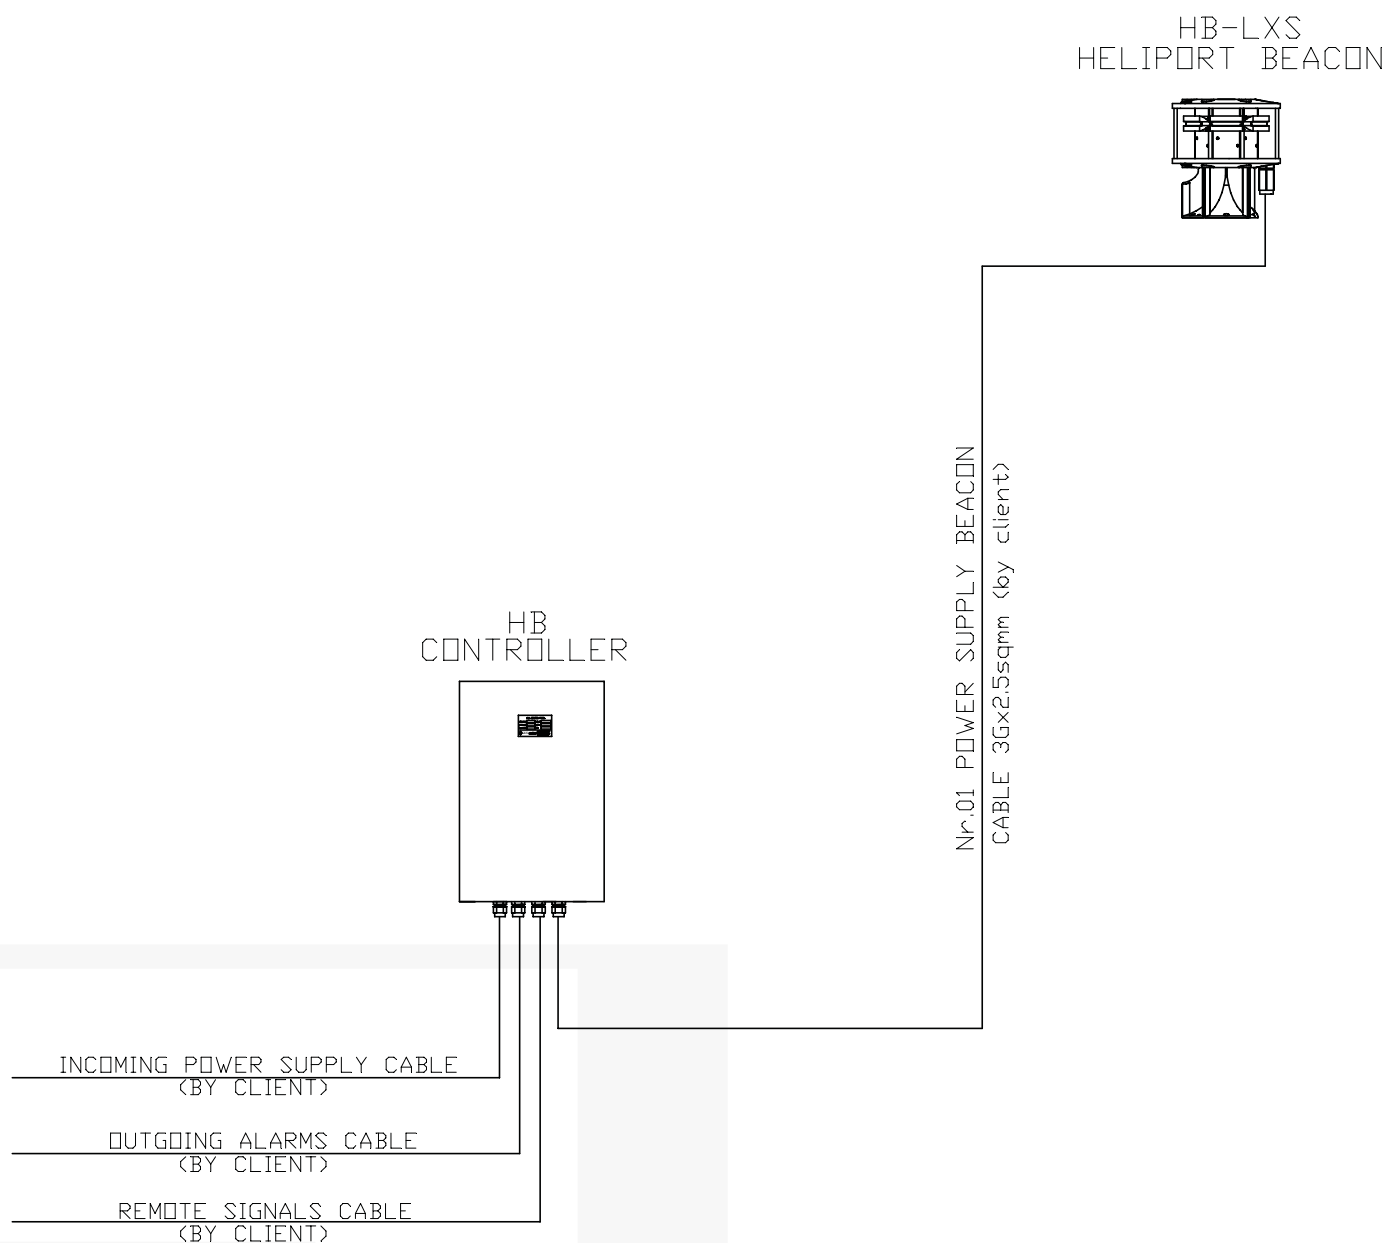

# HELIPORT LIGHTS

## APPROACH LIGHT - FLASHING LIGHT HAL-LXS-FL

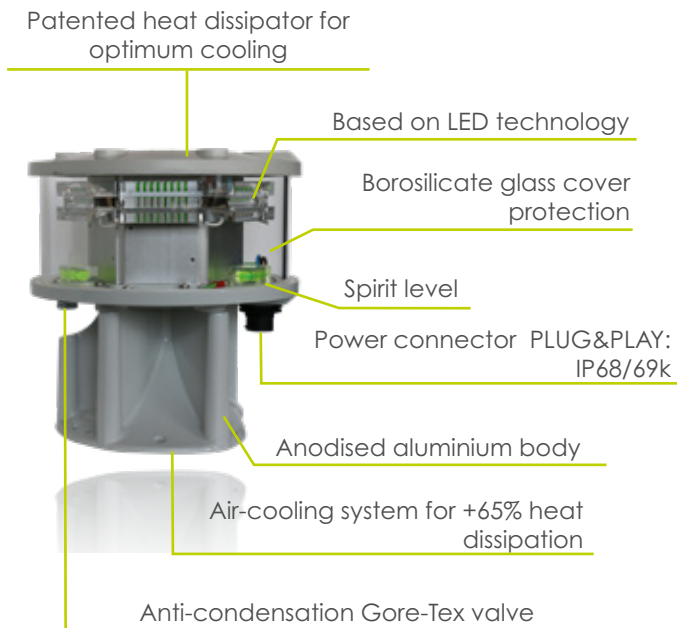

- Long life time **>10 years life** expectancy
- **Flashing WHITE** light
- **Low** consumption
- **Stabilised light** output
- **Lightweight** and **compact**
- **Low** wind load factor
- **Easy** to install
- Light output **alignment device**
- **Adjustable intensity 3%, 10%, 100%** through external digital switch for flashing light
- **Flash sequence starting from the outermost light and progress towards the crossbar**

**PATENTED**


### CERTIFICATION



### COMPLIANCE



### FEATURES

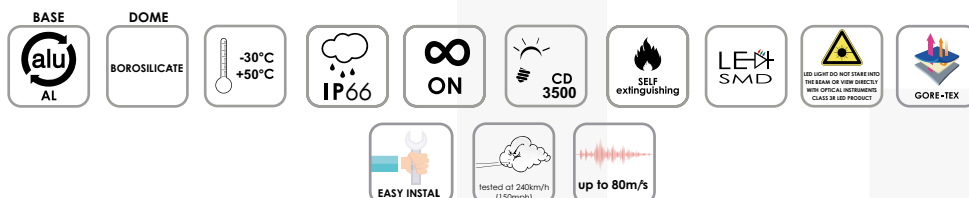

### TYPICAL APPLICATION



# HELIPORT LIGHTS

## APPROACH LIGHT - FLASHING LIGHT TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Based on LED technology
- Horizontal beam radiation 360°
- PMMA lens
- Vertical beam spread

Elevation (E)	Luminous Intensity
15°	250cd
9°	2500cd
6°	3500cd
5°	3500cd
2°	2500cd
0°	250cd

-180° Azimuth +180°

### LIGHT MECHANICAL FEATURES

- Anodised aluminium body, painted RAL7035
- Borosilicate glass cover protection
- Silicon rubber, VMQ
- Degree of protection: IP66
- Operating temperature -30°C to +50°C
- Weight: 6kg

### CONTROLLER MECHANICAL FEATURES

- Enclosure material: mild steel, painted RAL 7035
- Degree of protection: IP65
- Dimension: 500x300x210mm
- Weight: 20kg
- Operating temperature: -20°C to +50°C

### ELECTRICAL FEATURES

- Power supply by LUXSOLAR remote controller:
  - 12/24 VDC;
  - 115/230 VAC
- Average power consumption 13W
- LED feeded at constant current
- No RF-radiations

### CERTIFICATIONS

- CE marking

### COMPLIANCE

- ICAO Heliports - Annex 14 Vol. II
- ICAO Heliport Manual

### ORDER CODE


**HAL-LXS-FL**

# HELIPORT LIGHTS


## APPROACH LIGHT - FLASHING LIGHT TECHNICAL SPECIFICATION AND DRAWING

### BEACON


SIDE VIEW

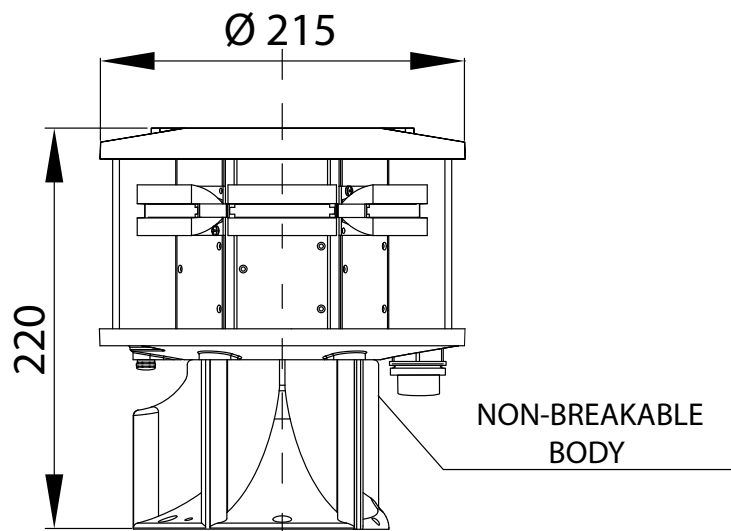

TOP VIEW

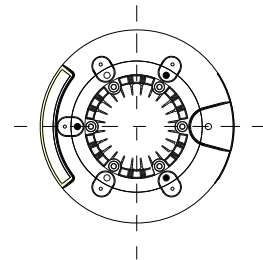

BOTTOM VIEW

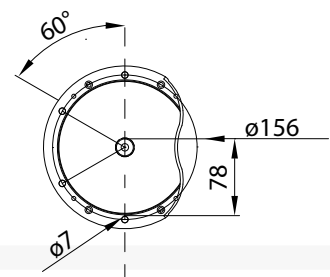




# HELIPORT LIGHTS


## APPROACH LIGHT - FLASHING LIGHT TECHNICAL SPECIFICATION AND DRAWING

### CONTROLLER

#### FRONT VIEW

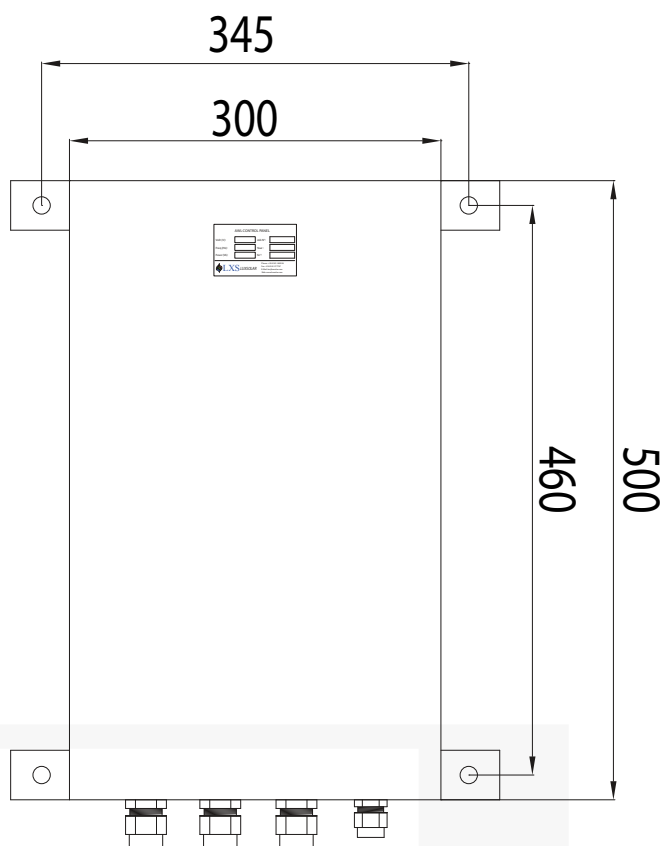


#### TOP VIEW

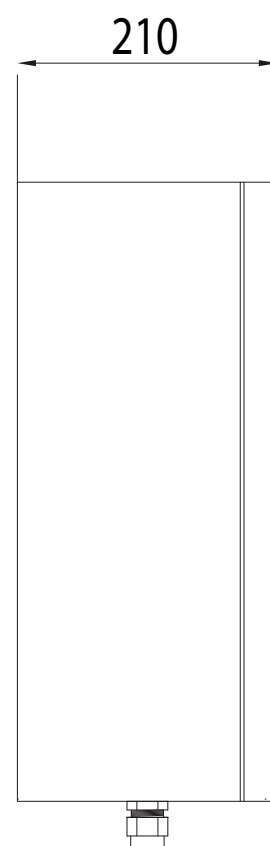

# HELIPORT LIGHTS

## APPROACH LIGHT - STEADY BURNING HAL-LXS-SB

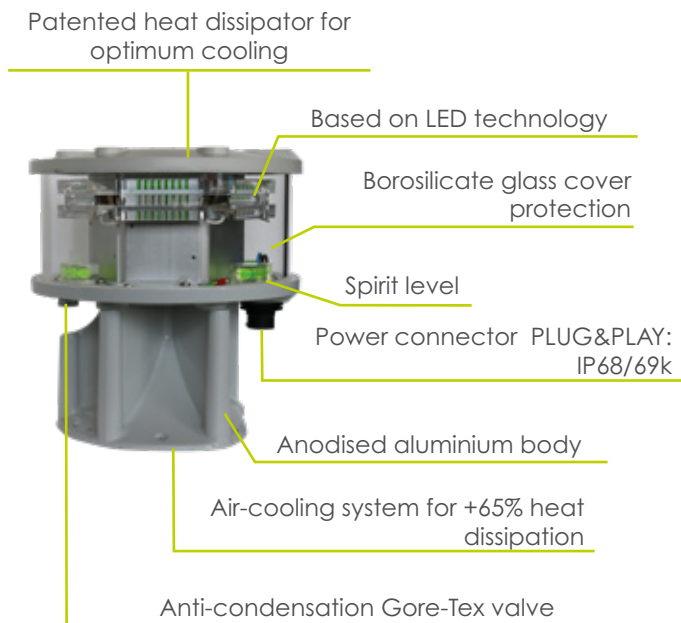

- Long life time **>10 years life** expectancy
- **WHITE steady burning light**
- **Low** consumption
- **Stabilised light** output
- **Lightweight** and **compact**
- **Low** wind load factor
- **Easy** to install
- Light output **alignment device**
- **Adjustable intensity 10%, 30%, 100%** through external digital switch

**PATENTED**

### CERTIFICATION




### COMPLIANCE

ICAO

EASA

### FEATURES

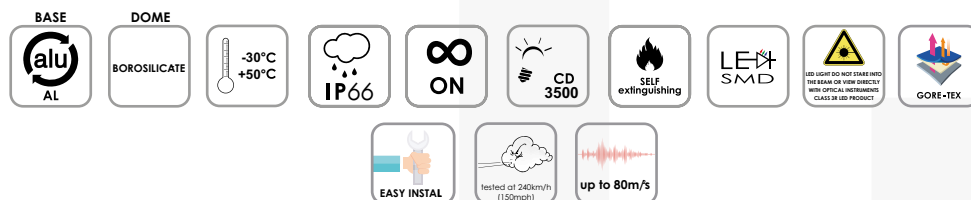

### TYPICAL APPLICATION



# HELIPORT LIGHTS

## APPROACH LIGHT - STEADY BURNING TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Based on LED technology
- Horizontal beam radiation 360°
- PMMA lens
- Vertical beam spread

Elevation (E)	Luminous Intensity
15°	25 cd
9°	250 cd
6°	350 cd
5°	350 cd
2°	250 cd
0°	25 cd

-180°                      Azimuth                      +180°

### LIGHT MECHANICAL FEATURES

- Anodised aluminium body, painted RAL7035
- Borosilicate glass cover protection
- Silicon rubber, VMQ
- Degree of protection: IP66
- Operating temperature -30°C to +50°C
- Weight: 6kg

### CONTROLLER MECHANICAL FEATURES

- Enclosure material: mild steel, painted RAL 7035
- Degree of protection: IP65
- Dimension: 500x300x210mm
- Weight: 20kg
- Operating temperature: -20°C to +50°C

### ELECTRICAL FEATURES

- Power supply by remote controller:
  - 12/24 VDC;
  - 115/230 VAC
- Average power consumption 13W
- LED feeded at constant current
- No RF-radiations

### CERTIFICATIONS

- CE marking

### COMPLIANCE

- ICAO Heliports - Annex 14, Vol. II
- ICAO Heliport Manual - DOC.9261
- EASA CS-HPT-DSN, Heliports Design

### ORDER CODE


**HAL-LXS-SB**

# HELIPORT LIGHTS


## APPROACH LIGHT - STEADY BURNING TECHNICAL SPECIFICATION AND DRAWING

### BEACON


SIDE VIEW

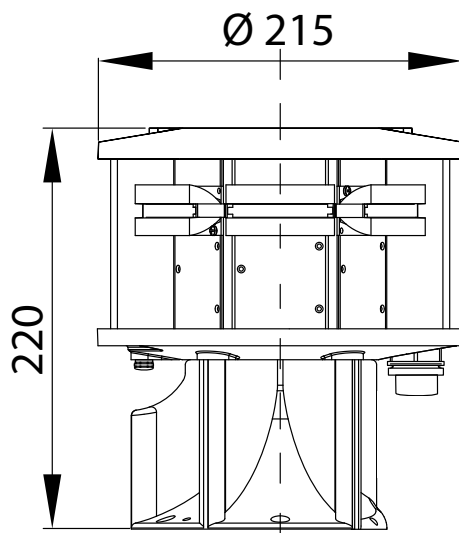

TOP VIEW

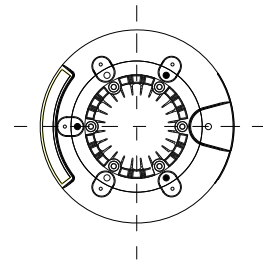

BOTTOM VIEW

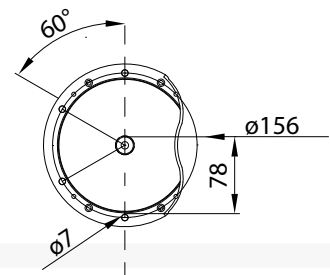


# HELIPORT LIGHTS


## APPROACH LIGHT - STEADY BURNING TECHNICAL SPECIFICATION AND DRAWING

### CONTROLLER

#### FRONT VIEW

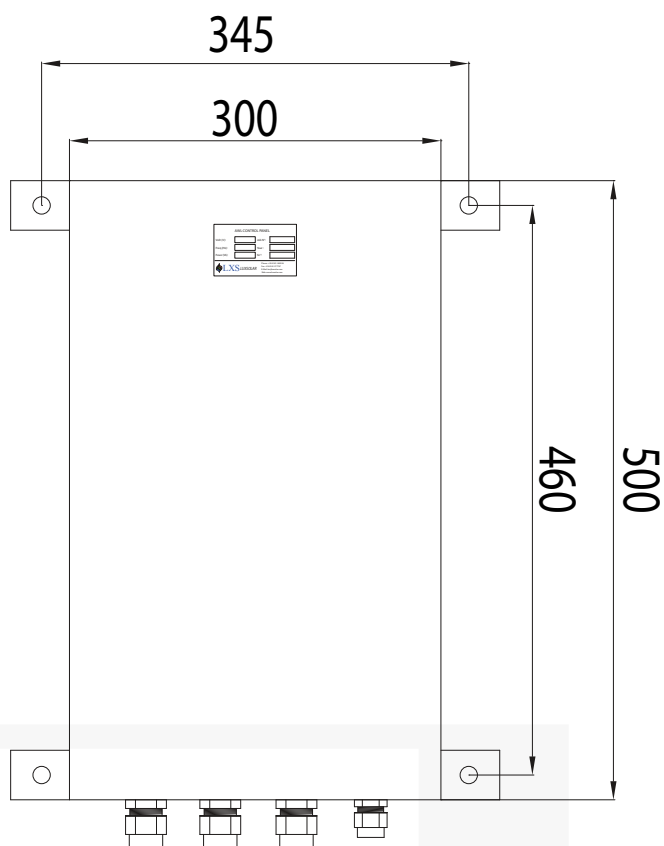


#### TOP VIEW

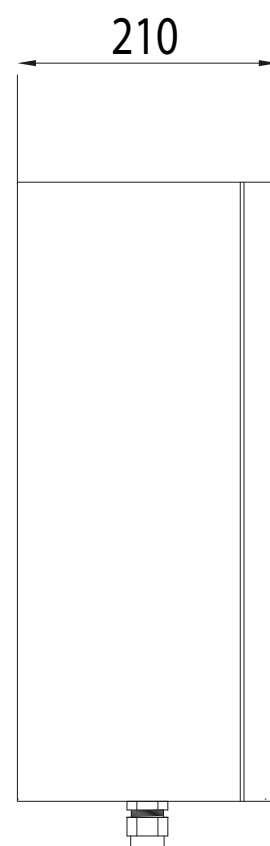

# HELIPORT LIGHTS

## HELIHOIST STATUS LIGHT HSL-LXS-CAP437-IP

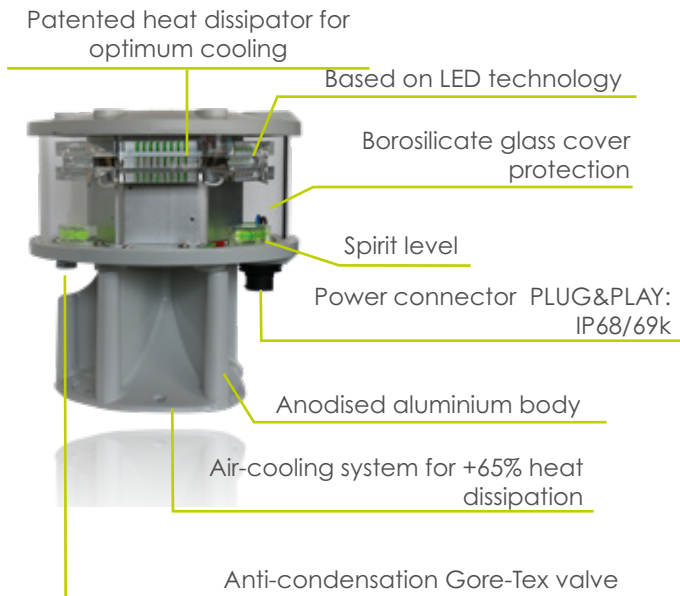

- Light emission:
  - **Green Steady:** wind turbine is secure for operation;
  - **Green Flashing (120fpm):** wind turbine is in preparation to accept hoist operation or during operation parameters are moving out of limits;
  - **Light Off:** wind turbine is not safe for conducting operations;
- Long life time >10 years life expectancy
- Low consumption
- Stabilised light output
- Low wind load factor
- Easy to install
- Light output alignment device

**PATENTED**



### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## HELIHOIST STATUS LIGHT TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal beam radiation 360°
- PMMA lens
- Vertical beam radiation:

	Min. Intensity		Max. Intensity	
	2° to 10°	>10° to 90°	0° to 15°	>15° to 90°
Day	410cd	16cd	750cd	120cd
Night	16cd	3cd	60cd	60cd

### LIGHT MECHANICAL FEATURES

- Anodised aluminium body, painted RAL7035
- Borosilicate glass cover protection
- Silicon rubber, VMQ
- Degree of protection: IP66 (Beacon)
- Operating temperature -30°C to +50°C

### CONTROLLER MECHANICAL FEATURES

- Enclosure material: mild steel, painted RAL 7035
- Degree of protection: IP65
- Dimension: 500x300x210mm
- Weight: 20kg
- Operating temperature: -20°C to +50°C

### APPLY TO

- Offshore heliport platforms, located on the nacelle and used to indicate to pilot the status (safe or unsafe) of the wind turbine before commencing of any hoist operation

### CERTIFICATIONS

- CE marking

### COMPLIANCE

- CAP437 "Standard for offshore Helicopter donating Areas" Ch. 10 and Appendix J
- CAP437 "Policy and guidelines on wind turbines", Ch. 4

### ORDER CODE


**HSL-LXS-CAP437-IP**

# HELIPORT LIGHTS


## HELIHOIST STATUS LIGHT TECHNICAL SPECIFICATION AND DRAWING

BEACON

FRONT VIEW

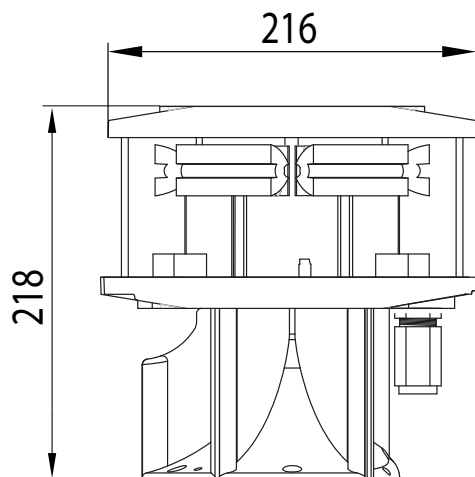

TOP VIEW

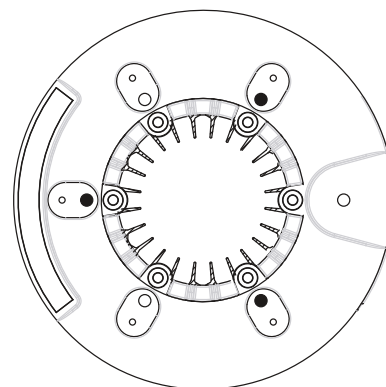




# HELIPORT LIGHTS


## HELIHOIST STATUS LIGHT TECHNICAL SPECIFICATION AND DRAWING

### CONTROLLER

#### FRONT VIEW

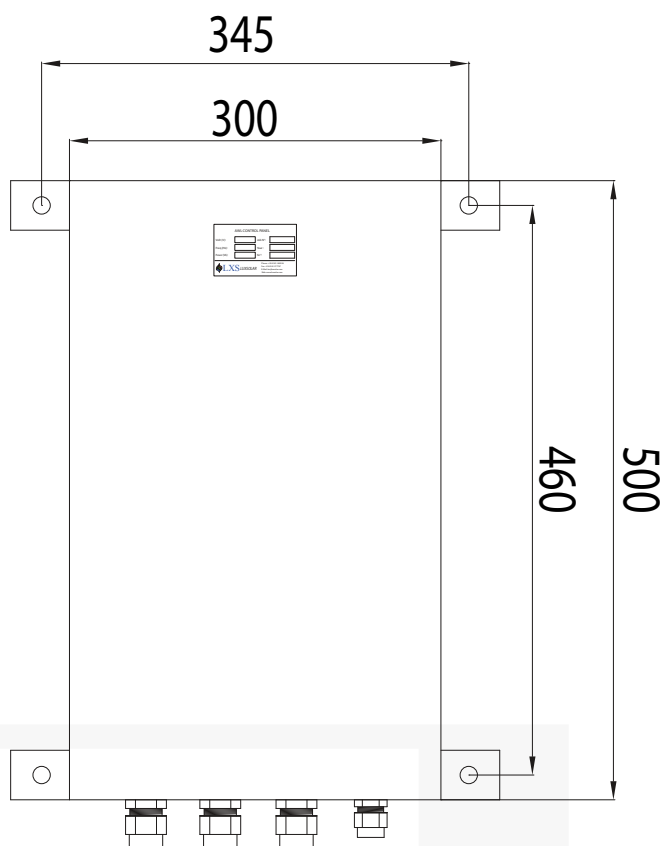

#### TOP VIEW

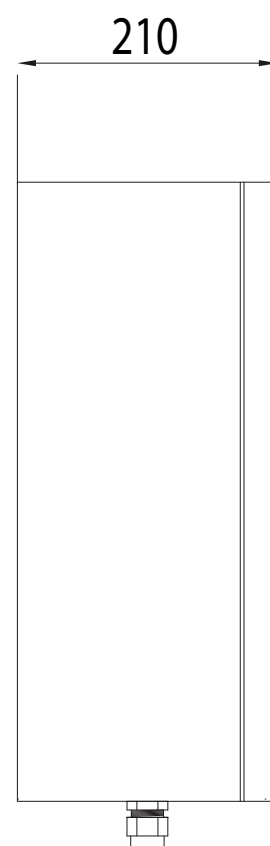

# HELIPORT LIGHTS

## LXS HELIPORT LIGHTED WINDSOCK

UV resistant tested fabric sock

Led obstruction light

CET System technology available

Structure:

- Frangible
- Collapsible
- Fixed

LED Internal Lighting

The internal lights of the sock and the obstruction light are powered by the innovative CET (Contactless Energy Transmission) system, for the wireless transfer of energy from the fixed to the mobile rotating part of the sock.

- Contactless power supply available
- Internal and external lighting compliant to regulations



## TECHNICAL SPECIFICATIONS

### SOCK FEATURES

- Colour:
  - Unicolour Red
  - Unicolour Orange
  - Unicolour White
  - Two-tone Red and White
- Material: Polyester or Nylon
- Throat opening: from  $\varnothing 250\text{mm}$  to  $\varnothing 900\text{mm}$
- Length: according to throat diameter
  - Designed to be visible up to 200m distance
  - 360° complete rotation

### MECHANICAL FEATURES

- Pole material:
  - Aluminium
  - Glass Reinforced Polyester (GRP)
  - Stainless Steel
- Windsock height: from 2m to 6m
- Pole structure type:
  - Fixed
  - Frangible
  - Collapsible
  - Frangible + Collapsible
- Sock frame material: Stainless Steel
- Degree of protection: IP66

### ELECTRICAL FEATURES

- Power supply: 24VDC or 230 Vac
- Power consumption: 20W
- LED feeded at constant current
- CET (Contactless Energy Transmission) available

### OBSTRUCTION LIGHT OPTICAL FEATURES

- Horizontal emission: 360°
- Vertical emission: as per ICAO rule L810 Type A or Type B

### WINDSOCK OPTIONS

- Pole painting
- Power supply 110/220 Vac
- IR light compatible with NVG
- Lower temperature compatibility (-50°C)

### TEMPERATURE

- Operating temperature: -20°C to +50°C

### COMPLIANCE

- ICAO Annex 14 Vol. II Heliports - par. 5.1.1
- ICAO Annex 14 Vol. I Visual Aids - par. 5.1.1
- FAA AC 150 / 5345 - 27
- EASA Chapter F - Heliport Windsock Visual Aids
- PTS - VPT - DSN EASA

# HELIPORT LIGHTS

## LXS HELIPORT LIGHTED WINDSOCK PRODUCT CONFIGURATION

PRODUCT CODE	SOCK DIMENSION	SOCK MATERIAL	SOCK COLOUR	LIGHTING	STRUCTURE TYPE	POLE MATERIAL	POLE PAINTING	WINDSOCK HEIGHT
MAV								

**SOCK DIMENSIONS**

- 0 = Custom
- 2 = Ø 250mm (l =1,2m)
- 3 = Ø 300mm (l =1,2m)
- 4 = Ø 450mm (l =2,5m)
- 6 = Ø 600mm (l =2,4m)
- 9 = Ø 900mm (l =3,75m)

**SOCK MATERIAL**

- N = Nylon
- P = Polyester

**SOCK COLOUR**

- 0 = Custom
- S = Red
- T = Red/White
- U = White
- W = Orange

**LIGHT**

- 0 = Custom
- 1 = Obstacle Light
- 2 = Internal Light
- 3 = Internal + Obstacle Lights

**STRUCTURE TYPE**

- 0 = Not provided
- 1 = Fixed
- 2 = Frangible
- 3 = Collapsible
- 4 = Frangible & Collapsible

**POLE MATERIAL**

- A = Steel
- G = GRP
- S = Stainless Steel

**POLE PAINTING\***

- Y = Yes
- N = No

**WINDSOCK HEIGHT (L)\*\***

- 25 = 2,5m
- 30 = 3m
- 35 = 3,5m
- XY = Custom


\*Painted with red/white alternate bands

\*\* To wind sock centerline

# HELIPORT LIGHTS

## LXS HELIPORT LIGHTED WINDSOCK STRUCTURE TYPE

### GRP

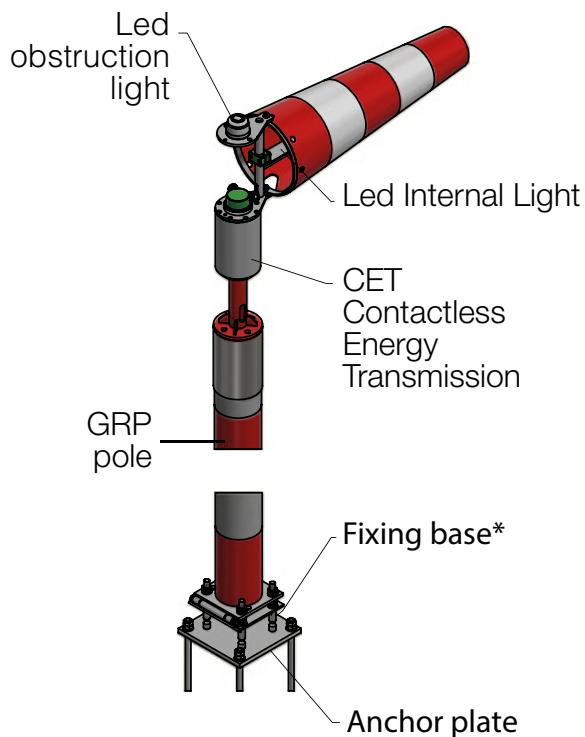

#### 1) Frangible\*

Frangibility, in case of impact, 4 specially design frangible bolts will bring the entire structure down to the ground.



#### 2) Collapsible\*


The structure can be can be overturned at ground level by means of a hinge for maintenance and checks.



#### 3) Frangible + Collapsible\*

Commbination of hinge and frangible bolts improves the global safety of the system.

### STEEL

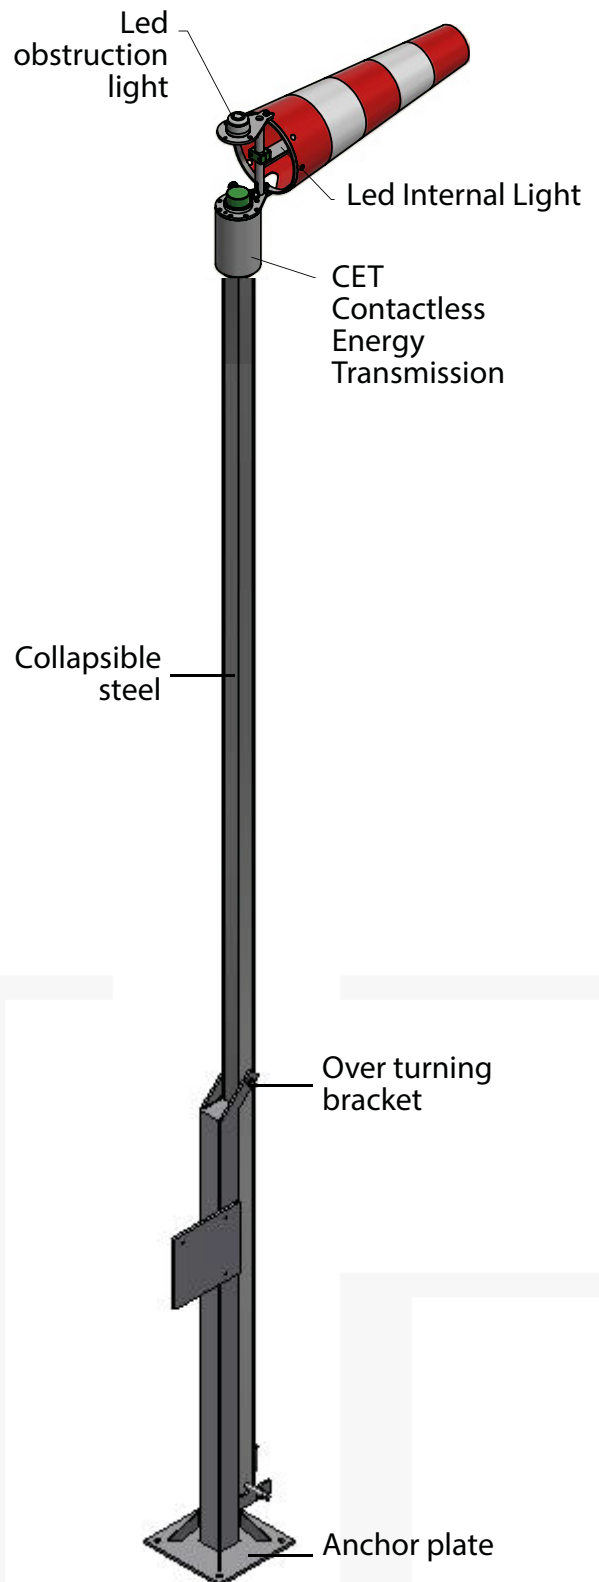

# HELIPORT LIGHTS

## LXS HELIPORT LIGHTED WINDSOCK LIGHTING COMPARISON



### Style I-A



#### **Externally lighted:**

External Lighting with projectors placed over the windsock, in a way that the sock is lighted in all positions.

This solution needs a lot of power.



### Style I-B



#### **Internally lighted:**

1) Internal lighting by reflectors chasing the windsock.

The reflector reduces the wind flow, necessary to inflate the sock. The problem is significant in medium and bigger sized windsocks.

Luxsolar® solution.



### Style I-C




#### **Internally lighted:**

2) This solution has the advantage to illuminate only the sock from the inside, avoiding unnecessary energy consumption. The lamp illuminates the sock from the inside. The power is transferred from the fixed part to the mobile basket through an innovative Contactless Energy Transmission - CET.

Luxsolar® solution.

# HELIPORT LIGHTS


## HELIPORT FLOODLIGHT HFL-LXS-10K

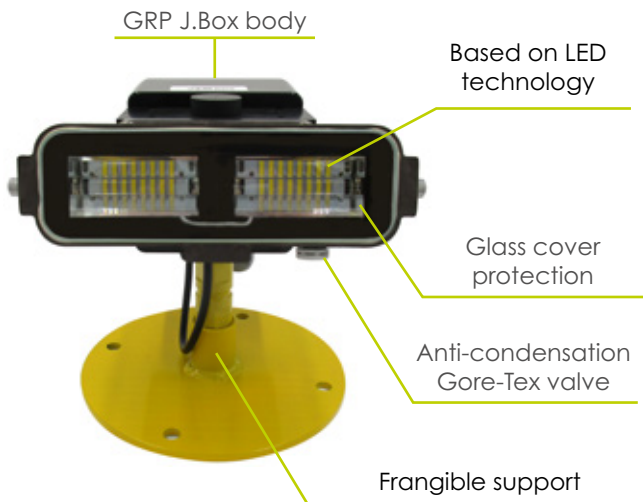

- Long life time **>10 years life** expectancy
- **10.000cd, WHITE** steady burning
- Light emission **angle adjustable**
- **Easy** to install



HELIPORT FLOODLIGHT (night)  
**HFL-LXS-10K**

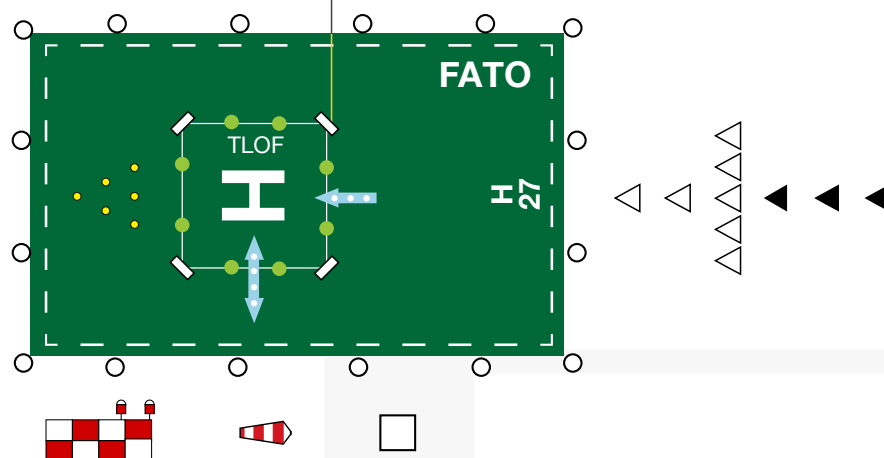

### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## HELIPORT FLOODLIGHT TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal light emission: 60°
- Vertical light emission: as per ICAO rule

### MECHANICAL FEATURES

- Aluminium body c/w frangible support
- Degree of protection: IP66
- Operating temperature: -20°C to +60°C
- Cover: borosilicate

### ELECTRICAL FEATURES

- Power consumption: 24W
- Power supply:  
12/24 Vdc or 110/230VAC 50/60Hz

### APPLY TO

- Heliport

### CERTIFICATIONS

- CE marking


### COMPLIANCE

- ICAO, Annex 14, Vol. II, "Heliports"
- ICAO Heliport Manual
- ENAC, regulation "Costruzione ed esercizio degli eliporti"
- CAP437 "Standards for offshore helicopter landing areas"


### ORDER CODE

**HFL-LXS-10K**


**SIDE VIEW**

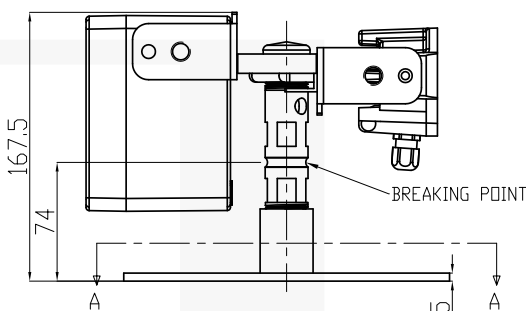

**TOP VIEW**

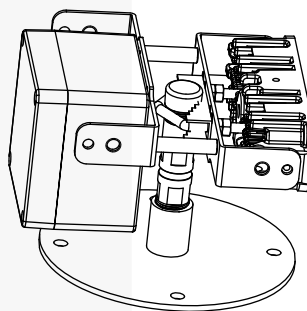


**BOTTOM VIEW**

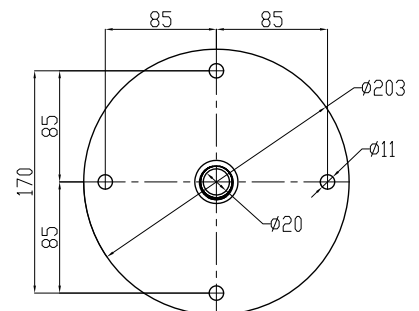

# HELIPORT LIGHTS


## HELIPORT FLOODLIGHT TECHNICAL DIAGRAMS

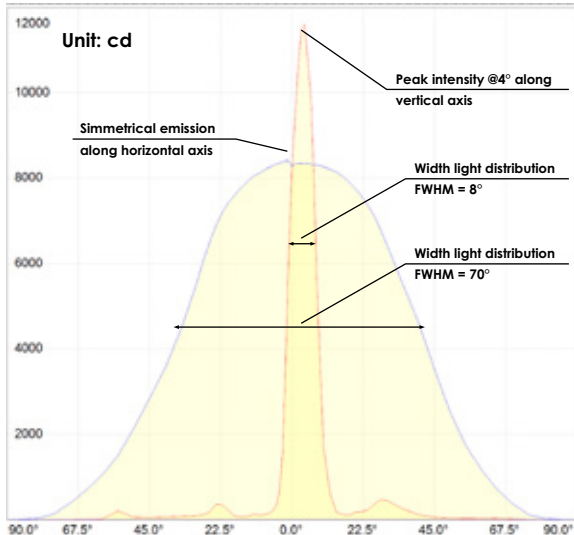

**Cartesian Diagram**

— C90 - C270


— C0 - C180

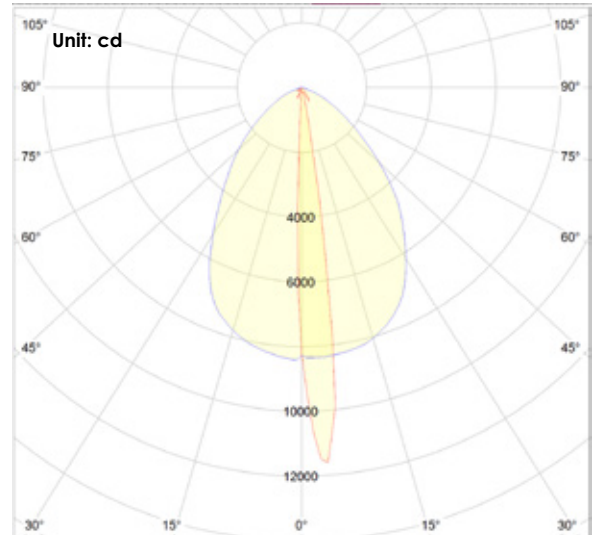

**Polar Diagram**

— C90 - C270

— C0 - C180

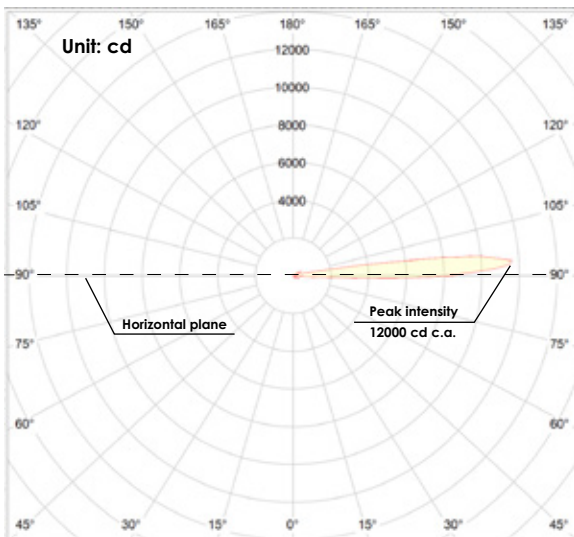

**Polar Diagram**

— C0 - C180

C-planes are used in photometric curves in order to completely describe a photometric solid.


They are section planes which have in common the optical axis of the light source and are classified by the letter C followed by the rotation angle with respect to the reference plane.

So, C0-C180 and C90-C270 are orthogonal planes to each other and in particular plane C0-C180 is referred to the horizontal direction while plane C90-C270 is referred to the vertical direction.



# HELIPORT LIGHTS

## HELIDECK MONITORING SYSTEM REPEATER STATUS LIGHTS for Safe Area applications - Unclassified

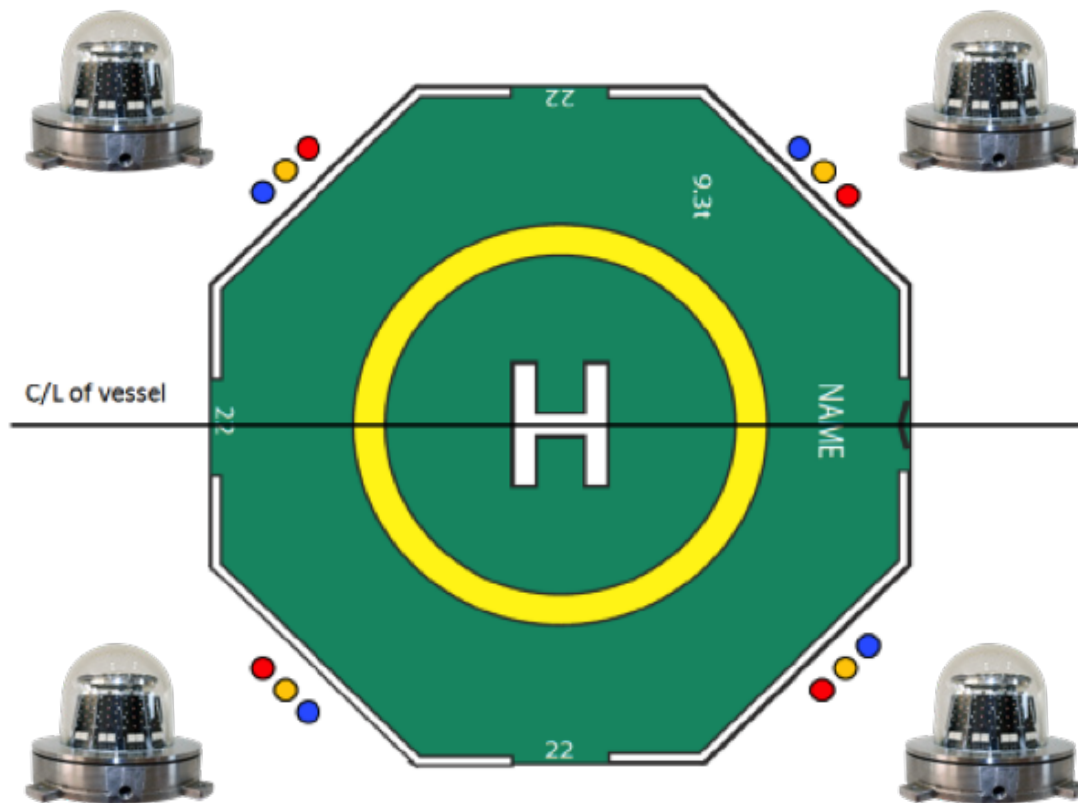

According to **CAP437 "Standards for Offshore Helicopter Landing Areas" 8th Edition**, from 1st April 2021 all moving helidecks must be provided with a **Helideck Monitoring System** compliant with **Rev.9** or later of the standard published on the **Helideck Certification Agency's** website.

The Helideck Monitoring System provides information on helideck movement and includes a helideck mounted light signalling system. **This system indicates the motion status of the helideck directly to pilots prior to landing, and provides warnings of any deterioration in conditions after landing.**



# HELIPORT LIGHTS

## REPEATER STATUS LIGHT

Tempered glass dome

Light specifically designed to comply with UK standards



Terminal box

<150mm light elevation from helideck surface

IP66

LUXSOLAR HMS-LXS-Ex Helideck Monitoring Light System is realized as **fully in compliance with Standard Helideck Monitoring Systems and CAP437 standards.**

With a **compact body high quality materials for maximum resistance to salt-atmosphere** during the years, **high quality and ultra-bright LEDs**, customized lenses for optimum light emission, **LUXSOLAR HMS-LXS beacons are the most up-to-dated and technologically advanced lighting system for Helideck operations.**

The system comes with a **dedicated LUXSOLAR control panel** that can be provided suitable for safe or hazardous area, **easy and quick to install and connect to helideck Motion Monitoring System** for an high performance and safe lighting system.

### CERTIFICATION



### FEATURES



### TYPICAL APPLICATION



# HELIPORT LIGHTS

## REPEATER STATUS LIGHT TECHNICAL SPECIFICATION

### OPTICAL FEATURES

- Based on LED technology
- AMBER/RED/BLUE light in one light fixture
- FLASHING/STEADY burning mode as per CAP437
- Horizontal beam radiation: 360°
- Vertical beam spread: as per CAAi rule

### LIGHT MECHANICAL FEATURES

- Marine grade aluminum, painted RAL7035 (as option SS316L body material, natural finish)
- SS316L fixing bracket, natural finish
- Borosilicate glass cover protection
- Degree of protection: IP66
- Ambient temperature: -50°C to +60°C
- Lamp unit weight: 19Kg

### PANEL MECHANICAL and ELECTRICAL FEATURES

Common features:

- Complete with LUXSOLAR electronic components for HMS Repeater System operation
- Complete with 3 contacts to connect to helideck's Helideck Monitoring System (HMS)
- Power consumption for HMS Repeater Light LUXSOLAR system (4HMS lights + 1 Control Panel): 300W approx

Specific features for Safe Area Control Panel:

- Available in carbon steel (painted RAL7035) or SS316L (natural finish) material
- Ambient temperature: -20°C to +50°C

Specific features for Hazardous Area Control Panel:

- Available in SS316L (natural finish) or aluminium (painted RAL7035) material
- Ambient temperature: -50°C to +50°C

### ORDER CODE

HMS-LXS-IP-

1

2

Number of lights per system = N

IP = Panel suitable for safe area

Ex = Panel suitable for hazardous area

### APPLY TO

- Vessel
- Floating Production Unit
- Semi-Submersible Rig
- Floating Jack Up Rig
- Any other moving helideck

### COMPLIANCE


- CAP437 - Standards for Offshore Helicopter Landing Area
- Standard Measuring Equipment for Helideck Monitoring System (HMS) and Weather Data

### CERTIFICATION

- Statement of Compliance issued by CAAi


### ORDER CODE

**HLW-LXS-IP**

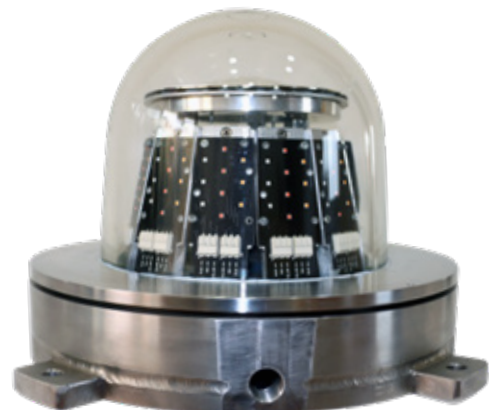


# HELIPORT LIGHTS


## REPEATER STATUS LIGHT LIGHT DISTRIBUTION STEADY

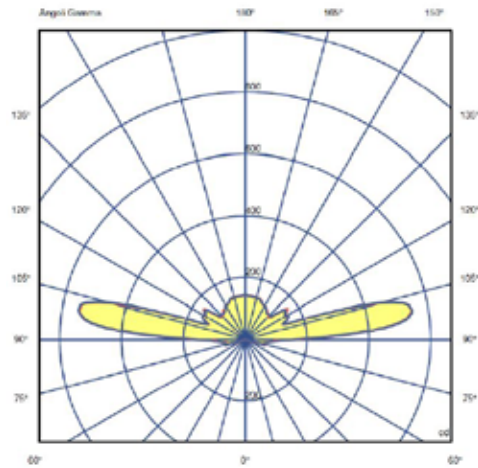


**Amber Light DAY**

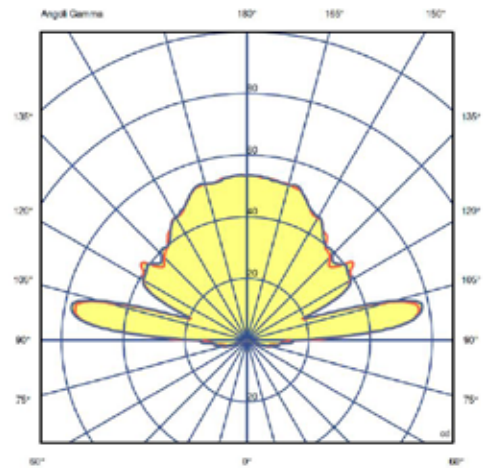


**Amber Light NIGHT**

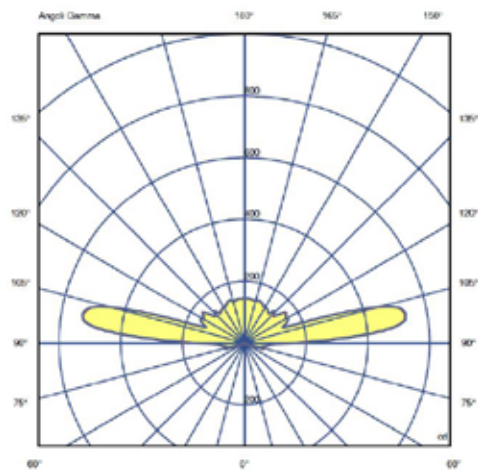


**Red Light DAY**

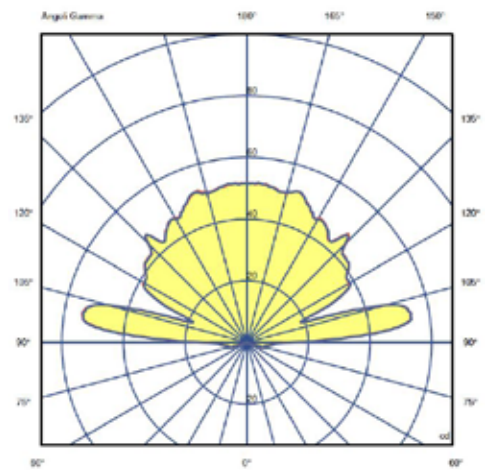

**Red Light NIGHT**

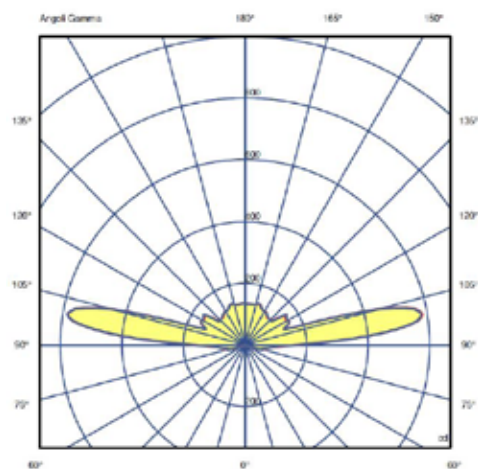

**Blue Light DAY**

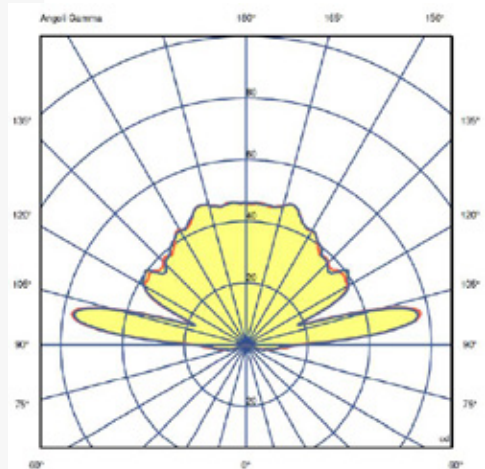


**Blue Light NIGHT**




# HELIPORT LIGHTS


## REPEATER STATUS LIGHT LIGHT DISTRIBUTION FLASHING

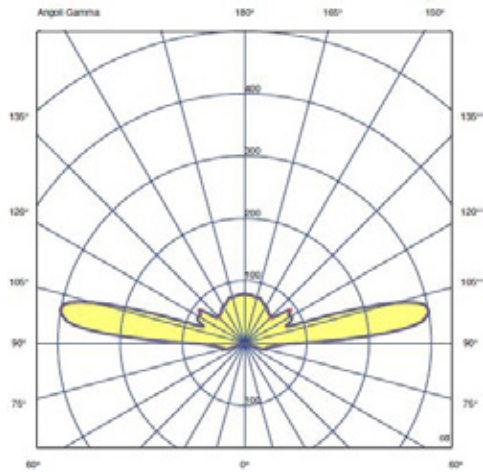


**Amber Light DAY**

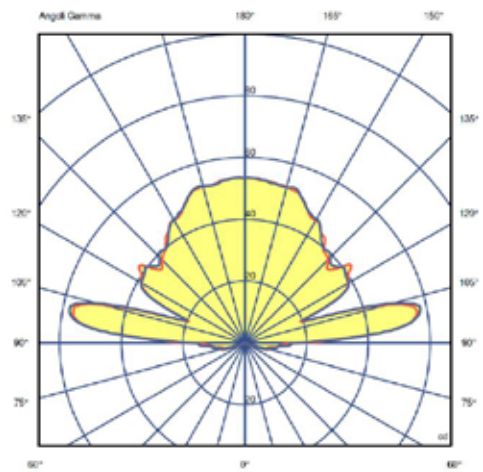


**Amber Light NIGHT**

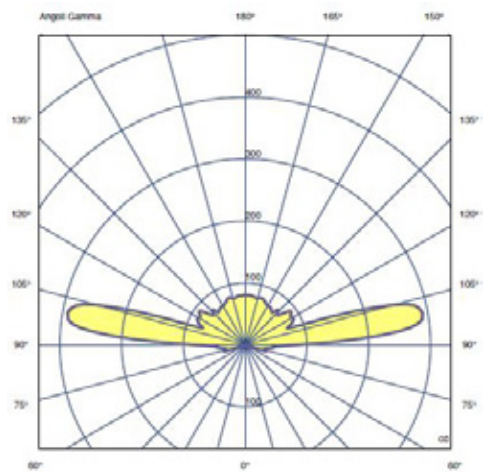


**Red Light DAY**

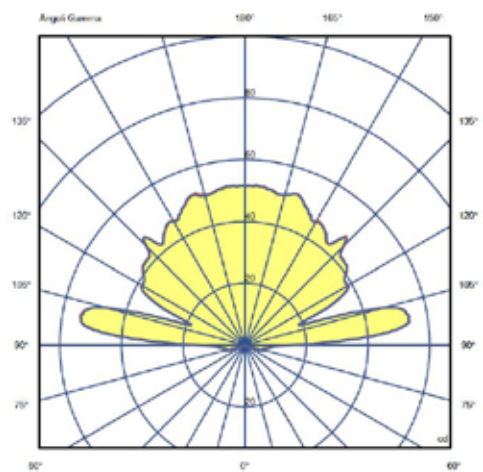

**Red Light NIGHT**

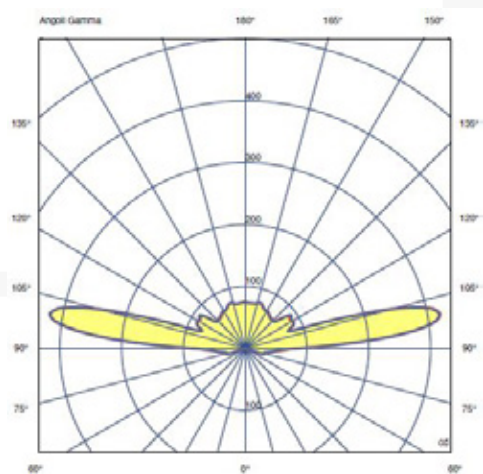




**Blue Light DAY**

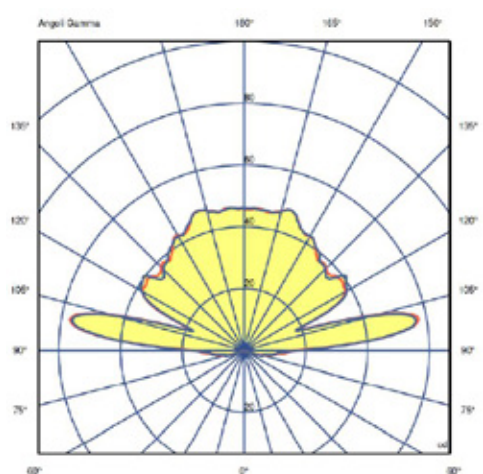


**Blue Light NIGHT**

# HELIPORT LIGHTS


## REPEATER STATUS LIGHT TECHNICAL DRAWINGS

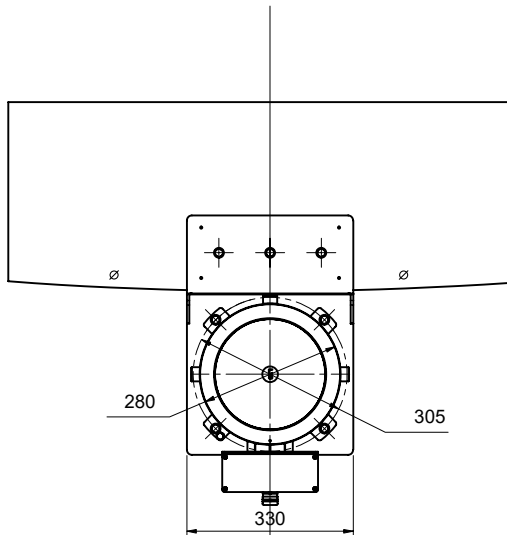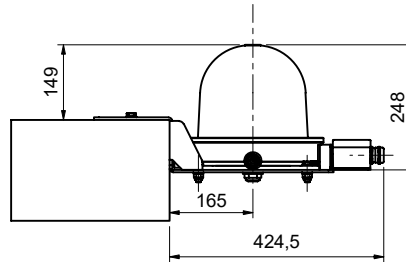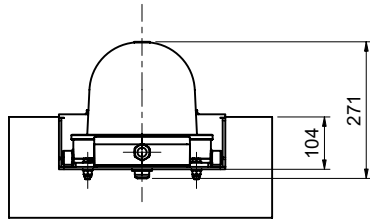

### LATERAL FIXING

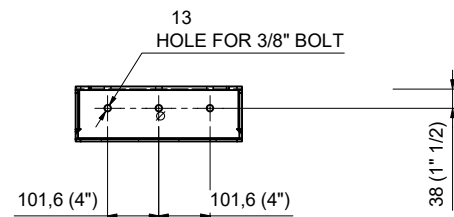


### TOP FIXING

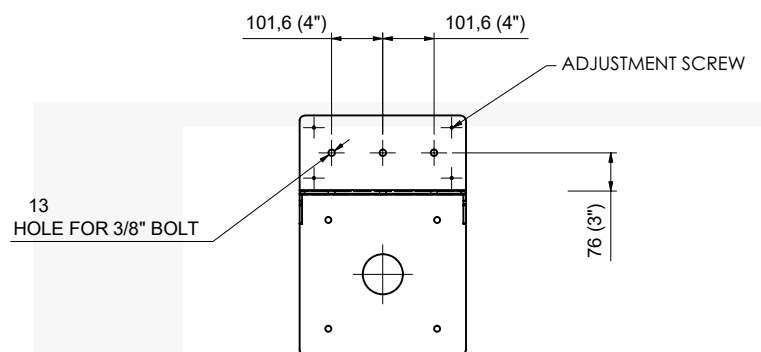


# HELIPORT LIGHTS

## REPEATER STATUS LIGHT TECHNICAL DRAWINGS

### TYPICAL CONFIGURATION HAZARDOUS AREA PANEL

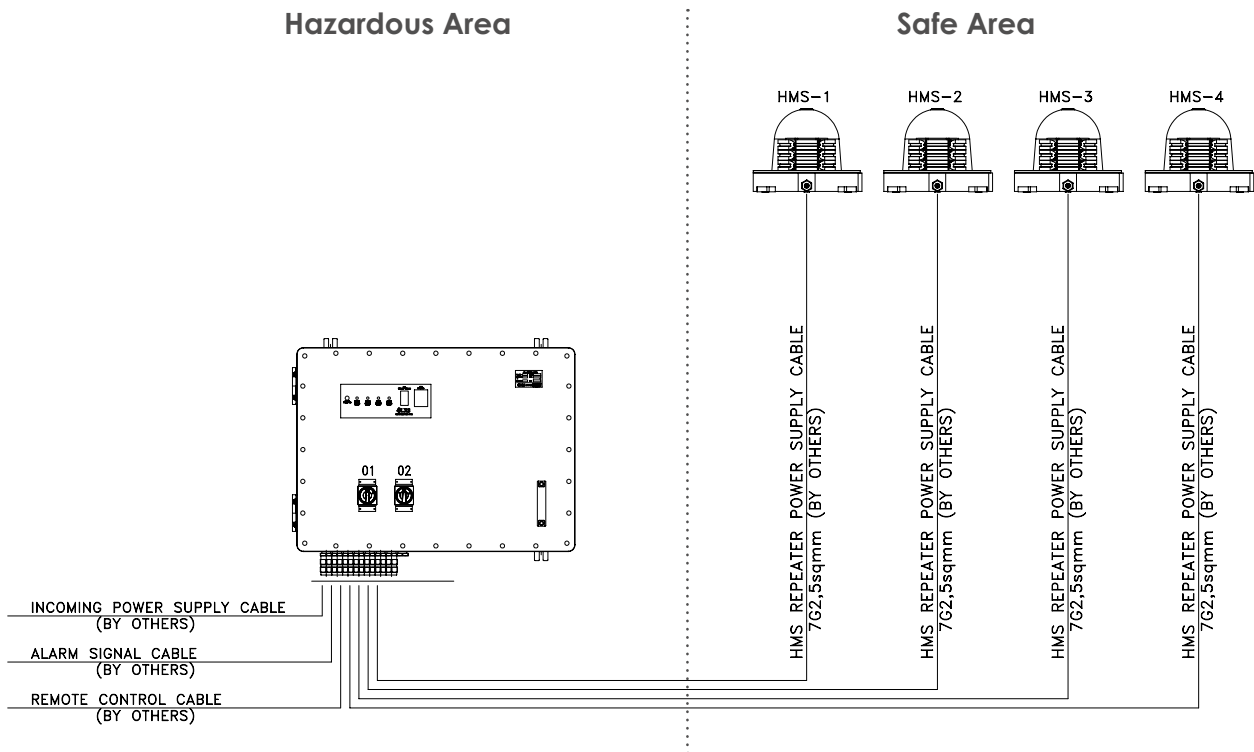

### TYPICAL CONFIGURATION SAFE AREA

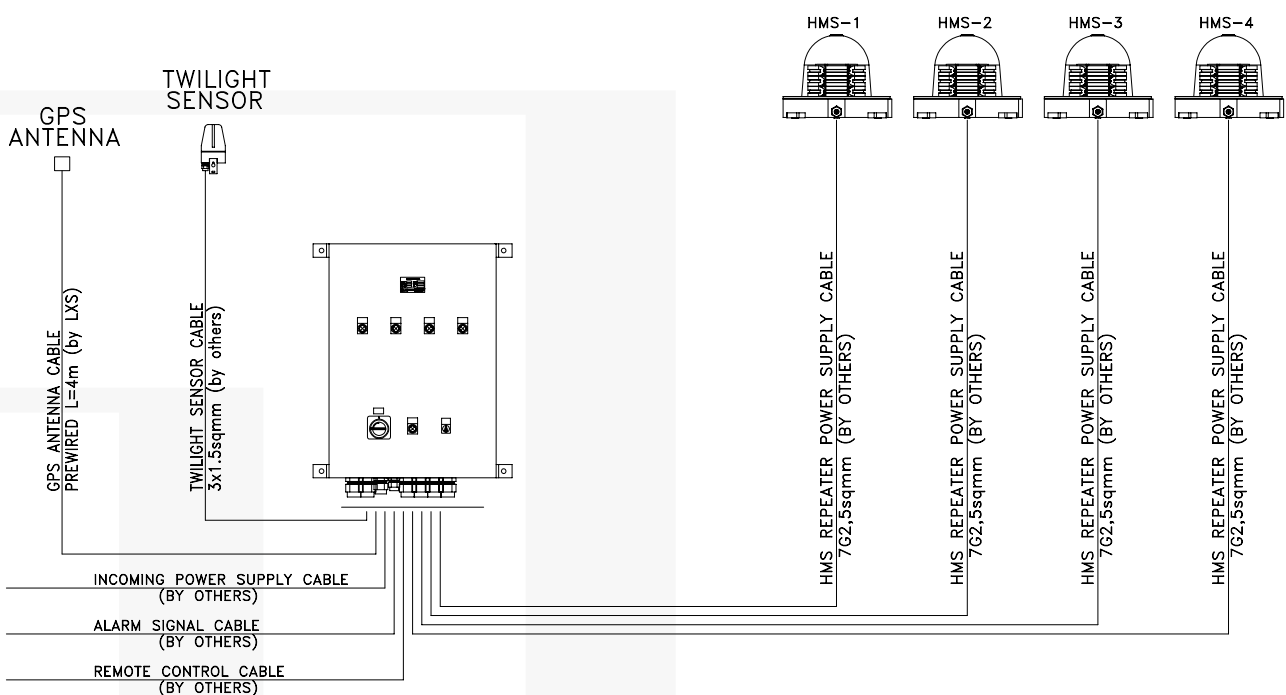

# HELIPORT LIGHTS

## LXS PORTABLE LIGHTING SYSTEM LXS-RESCUE




**PATENTED**

During **emergencies**, helipads where night operations are authorized become a crucial infrastructure. To cope with this need, Luxsolar R&D team has developed a **portable lighting system**.

Such lights create a temporary helipad perimeter landing area, allowing helicopters to operate safely.

LXS-Rescue is a versatile product: it can be used in several situations and operated by non-technical personnel, such as police force, emergency and rescue teams, highways employers, service areas employers, etc.

## SUGGESTED CONFIGURATION

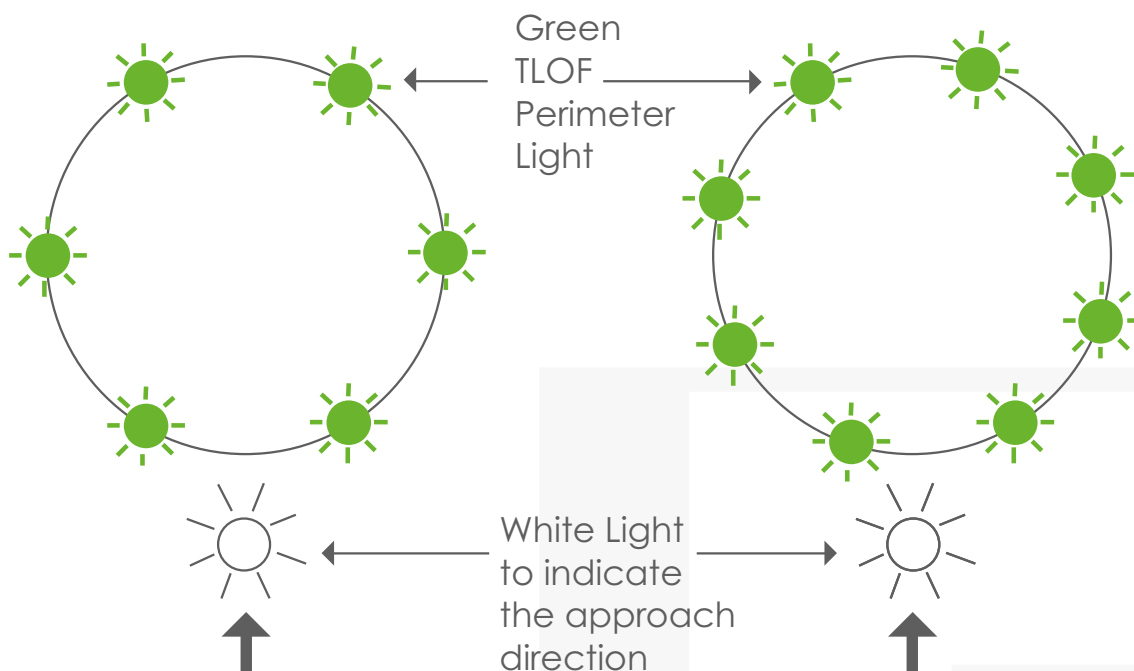

### COMPLIANCE



### FEATURES





# HELIPORT LIGHTS

## LXS PORTABLE LIGHTING SYSTEM TECHNICAL SPECIFICATIONS

### OPTICAL FEATURES

- Horizontal beam radiation: 360°
- PC lenses
- FATO perimeter light (white)

Elevation (E)	Luminous Intensity [cd]
30°	10
20°	50
20°	100
10°	
3°	
0°	10

-180° Azimuth +180°

- TLOF perimeter light (green)

Elevation (E)	Luminous Intensity [cd]
20° < E ≤ 90°	3
13° < E ≤ 20°	8
10° < E ≤ 13°	15
5° < E ≤ 10°	30
2° < E ≤ 5°	15

-180° Azimuth +180°

### MECHANICAL FEATURES

- Light body: GRP
- NBR O-RING
- Degree of protection: IP68
- Operating temperature: -30°C to +60°C
- Light weight: 1Kg approx
- Trolley housing body: PP + Nylon
- System total weight < 20kg

### ELECTRICAL FEATURES

- Light power supply: battery LI-ION
- Wireless recharging system
- Housing power supply: 115/230 Vac through dedicated cable
- Light intensity adjustable: 50% - 100%
- Autonomy: up to 100 hours
- Twilight sensor
- Switch for on/off and adjust light intensity

### OPTIONS

- IR Wavelength: 850nm, compatible with pilot's NVG
- 7 lights system or 9 lights system
- Lights available in 5 colors:
  - ● Green light
  - ○ White light
  - ● Red light
  - ● Yellow light
  - ● Blue light

### COMPLIANCE

- ICAO Aerodromes- Annex 14, Volume 2, Heliports
- EASA CS-HPT-DSN
- Trolley: STANAG, DEF STAN and NATO approved


### PART NUMBER

**LXS-RESCUE**


# HELIPORT LIGHTS

## LXS PORTABLE LIGHTING SYSTEM TECHNICAL DRAWING

### 7 LIGHTS VERSION

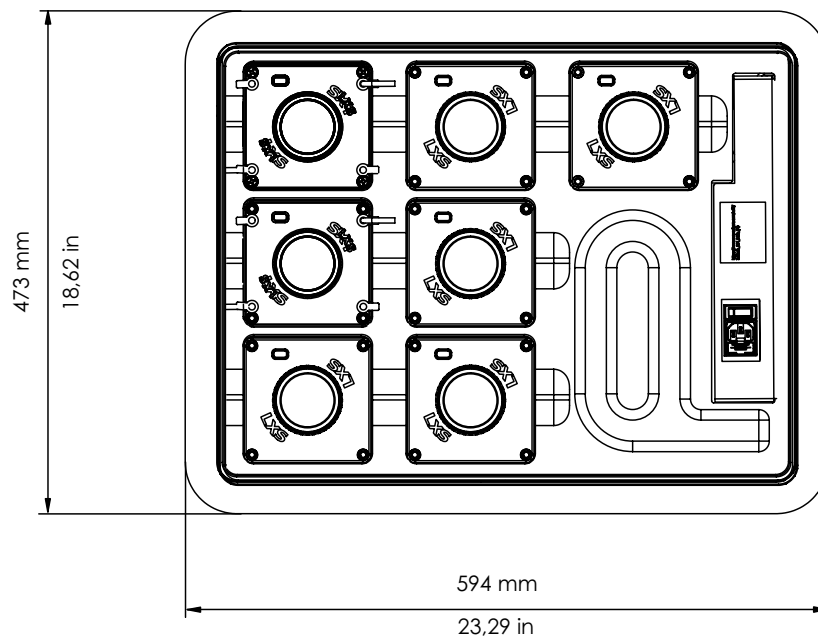


### 9 LIGHTS VERSION

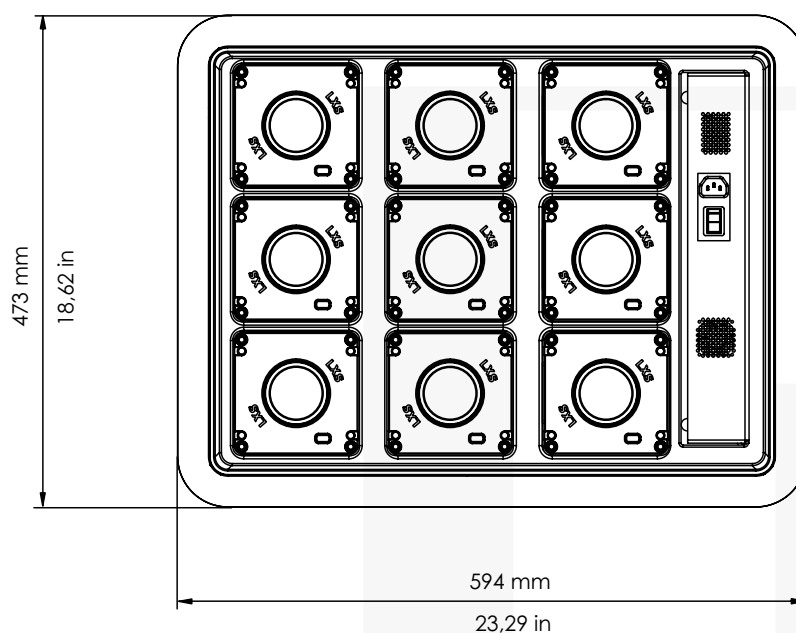

# HELIPORT LIGHTS

## LXS PORTABLE LIGHTING SYSTEM TECHNICAL DRAWING

### SINGLE LIGHTING ELEMENT

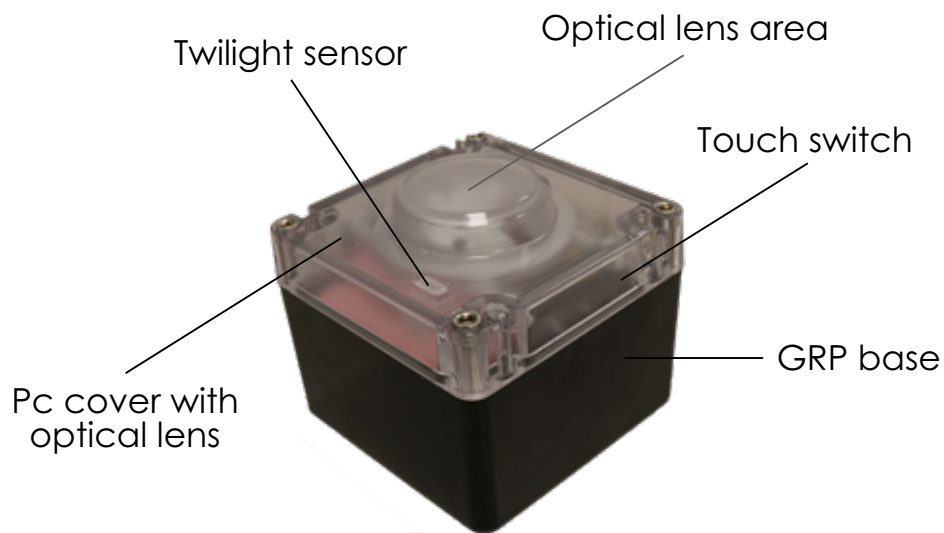


### TROLLEY



## RADIO RECEIVER/DECODER L854-LXS

Pilots use this device in air-to-ground communication.

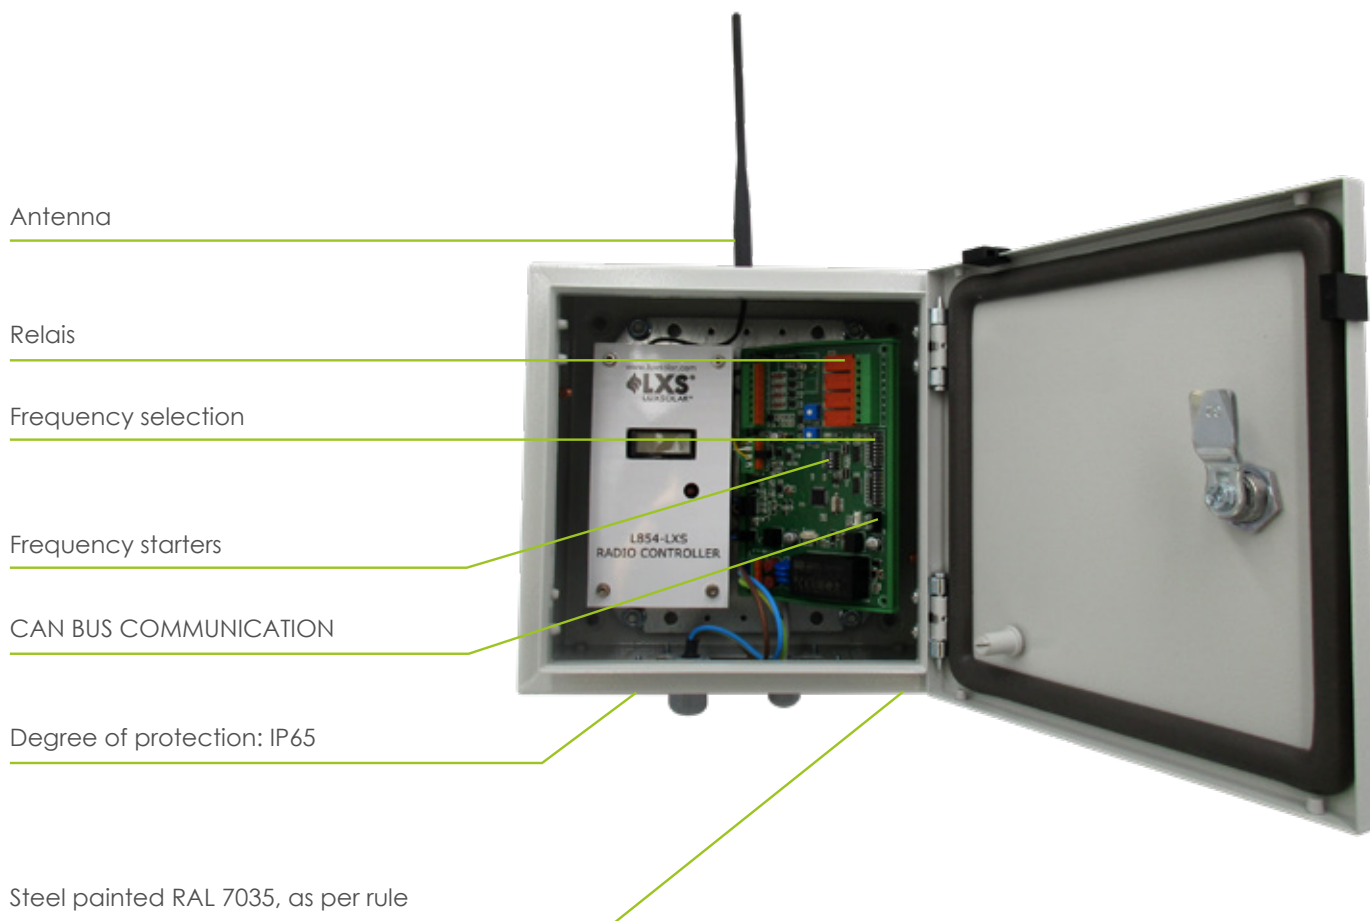

**L854-LXS** device lets the pilots turn on and control the heliport lighting system. This system is essential for landing where there's no ground crew and it makes the control of the beacons (**as TLOF, WINDSOCKS, ASPSL lighting, etc.**) easier and faster.

Luxsolar has developed the Radio Receiver/Decoder L854 that, with a series of clicks, lets the pilot turn-on and set the heliport beacons intensity.

The System is designed for automatic shutdown after 15 minutes. It allows to avoid waste and decrease the light pollution. It's possible to set the off time.

### CERTIFICATIONS



### COMPLIANCE



### FEATURES



## RADIO RECEIVER/DECODER TECHNICAL SPECIFICATIONS

### OPERATION

The pilot turns the Radio System on with the on-board communication button. According to the number of clicks, the lighting system turns at different intensity on:

- **3 clicks:** low intensity
- **5 clicks:** medium intensity
- **7 clicks:** high intensity

### MECHANICAL FEATURES

- FAA L854 Type I: air-to-ground
- Pilot's Control Lights (PCL) Type J: clicks turned from the PTT button on
- System enabling in 5 seconds
- Auto power off after 15 minutes of downtime
- Operating frequency: 118-136MHz
- Operating temperature: -40°C / +55°C
- Power supply: 100/240Vac 50-60Hz
- Power supply: version in continuous current is available
- CAN BUS communication

### INCLUDED IN THE SYSTEM


- AM Receiver
  - Decoder Type A
  - Bandwidth: 8.33KHz or 25KHz

### PART NUMBER


**L854-LXS**

## TECHNICAL DRAWINGS


### FRONT VIEW

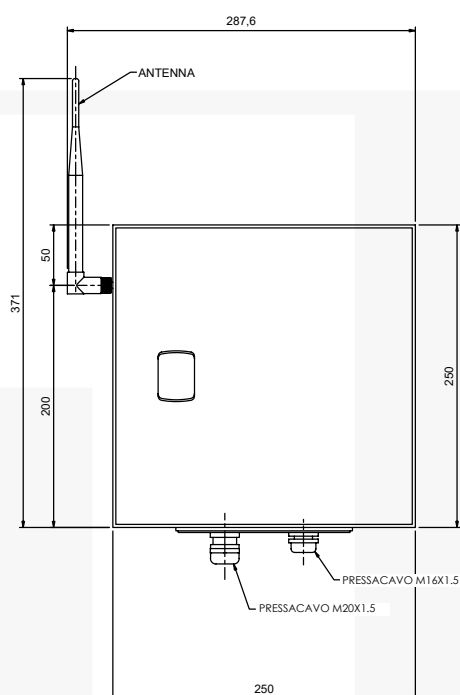

### SIDE VIEW

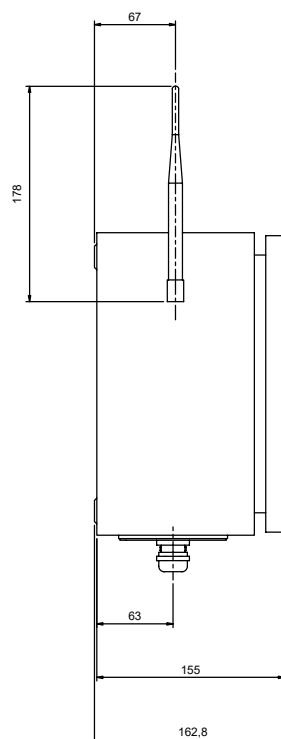



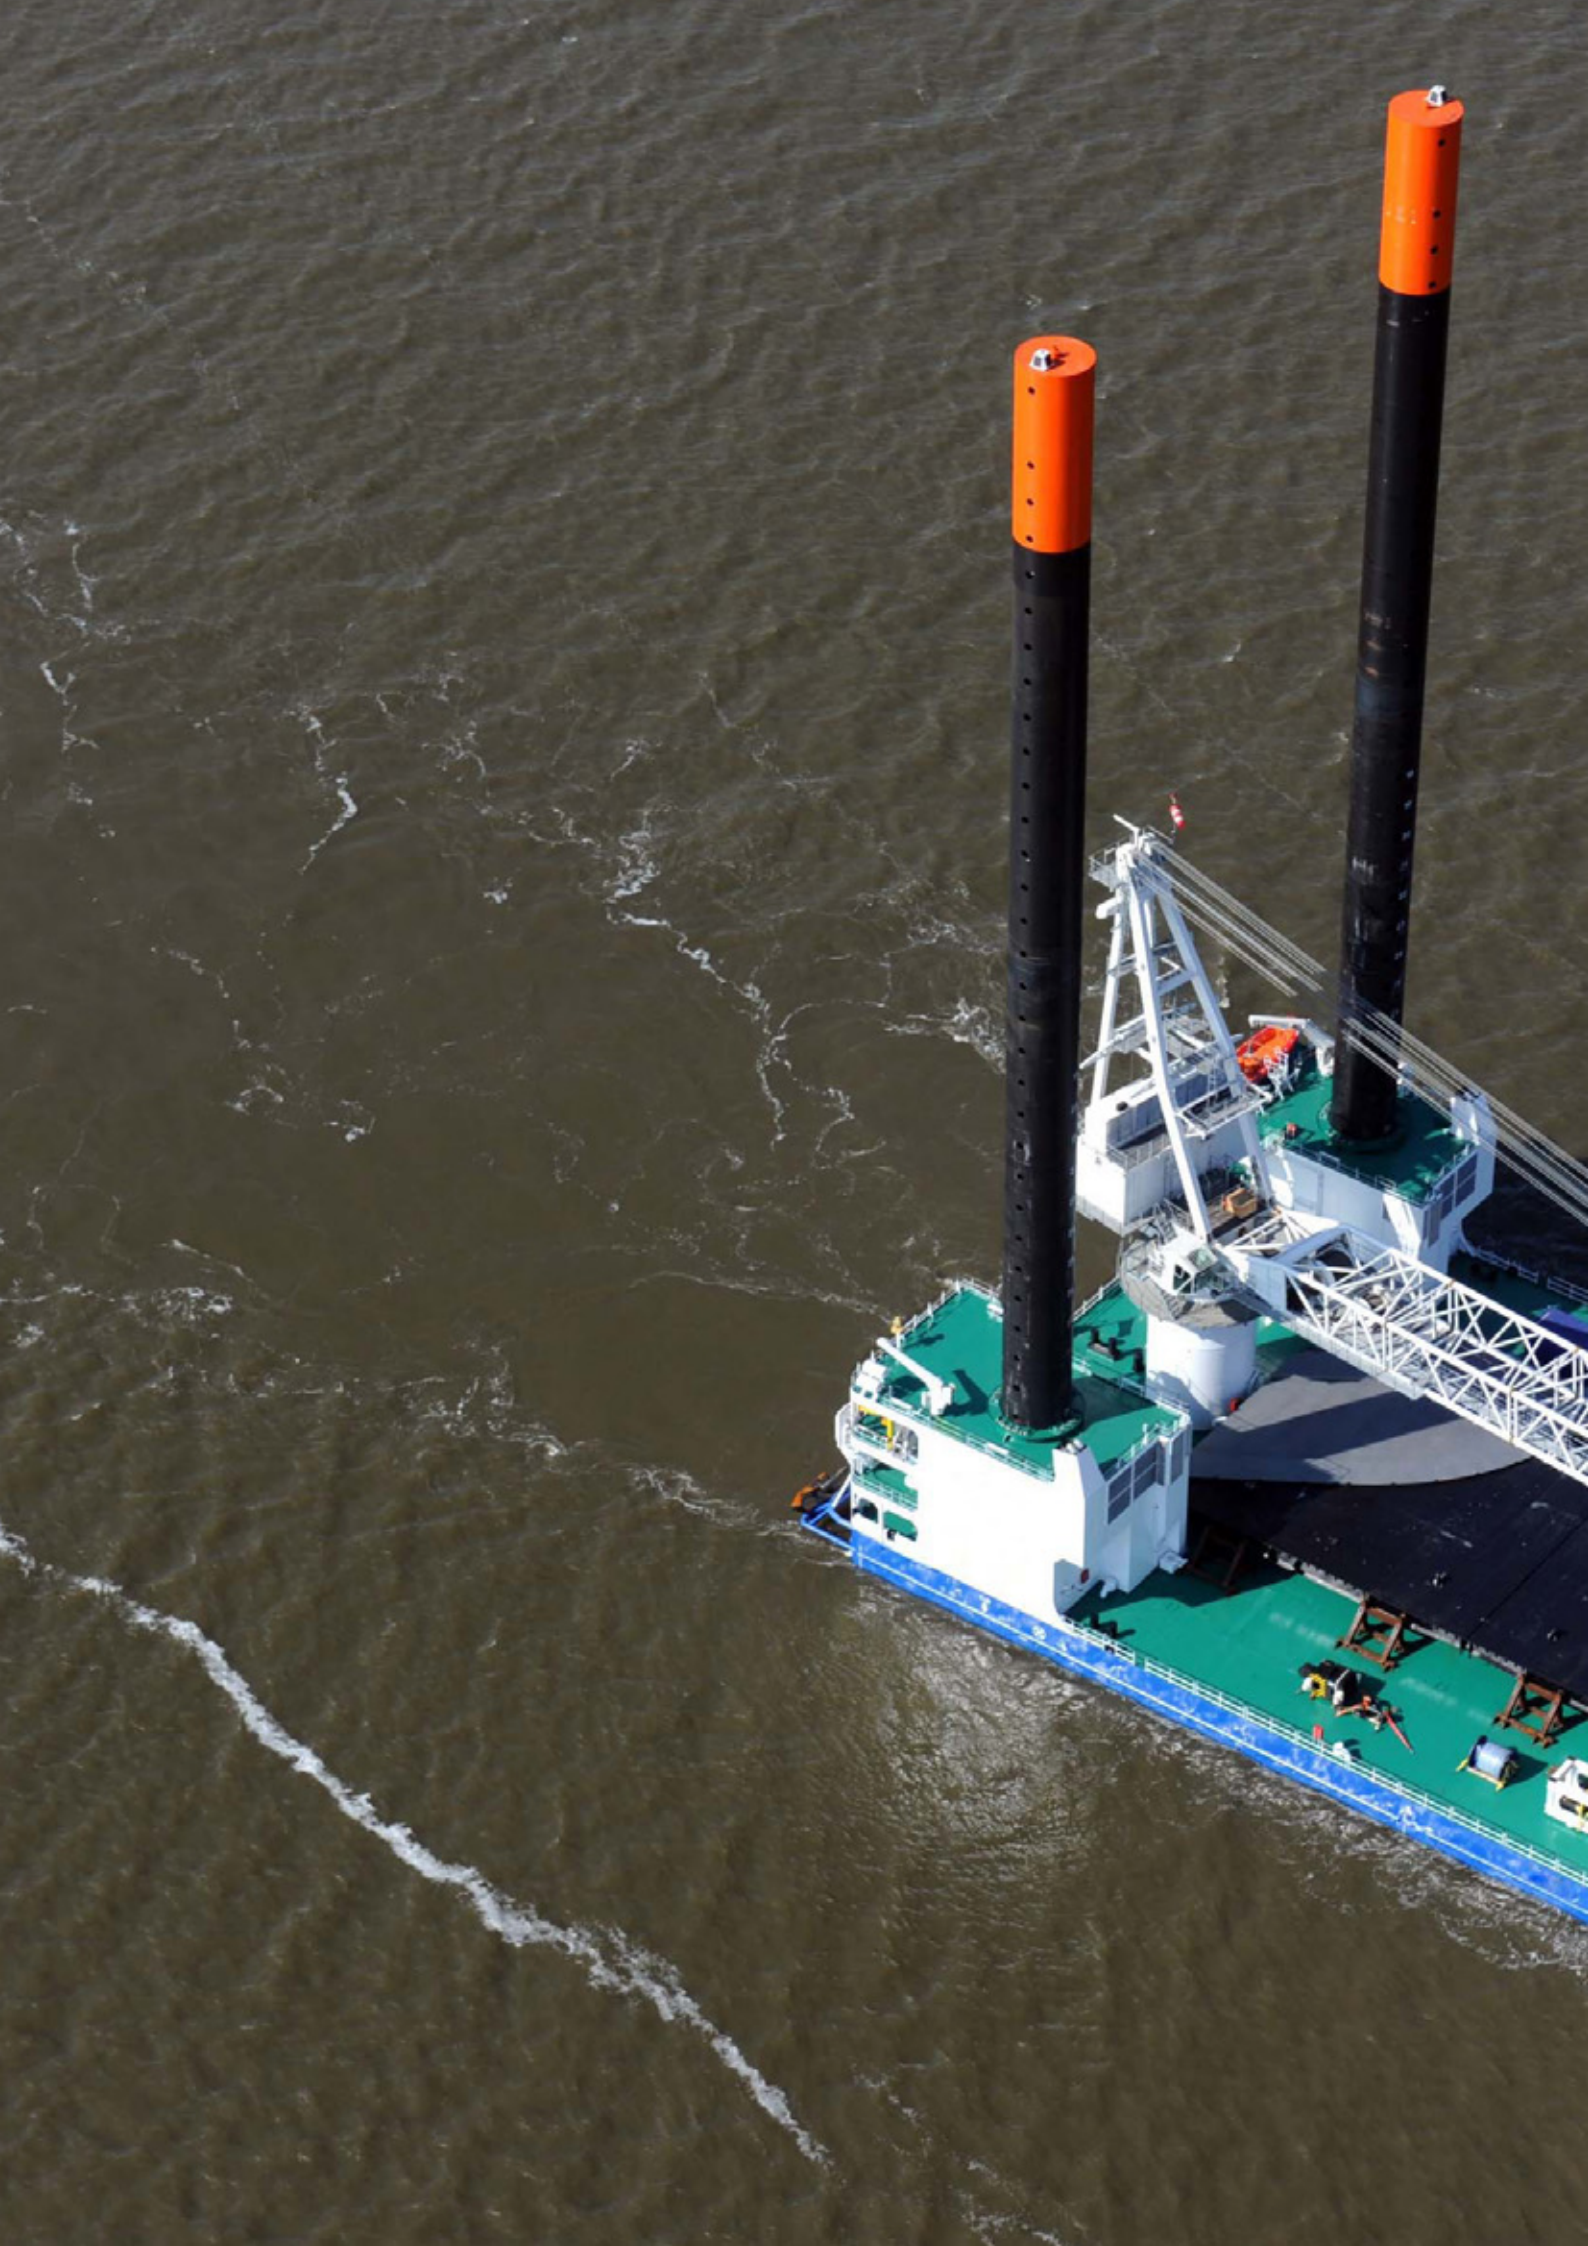








# HELIDECK LIGHTS

## TYPICAL INSTALLATION HELIDECK (Oil&Gas offshore)

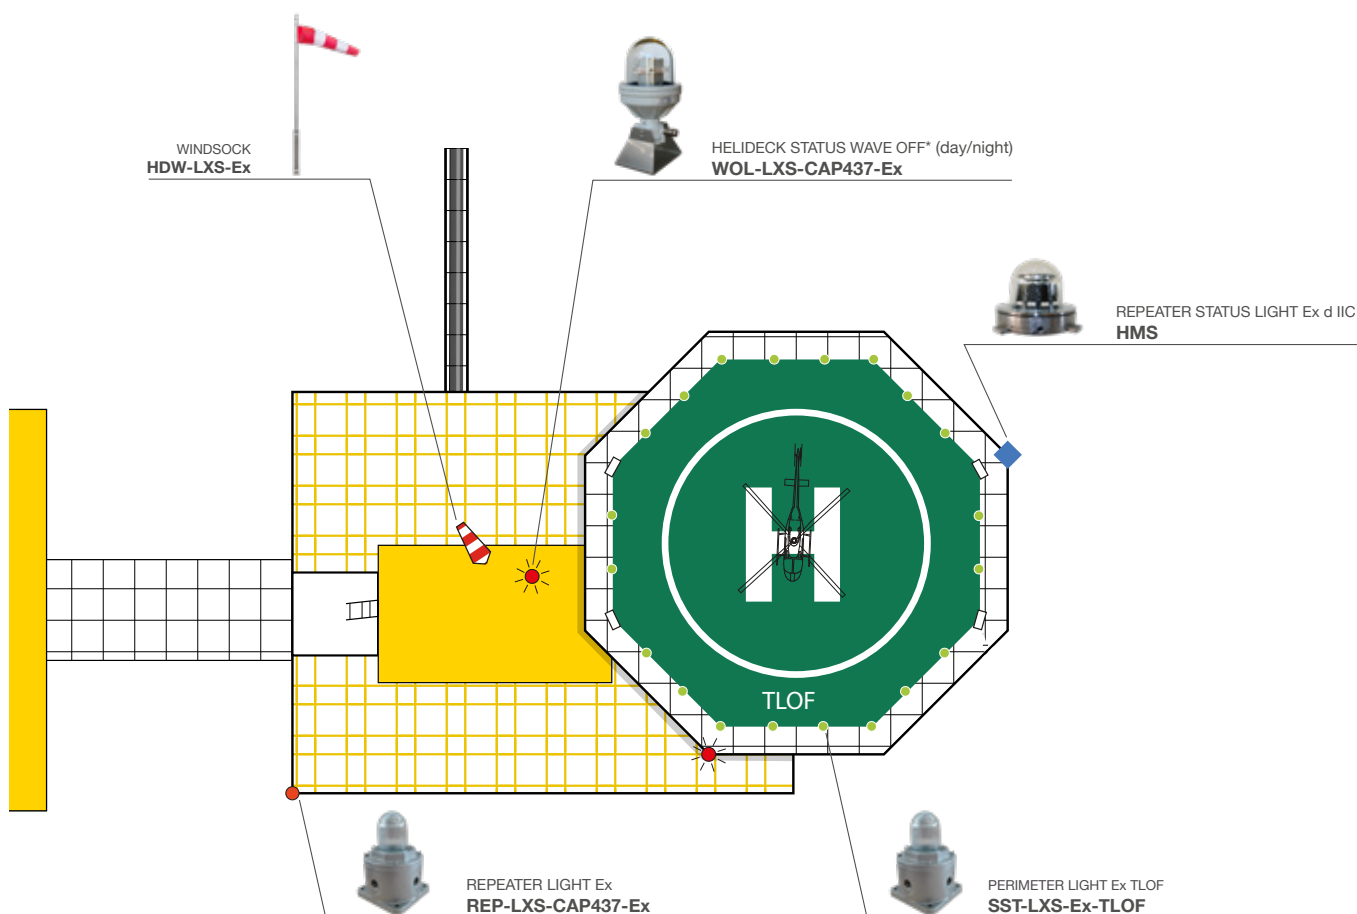

\* REPEATER LIGHT and HELIDECK STATUS WAVE OFF LIGHT are compliant with CAP437

### LEGEND



REPEATER STATUS LIGHT Ex d IIC - HMS



PERIMETER LIGHT Ex TLOF - SST-LXS-Ex-TLOF



HELIDECK STATUS WAVE OFF - WOL-LXS-CAP437-Ex



REPEATER LIGHT Ex - REP-LXS-CAP437-Ex



WINDSOCK Ex - HDW-LXS-Ex

**Helideck:** a heliport located on a fixed or floating offshore facility such as an exploration and/or production unit used for the exploitation of Oil or Gas.


(ICAO Aerodromes Annex 14 - Volume II Heliports - International Standards and Recommended Practices - Chapter 1.1-Definitions)

These lights have been designed for hazardous areas with Ex d IIC and Ex tb protection and are **ATEX**, **IECEx** certified.

# HELIDECK LIGHTS


## HELIDECK MONITORING SYSTEM REPEATER STATUS LIGHTS

Flame-Proof Ex db IIC, Ex tb IIIC  
ZONE 1/21/2/22

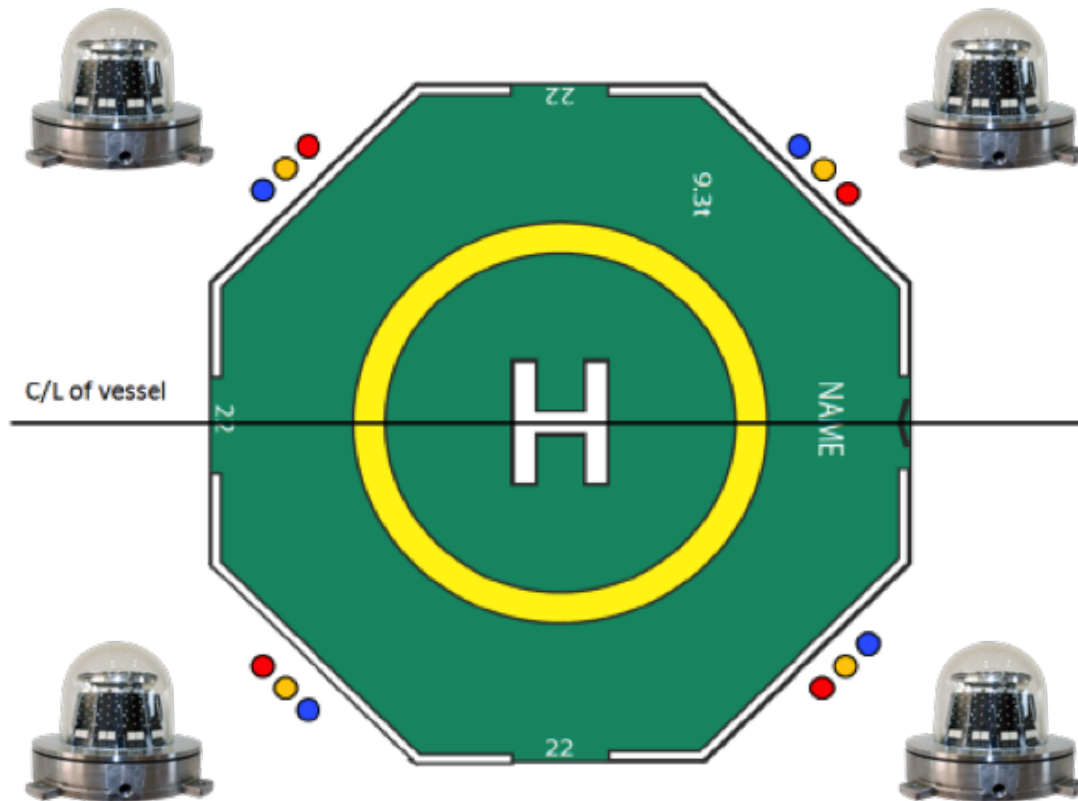


According to **CAP437 "Standards for Offshore Helicopter Landing Areas"**, from 1st April 2021 all moving helidecks must be provided with a **Helideck Monitoring System** compliant with **Rev.9** or later of the standard published on the **Helideck Certification Agency's** website.

The standard requires that unstable/moving landing areas - such helidecks mounted on floating units - must be equipped with a Helideck Monitoring System (HMS) that analyses helideck motion to determine landing conditions. **The HMS-LXS-Ex converts this information into light signals that alert pilots to the helideck's motion status before landing, as well as any changes in weather conditions post-landing.**

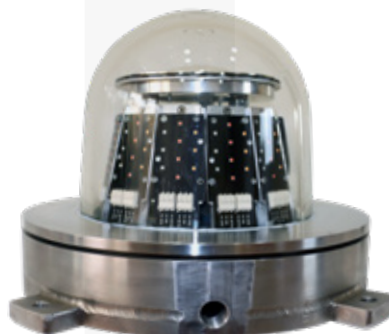

# HELIDECK LIGHTS

## HMS REPEATER STATUS LIGHT Ex db IIC, Ex tb IIC

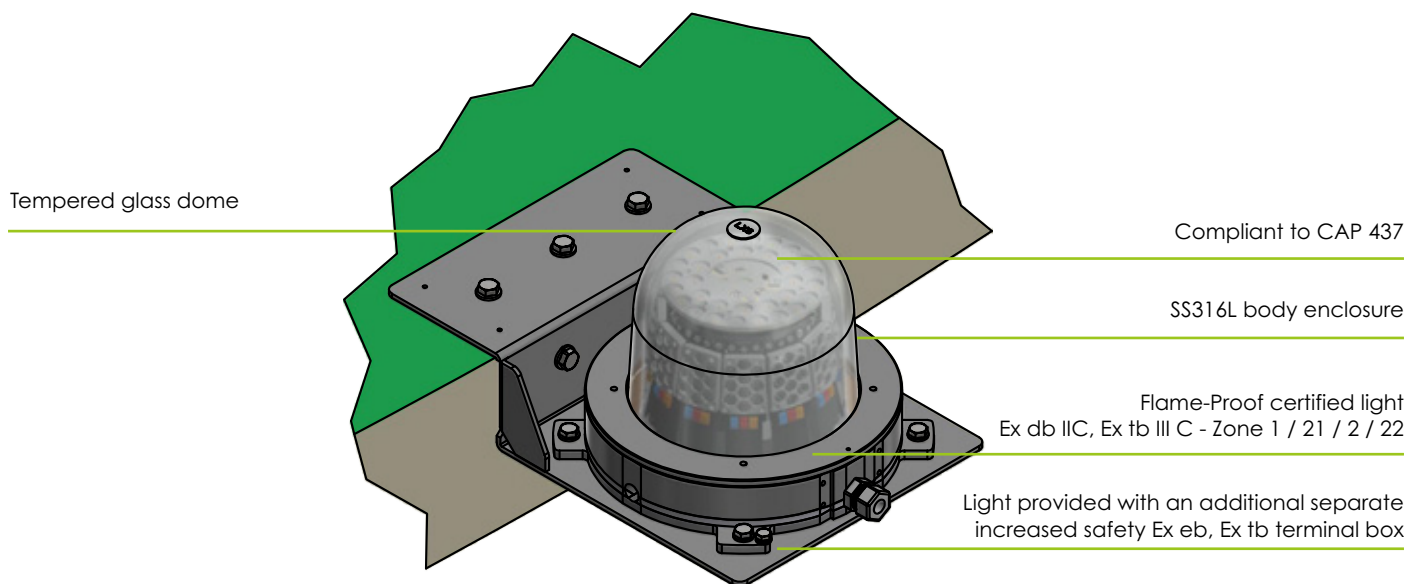

<150mm light elevation from helideck surface

IP66

The LUXSOLAR HMS-LXS-Ex lighting fixtures are in compliance with **CAP437** and **ATEX/IECEx** certified for **Zone 1/21/2/22** according to **EN / IEC 60079-0, EN / IEC 60079-1, EN / IEC 60079-31** standards.

The body is manufactured in SS316L and the cover in borosilicate material to guarantee the maximum resistance to salt-atmosphere and harsh environments over the years. The light emission, thanks to customized lenses and ultra-bright LEDs, is certified by CAAi as in compliance with the applicable rules.

A dedicated control panel, that can be provided for safe (unclassified) or hazardous (ATEX / IECEx certified) areas, completes the system. It contains electronic boards specifically designed to receive inputs from the HMS software and to convert this information into light signals.

### CERTIFICATION



### FEATURES



### TYPICAL APPLICATION



# HELIDECK LIGHTS

## HMS REPEATER STATUS LIGHT Ex db IIC, Ex tb IIC TECHNICAL SPECIFICATION

### OPTICAL FEATURES

- Based on LED technology
- AMBER/RED/BLUE light in one light fixture
- FLASHING/STEADY burning mode as per CAP437 (see page 4)
- Horizontal beam radiation: 360°
- Vertical beam spread: as per CAAi rule
- ATEX execution:  
II 2GD Ex db IIC T... Gb  
Ex tb IIIC T...°C Db
- IECEx execution:  
Ex db IIC T... Gb  
Ex tb IIIC T...°C Db

### LIGHT MECHANICAL FEATURES

- SS316L body material, natural finish
- SS316L fixing bracket, natural finish
- Borosilicate glass cover protection
- Degree of protection: IP66
- Ambient temperature: -50°C to +60°C
- Lamp unit weight: 19Kg approx

### PANEL MECHANICAL and ELECTRICAL FEATURES

#### Common features:

- Complete with LUXSOLAR electronic components for HMS Repeater System operation
- Complete with 3 contacts to connect to helideck's Helideck Monitoring System
- Power consumption for HMS Repeater Light LUXSOLAR system (4HMS lights + 1 Control Panel): 400W approx

#### Specific features for Safe Area Control Panel:

- Available in mild steel (painted RAL7035) or SS316L (natural finish) material
- Ambient temperature: -20°C to +50°C

#### Specific features for Hazardous Area Control Panel:

- Available in SS316L (natural finish) or aluminium (painted RAL7035) material
- Ambient temperature: -50°C to +50°C

### APPLY TO

- Vessel
- Floating Production Unit
- Semi-Submersible Rig
- Floating Jack Up Rig
- Any other moving helideck

### COMPLIANCE


- CAP437 - Standards for Offshore Helicopter Landing Area
- Standard Measuring Equipment for Helideck Monitoring System (HMS) and Weather Data

### CERTIFICATION

- Statement of Compliance issued by CAAi
- ATEX certificate: EPT 23 ATEX 5254X
- IECEx certificate: IECEx EUT 23.0012X
- CE marking

### ORDER CODE

**HLW-LXS-Ex**

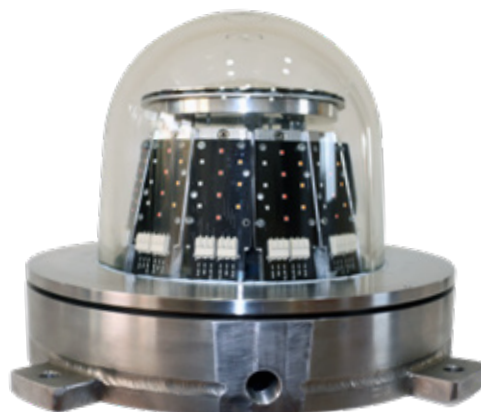

### ORDER CODE

HMS-LXS-Ex- 1 2

Number of lights per system = N


IP = Panel suitable for safe area

Ex = Panel suitable for hazardous area


Note: ambient temperature and temperature classes are assigned as per Ex-certificate parameters.

# HELIDECK LIGHTS


## HMS REPEATER STATUS LIGHT Ex db IIC, Ex tb IIC LIGHT DISTRIBUTION STEADY

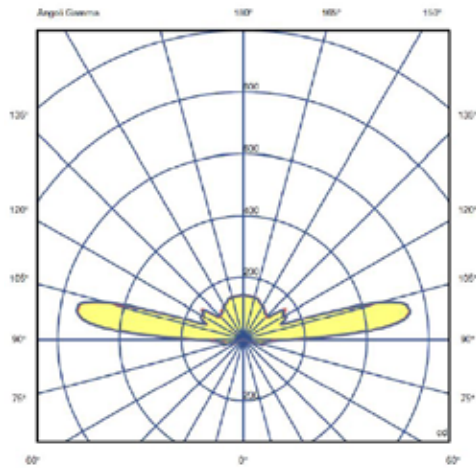


Amber Light DAY

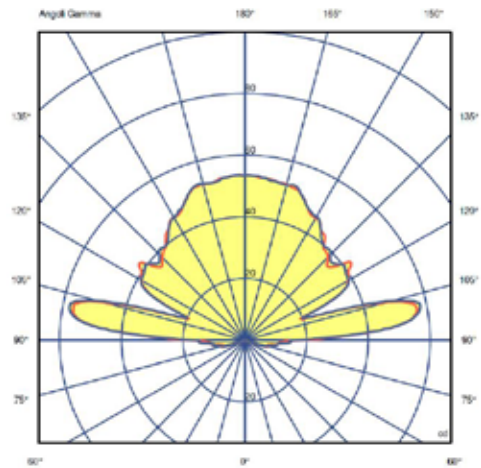


Amber Light NIGHT

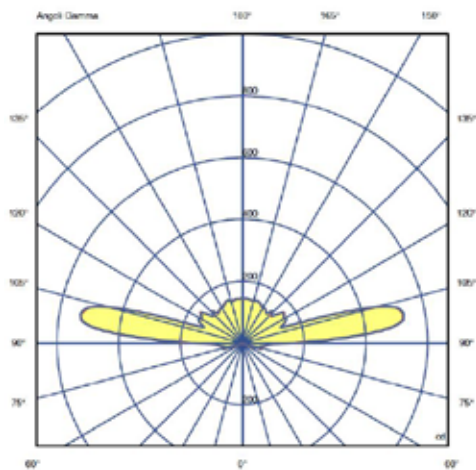


Red Light DAY

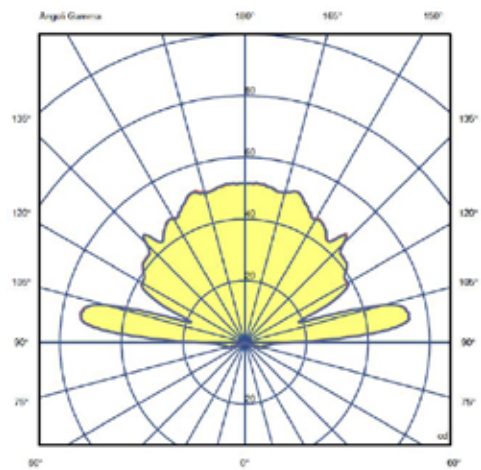

Red Light NIGHT

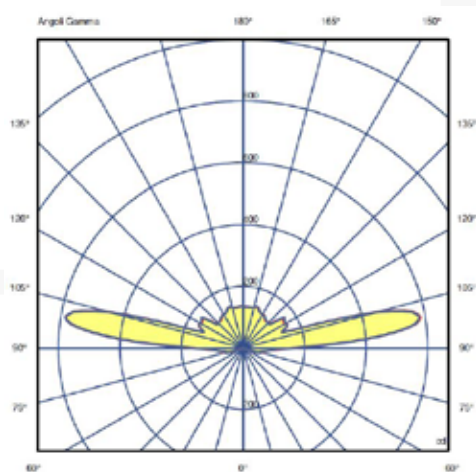

Blue Light DAY

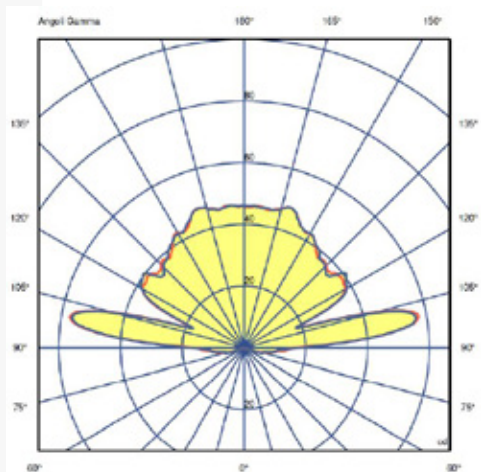


Blue Light NIGHT




# HELIDECK LIGHTS


## HMS REPEATER STATUS LIGHT Ex db IIC, Ex tb IIC LIGHT DISTRIBUTION FLASHING

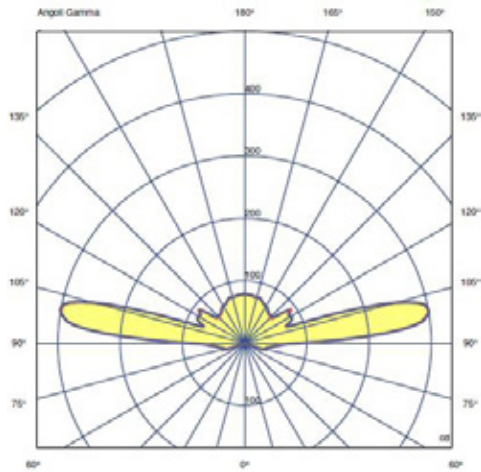


Amber Light DAY

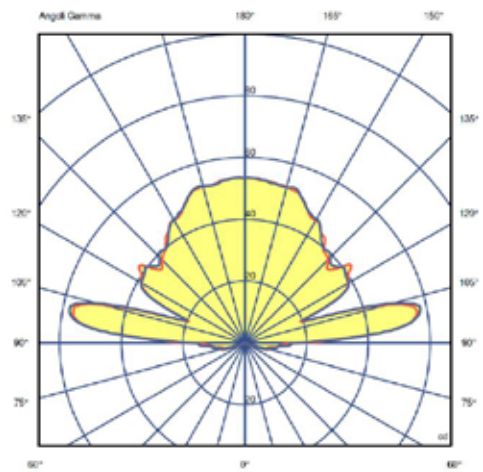


Amber Light NIGHT

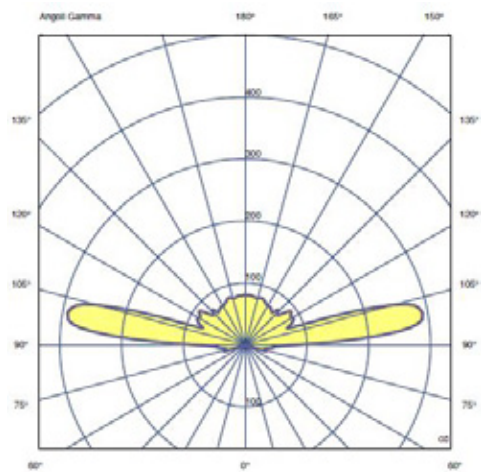


Red Light DAY

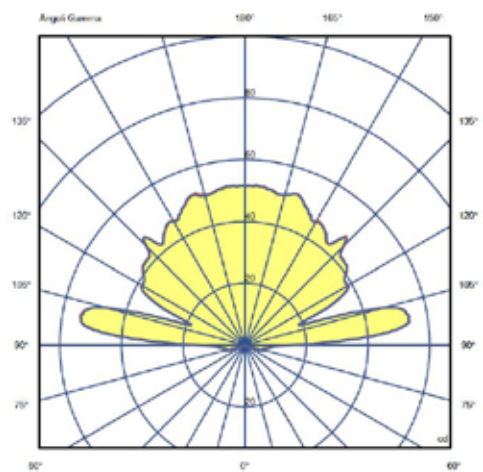

Red Light NIGHT

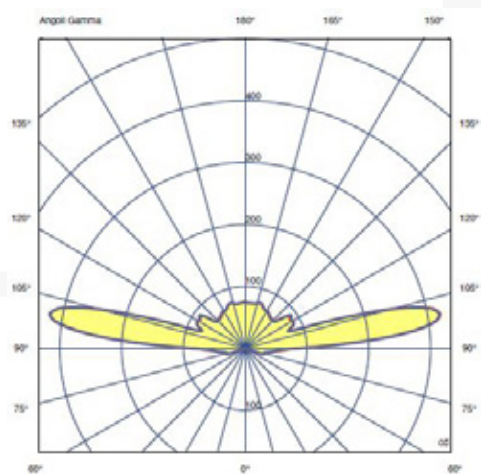

Blue Light DAY

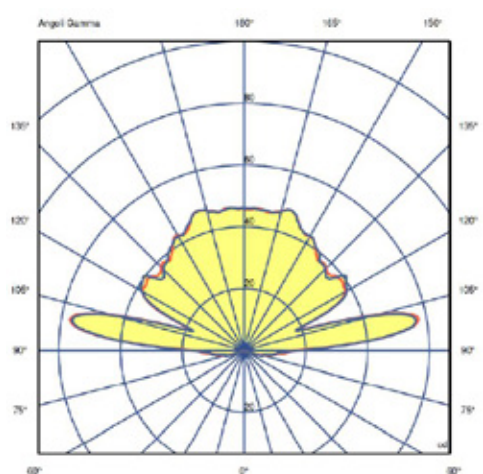


Blue Light NIGHT

# HELIDECK LIGHTS




## HMS REPEATER STATUS LIGHT Ex db IIC, Ex tb IIC TECHNICAL DRAWINGS

BEACON FRONT VIEW


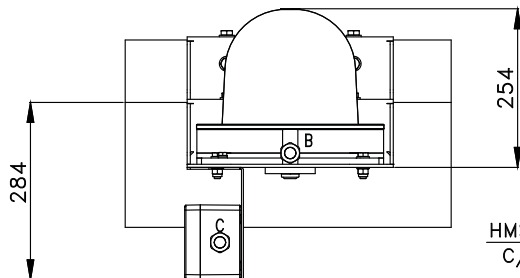


HMS— INCOMING POWER SUPPLY CABLE  
C/W CABLE GLAND ISO M25X1.5

BEACON SIDE VIEW

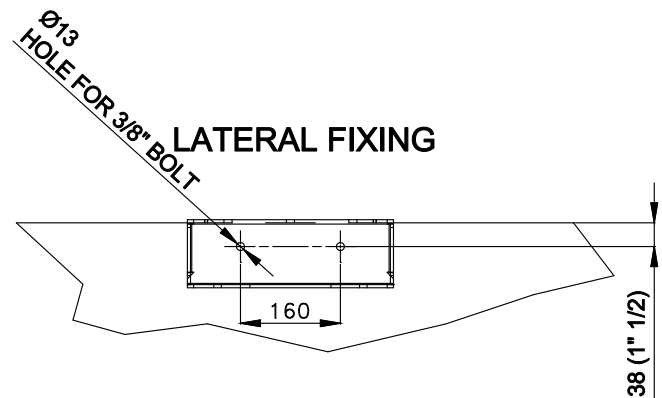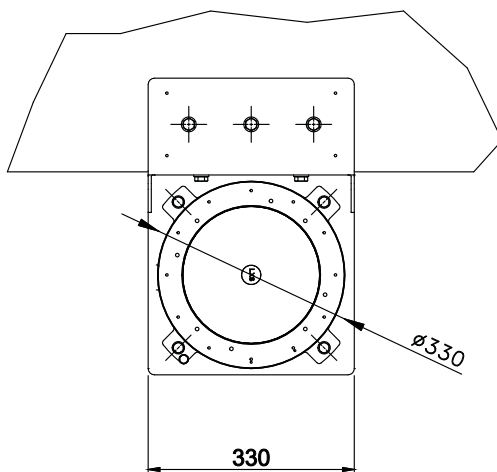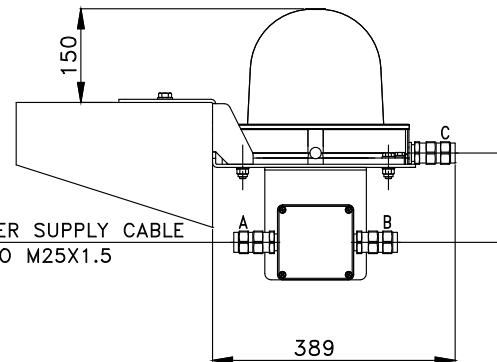


TOP FIXING

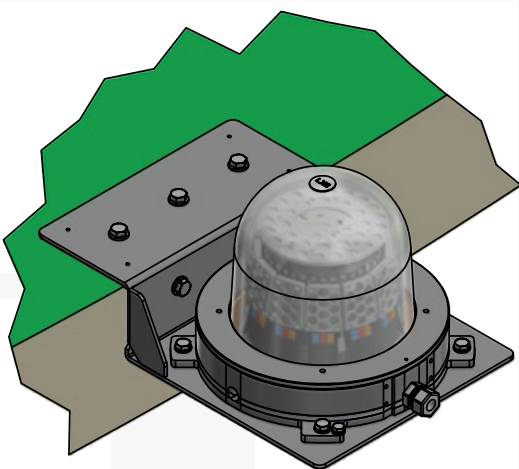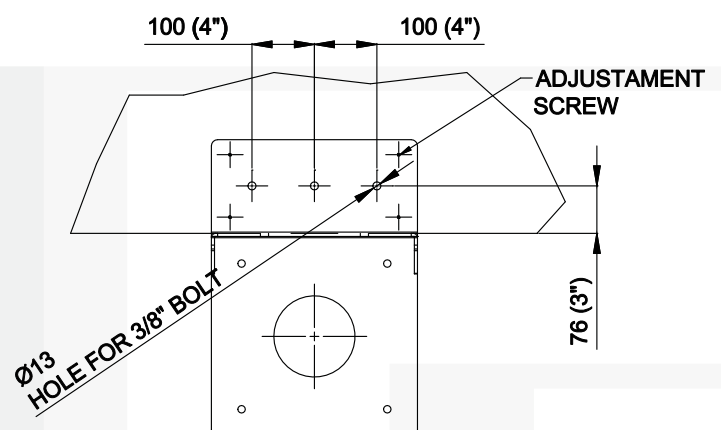


# HELIDECK LIGHTS

## HMS REPEATER STATUS LIGHT Ex db IIC, Ex tb IIC TECHNICAL DRAWINGS

### TYPICAL CONFIGURATION HAZARDOUS AREA

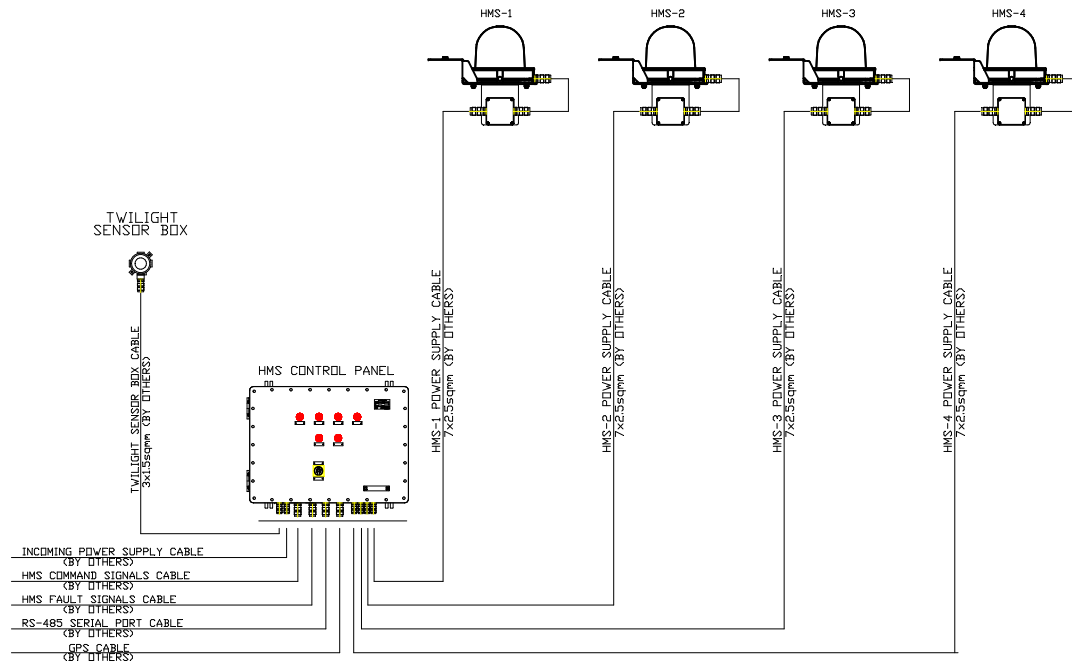

### TYPICAL CONFIGURATION SAFE AREA PANEL

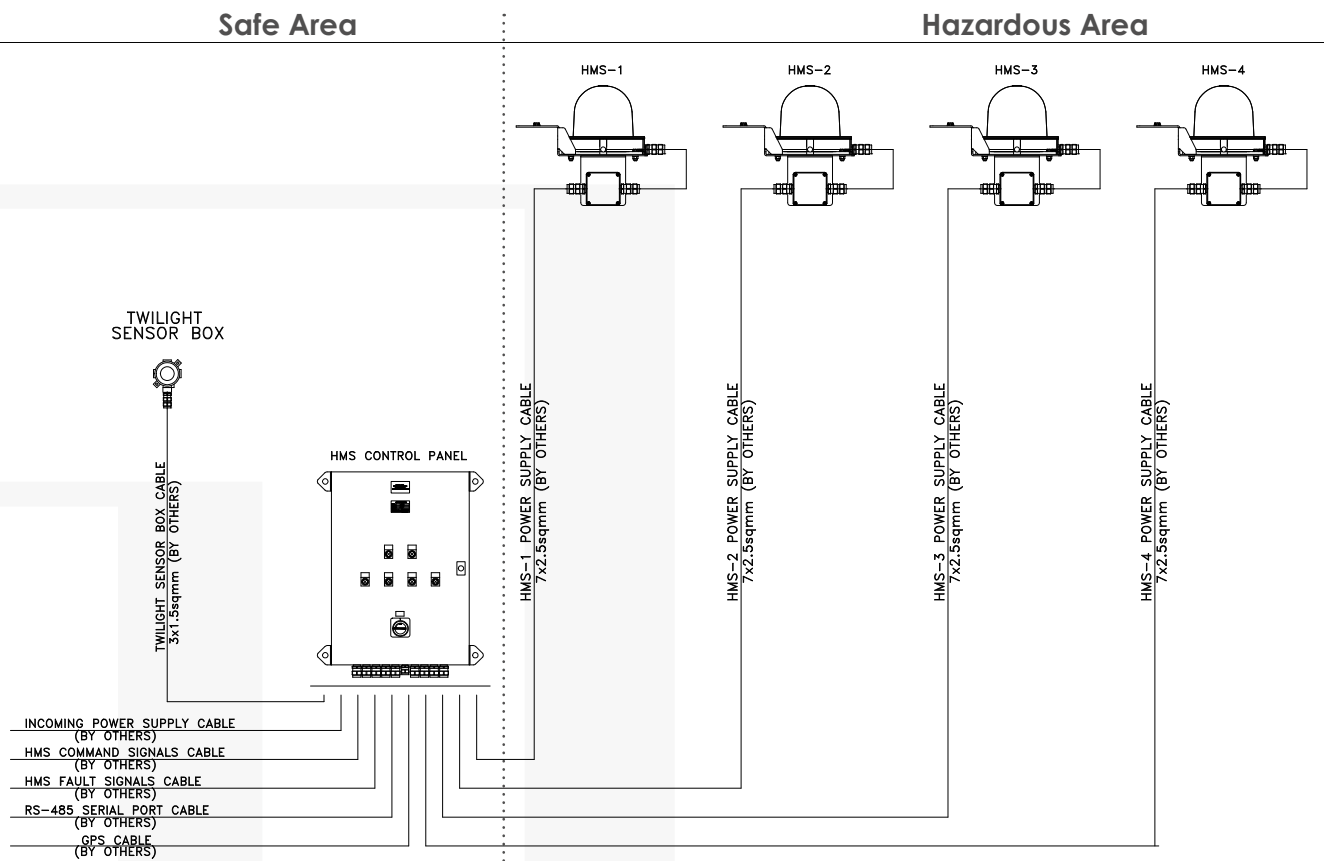



# HELIDECK LIGHTS

## HELIDECK STATUS WAVE OFF LIGHT WOL-LXS-CAP437-Ex



- Colour aviation: **RED flashing 120fpm**
- **Min. 700cd between 2° - 10° and at least 176cd at all other angles of elevation**
- **Intensity dimmers to 60cd while helicopter is landed on deck and flash rate dimmers to 60fpm**
- Long life time **>10 years** life expectancy
- **Low** consumption
- **Stabilised light** output
- **Low wind** load factor
- **Easy** to install
- **Light intensity emission adjustable from remote**
- **Degree of protection:** IP66
- **ATEX execution:**  
II 2GD Ex db eb IIC T4 ... Gb;  
Ex tb IIIC T135°C Db
- **IECEx execution:**  
Ex db eb IIC T4 Gb  
Ex tb IIIC T135°C Db

**PATENTED**

**NOTE:** Electronic components to be installed in a dedicate enclosure

### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION



# HELIDECK LIGHTS

## HELIDECK STATUS WAVE OFF LIGHT TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Based on LED technology
- Horizontal beam radiation 360°
- PMMA lens
- Vertical beam spread:

Elevation (E)	Luminous Intensity
$2^{\circ} < E \leq 10^{\circ}$	min. 700cd
$>10^{\circ}$	176cd

-180°                      Azimuth                      +180°

### MECHANICAL FEATURES

- Painted aluminium body, painted RAL 7035
- Borosilicate glass cover protection
- Terminal box for 2,5mm<sup>2</sup> wires
- Degree of protection: IP66
- Operating temperature: -52°C to +60°C
- Unit weight: 16kg

### ELECTRICAL FEATURES

- Power supply 12/24Vdc or 115/230Vac from Luxsolar control panel
- Power consumption 56W
- LED fed at constant current

### APPLY TO

- The aeronautical meaning of a flashing red light is either "do not land, aerodrome not available for landing" or "move clear of landing area"

### CERTIFICATE

- ATEX certificate
- IECEx certificate
- CE marking


### COMPLIANCE

- CAP437 "Standard for offshore Helicopter denoting Areas", par. 4.25
- CAA Paper 2008/01 "Specification for an offshore helideck status light system"


### ORDER CODE

**WOL-LXS-CAP437-EX-8**


FRONT VIEW

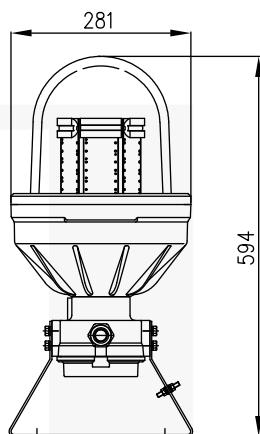

SIDE VIEW

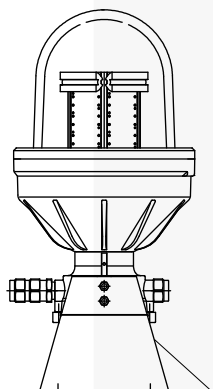

FIXING DETAILS

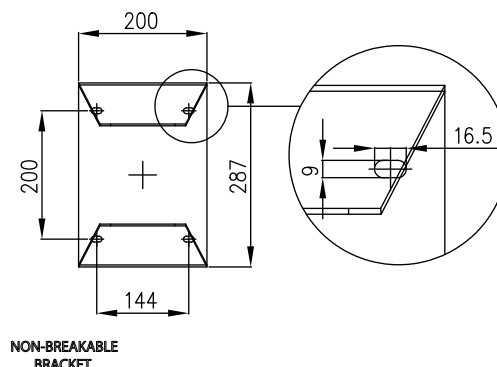

# HELIDECK LIGHTS

## PERIMETER LIGHT Ex - TLOF SST-LXS-Ex-TLOF



- **Steady burning GREEN light**
- Long life time **>10 years** life expectancy
- **Low** consumption
- **Stabilised** light output
- **Easy** to install
- **No RF-radiations**
- **ATEX execution:**
  - II 2GD Ex db IIC T...Gb;
  - Ex tb IIIC T...Db
- **IECEx execution:**
  - Ex db IIC T... Gb;
  - Ex tb IIIC T...Db

**NOTE:** Electronic components to be installed in a dedicate enclosure

### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION



# HELIDECK LIGHTS

## PERIMETER LIGHT Ex - TLOF TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal beam radiation 360°

Elevation (E)	Luminous Intensity
$20^{\circ} < E \leq 90^{\circ}$	3 cd
$13^{\circ} < E \leq 20^{\circ}$	8 cd
$10^{\circ} < E \leq 13^{\circ}$	15 cd
$5^{\circ} < E \leq 10^{\circ}$	30 cd
$2^{\circ} \leq E \leq 5^{\circ}$	15 cd

-180° Azimuth +180°

### MECHANICAL FEATURES

- Natural finish SS316L body
- Borosilicate Glass Dome
- Degree of protection: IP66
- Operating temperature: -40°C to +70°C

### ELECTRICAL FEATURES

- AC power supply 230VAC
- LED feeded at constant current

### OPTIONS

- Power supply 24VDC

### CERTIFICATIONS

- ATEX certificate
- IECEx certificate
- CE marking


### COMPLIANCE

- CAP437 "Standard for offshore Helicopter donating Areas", Chapter 4
- ICAO, Annex 14, Vol. II - Heliports - par. 5.3.7
- ICAO, Heliport Manual, Ed. III - par. 5.2.3.8


### ORDER CODE

**SST-LXS-Ex-TLOF**

### TOP VIEW

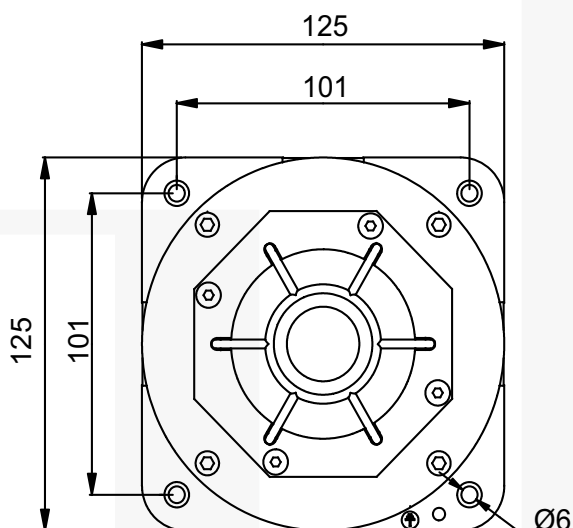

### LATERAL VIEW

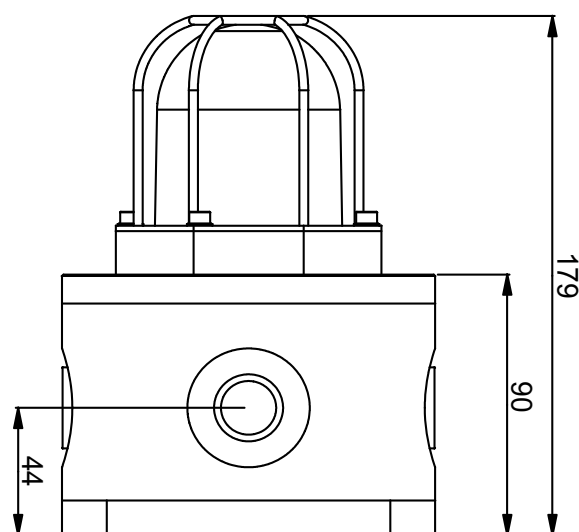

# HELIDECK LIGHTS

## REPEATER LIGHT Ex SST-LXS-EX-REP



- **Steady burning RED light**
- Long life time **>10 years** life expectancy
- **Low** consumption
- **Stabilised** light output
- **Easy** to install
- **No RF-radiations**
- **ATEX execution:**
  - II 2GD Ex db IIC T...Gb;
  - Ex tb IIIC T...Db
- **IECEx execution:**
  - Ex db IIC T... Gb;
  - Ex tb IIIC T...Db

### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION



# HELIDECK LIGHTS

## REPEATER LIGHT Ex TECHNICAL SPECIFICATION AND DRAWING

### OPTICAL FEATURES

- Horizontal beam radiation 360°

Elevation	Azimuth	Intensity (min)
0° to 90°	-180° to +180°	min 16cd max 60cd

### MECHANICAL FEATURES

- Natural finish SS316L body
- Borosilicate Glass Dome
- Degree of protection: IP66
- Operating temperature: -40°C to +70°C

### ELECTRICAL FEATURES\*

- AC power supply 230VAC
- LED feeded at constant current

### OPTIONS

- Power supply 24VDC

### CERTIFICATIONS

- ATEX certificate
- IECEx certificate
- CE marking


### COMPLIANCE

- CAP437 "Standard for offshore Helicopter denoting Areas"
- CAA Paper 2008/01 "Specification for an offshore helideck status light system"


### ORDER CODE

**SST-LXS-EX-REP**

TOP VIEW

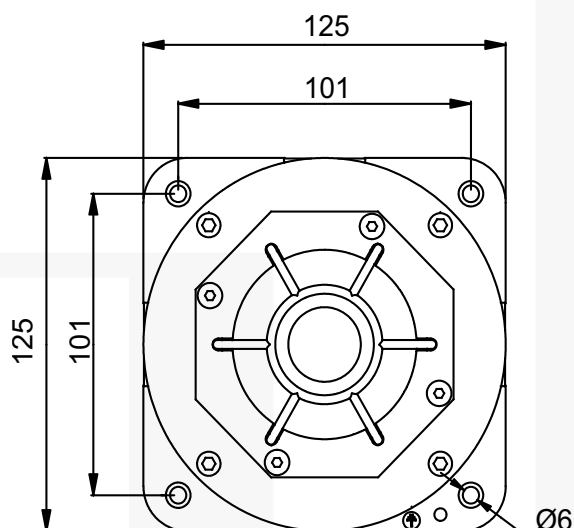


LATERAL VIEW

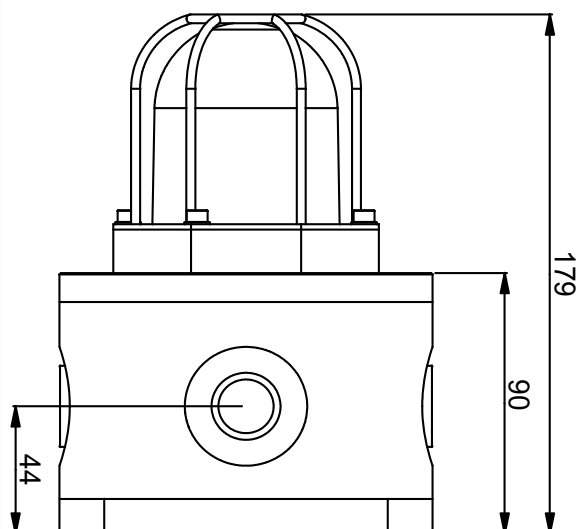

# HELIDECK LIGHTS

## HELIDECK WINDSOCK COLLAPSIBLE VERSION

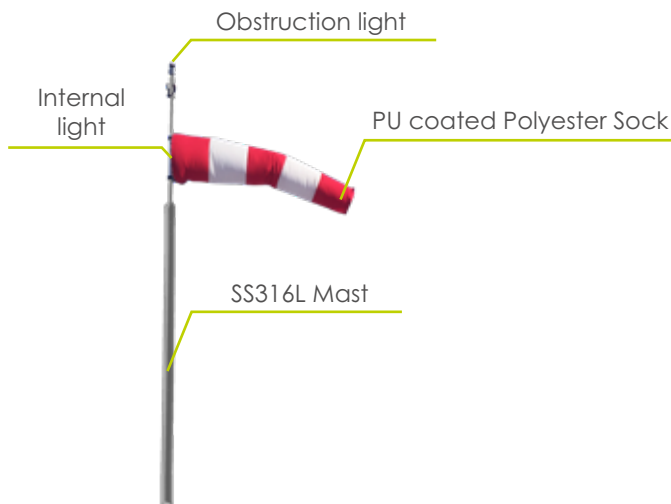

- **Sock colour: ORANGE/WHITE/RED&WHITE stripes**
- **Designed to be visible from up to 200m**
- **Collapsible mechanism\***
- **Compliance: ICAO**
- **Ex marking for lights used:**
  - II 2 GD Ex de IIC T6 Gb
  - Ex tb IIIC T67°C Db, IP66

\* Collapsible mechanism: when a helicopter hits the Windsock mast, the pole falls to the ground without breaking

**NOTE:** Lights are covered by ATEX or IECEx certificate

### CERTIFICATION



### COMPLIANCE



### FEATURES



### TYPICAL APPLICATION





# HELIDECK LIGHTS

## HELIDECK WINDSOCK

### TECHNICAL SPECIFICATION AND DRAWING

#### KEY FEATURES

- Sock colour: ORANGE/WHITE/RED&WHITE stripes
- Designed to be visible from up to 200m

#### MECHANICAL FEATURES


- Sock material: Polyester PU coated
- Sock dimensions: 2,4m long x 0,60m mouth diameter x 0,30m tail diameter
- Mast material: SS316L natural finish (not painted), collapsible mechanism
- Mast height: 3m to windsock centerline

#### CERTIFICATIONS



- CE marking

#### COMPLIANCE

- ICAO Annex 14 Vol. II Heliports - Chapter 5
- ICAO Annex 14 Vol. I Visual Aids - Chapter 5

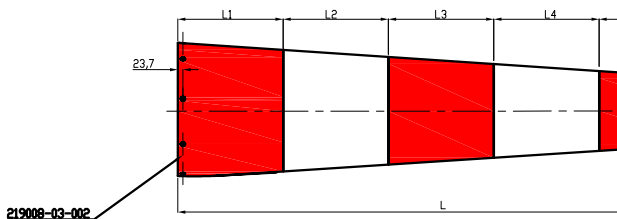

STANDARD WINDSOCK MAST WITH INTERNAL LIGHTING	
Base Plate Measurements	280x280mm
Height of Windsock above Ground	>3m
Windsock Throat Opening	600mm
Windsock Length	2400mm

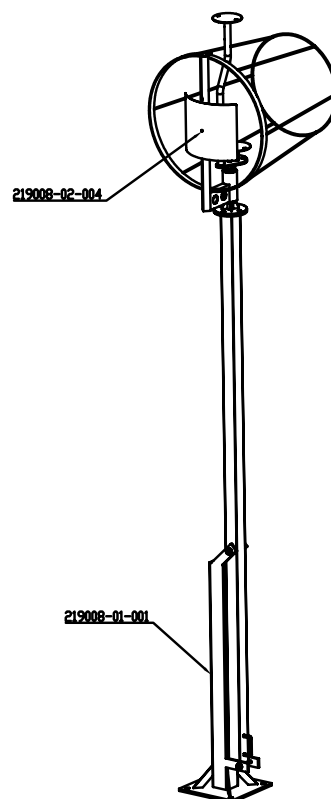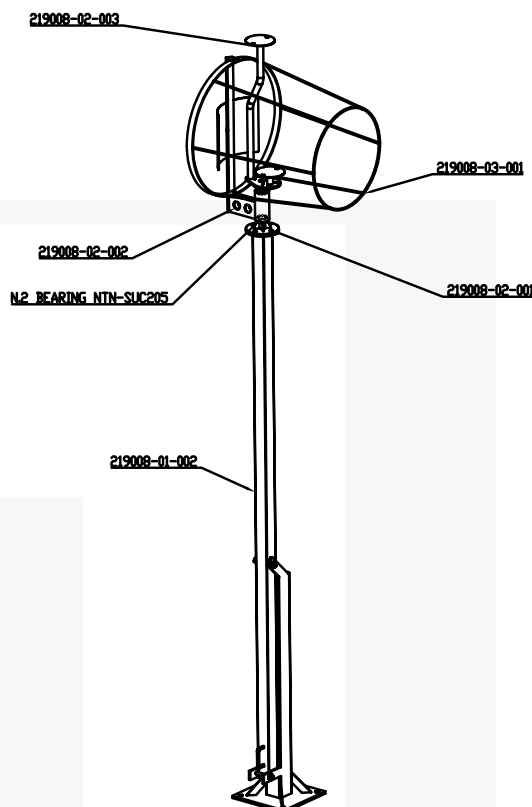

## NOTES

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

## NOTES

[illegible]

## NOTES

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

# CONTACTS

## **CE2K S.r.l. - Luxsolar®**

---

**Phone:** +39 0341-260926

**E-mail:** [info@ce2k.com](mailto:info@ce2k.com) - [lx@luxsolar.com](mailto:lx@luxsolar.com)

**Web sites:** [www.ce2k.com](http://www.ce2k.com) - [www.luxsolar.com](http://www.luxsolar.com)

- **LinkedIn:** Luxsolar Italia



- **YouTube:** Luxsolar





Luxsolar® is a department of CE2K S.r.l.  
Via Sabatelli 38, 23868 Valmadrera (LC) - Italy



[www.luxsolar.com](http://www.luxsolar.com)