RED LIGHTHOUSE-DOCK LIGHT 12-17nM

SAFE AREA IP66





RED LIGHTHOUSE-DOCK LIGHT 12-17nM TECHNICAL SPECIFICATIONS

KEY FEATURES

- Based on LED technology
- Night mode, red flashing (Isophase or occulting)
- Long life time >10+ years life expectancy
- Low consumption
- Stabilised light output
- Lightweight and compact
- Low wind load factor
- Alarm/remote status control
- Easy to install
- No RF-radiations
- Light output alignment device

ELECTRICAL FEATURES

- Average power consumption for isophase flashing (ISO W): 25W
- Average power consumption for occulting flashing (Oc. W): from 30W to 50W
- LED feeded at constant current
- Lightning protection surge arrester

OPTICAL FEATURES

- Horizontal beam radiation 360° or 180°
- PMMA lens
- Light intensity for luminous range for 74% (0,74T) atmospheric transmissivity

OPTIONS

- Twin version: two galvanically separated circuits in the same fixture
- Anti bird protection
- Beacon support bracket
- Power supply AC or DC
- GPS (Global Position System) syncro
- Available with solar battery system
- Available for 7nM,10nM, 12nM, 17nM

MECHANICAL FEATURES

- Anodised aluminium body with heat-sink for natural draft air cooling
- RAL7035 painted aluminium body lamp
- Bottom wind collector for central heat-
- sink coolingBorosilicate glass cover protection
- Silicon gasket
- Degree of protection: IP66
- Operating temperature: -50°C to +80°C
- Storage temp. range: -20°C to +45°C
- Lamp unit weight: 6kg

APPLY TO

- Lighthouse:


 Red light is used to identify dangerous areas and warn ships that the waters are not safe (R)
 Red light is used to identify the
 - starboard (right) side of a channel (R)

INTERNATIONAL REGULATION


- IALA Maritime Buoyage System and other aids to navigation
- IALA guideline No. 1049, Edition 2, December 2007
- CE marking

RED LIGHTHOUSE-DOCK LIGHT 12-17nM

ODER CODE

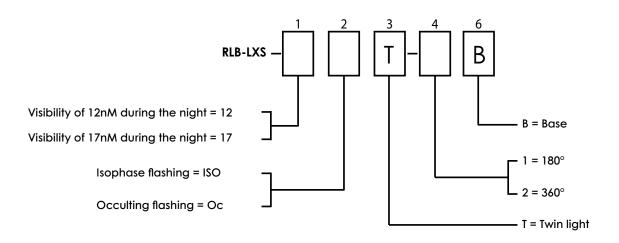

BASE APPLICATION

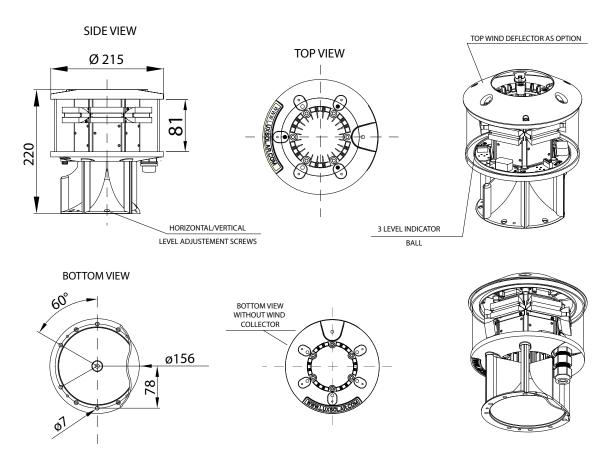

RED LIGHTHOUSE-DOCK LIGHT 12-17nM

SIDE TYPE INSTALLATION

